

1

2


3

4

5

6

7

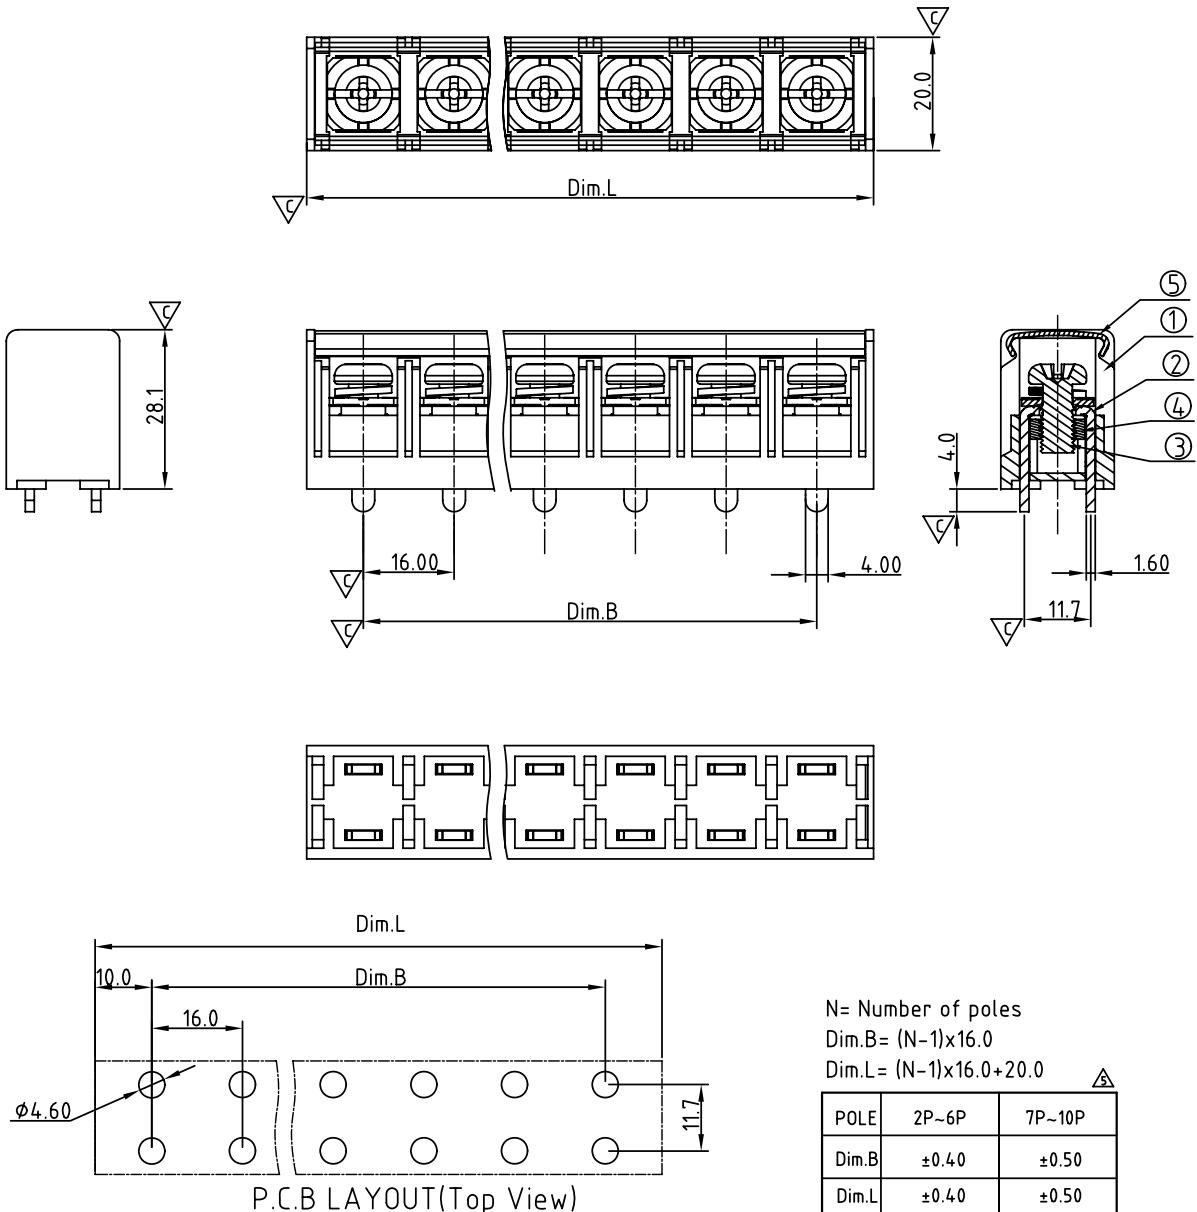

SIGN	DATE	DESCRIPTION	APPROVER
△	11/10/10	Current is changed from 75A to 65A	Aaron
△	11/10/10	Wire range is changed from 10-4 AWG to 10-6 AWG	Aaron
△	11/10/10	Add is cULus Mark	Aaron
△	12/12/12	Change the screw plating specification	Jacky
△	12/12/12	Change the dimensional tolerance	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT: 600 V, 65A △
 WITHSTAND VOLTAGE: AC 3000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115°C
 SCREW TORQUE VALUE: 26 Lb-In.
 WIRE RANGE: 10 - 6 AWG △
 1) BODY: THERMOPLASTICS, UL94-V0 BLACK
 2) TERMINAL: BRASS, 1.6t, Tin PLATED
 △ 3) TERMINAL SCREWS WITH WASHER: STEEL, M6.0
 4) TERMINAL NUT: STEEL Ni PLATED M6.0
 5) COVER: PC, TRANSPARENT

APPROVAL: cULus △

Critical dimension: △

PART NO.:

YK 901 xx 2 x x 00G

RoHS compliant (lead<4%) In copper Alloy

MARK

0: "@" MARK
 1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
 △ 1: TERMINAL: G/F, SCREW: Zinc
 2: TERMINAL: Sn, SCREW: G/F
 △ 3: TERMINAL: Sn, SCREW: Zinc

NO. OF POLES

02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 :
 10: 10 POLES

ANYTEK				CUSTOMER COPY		
TITLE YK901 With cover and W/o flange SERIES				DWG NO. 8YK0001-901		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Jacky 2012.12.12	Jacky 2012.12.12		UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[YK9010223000G](#) [YK9010323000G](#) [YK9010423000G](#) [YK9010523000G](#) [YK9010623000G](#) [YK9010723000G](#)
[YK9010823000G](#) [YK9010923000G](#) [YK9011023000G](#)