




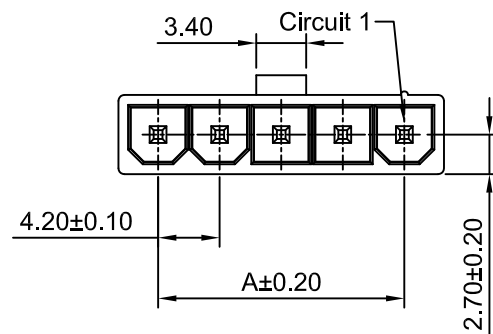


3P~12P

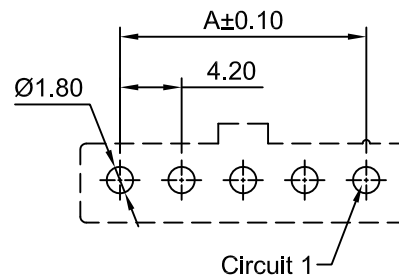


P.C.B LAYOUT
TOLERANCE:±0.05

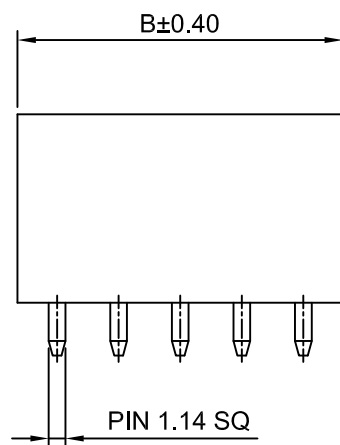

2P

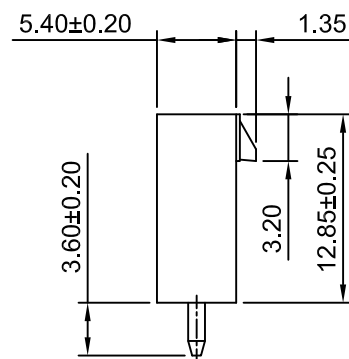

3P~12P

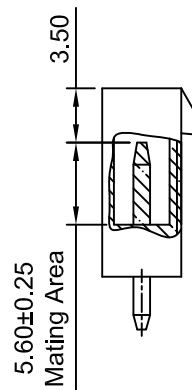

2P

Ordering Information:
C4201WV-XP - *** - ** - ***
1 2 3 4

1.Part No.

2.Material:

(blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(blank): Natural

BK: Black

RD: Red

YL: Yellow

BL: Blue

4.Finish:


(blank): Tin over Nickel

G: Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u", Mating Area)

G30: Gold over Nickel(Au:30u", Mating Area)



SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)

(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions






Part No.	Dimensions(mm)	
	A	B
C4201WV-2P	4.20	9.60
C4201WV-3P	8.40	13.80
C4201WV-4P	12.60	18.00
C4201WV-5P	16.80	22.20
C4201WV-6P	21.00	26.40
C4201WV-7P	25.20	30.60
C4201WV-8P	29.40	34.80
C4201WV-9P	33.60	39.00
C4201WV-10P	37.80	43.20
C4201WV-11P	42.00	47.40
C4201WV-12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2		
DRN	CHK	APVD	4.20mm PITCH 180° SINGLE ROW DIP WAFER	
Chengbiao Ye	DianKui Wan	Jack Yin		
General Tolerance		THIRD ANGLE PROJECTION		
x.xx±0.25				
x.xxx±0.20				
x.xxxx±0.15				
ANGLES ±1°				
DRAWING NO			REV	
C4201WV-XP			A6	

A6	CHANGE THE DRAWING	2023.03.09
A5	CHANGE THE TOLERANCE	2023.02.23
A4	ADD THE DRAWING OF 2P	2020.08.17



CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 4.20mm PITCH 180° SINGLE ROW DIP WAFER	
mm	3:1	2 of 2		
DRAWN Chengbiao Ye	CHK'D Diankui Wan	APPR Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201WV-XP	REV A6
x,x±0,25 x,x±0,20 x,x±0,15 ANGLES ±1°				
				