
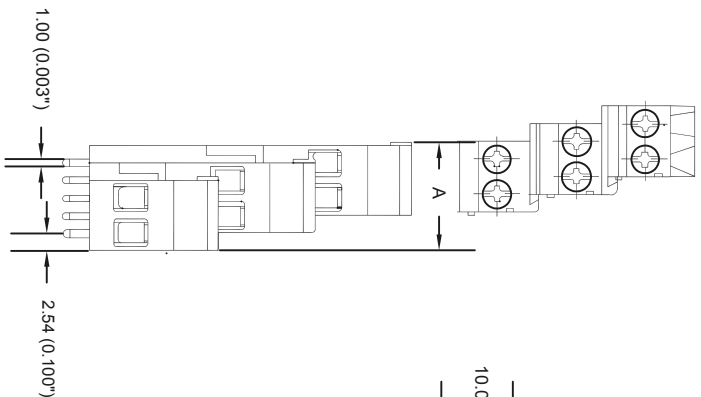


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC—F005.DWG

REVISIONS				DOC. NO. SPC--F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
			AMU	30-08-10	Jogon	30-08-10	XXX	13-09-10	

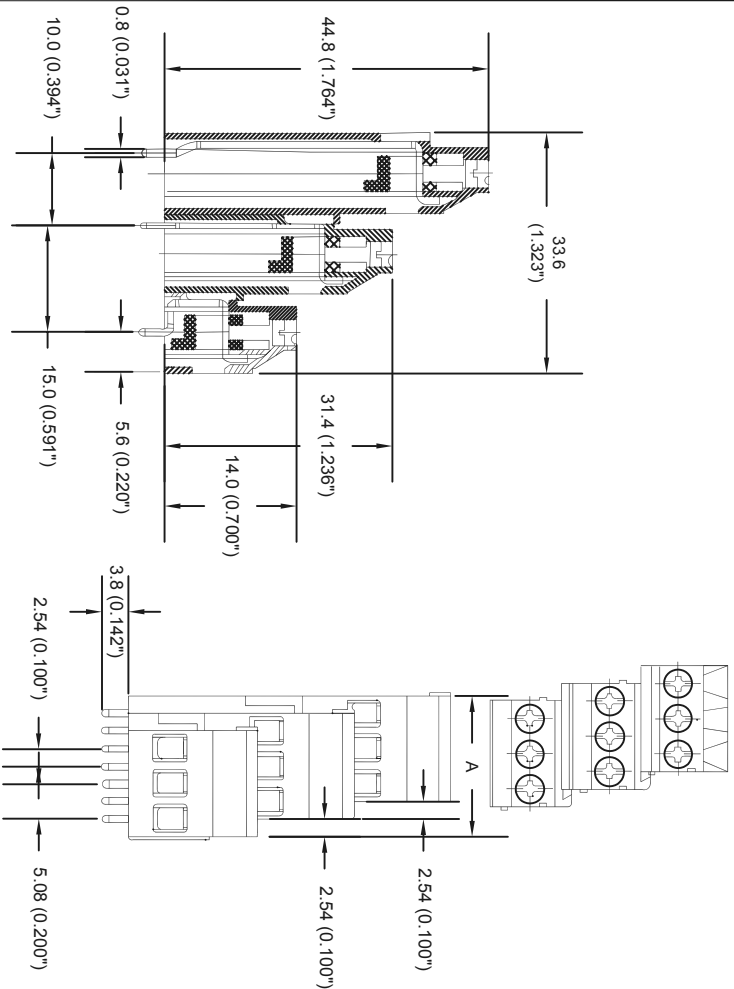

Specifications

Rated voltage: AC 300V
Rated current: 27A
Wire size: 24 to 12AWG
Housing material : Polyamide66(UL94V-0)
Cage clamp : Brass, Tin plated
Terminal : Brass, Tin plated
Screw Size : M2.6, steel, ZnK plated
Operating Temperature: -40°C to +105°C
Torque: 5.0 lb-inch
PCB hole Diameter: φ1.5mm

Note:
Screw Plating: Changes are available upon request

Specification Tables

A (mm)	A (inch)	Part Number
15.2	0.600	MB532-508MA06
20.3	0.800	MB532-508MA09

Part Number Table

Description	Part Number
Terminal Block	MB532-508MA09

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

DRAWING TITLE:

Terminal Block

DRAWN BY:	DATE:	DRAWING TITLE:	
AMU	30-08-10	Terminal Block	
CHECKED BY:	DATE:	SIZE	DWG. NO.
Jogon	30-08-10	A	XXX
APPROVED BY:	DATE:	SCALE:	NTS
XXX	13-09-10	U.O.M.: Millimeters	SHEET: 1 OF 1