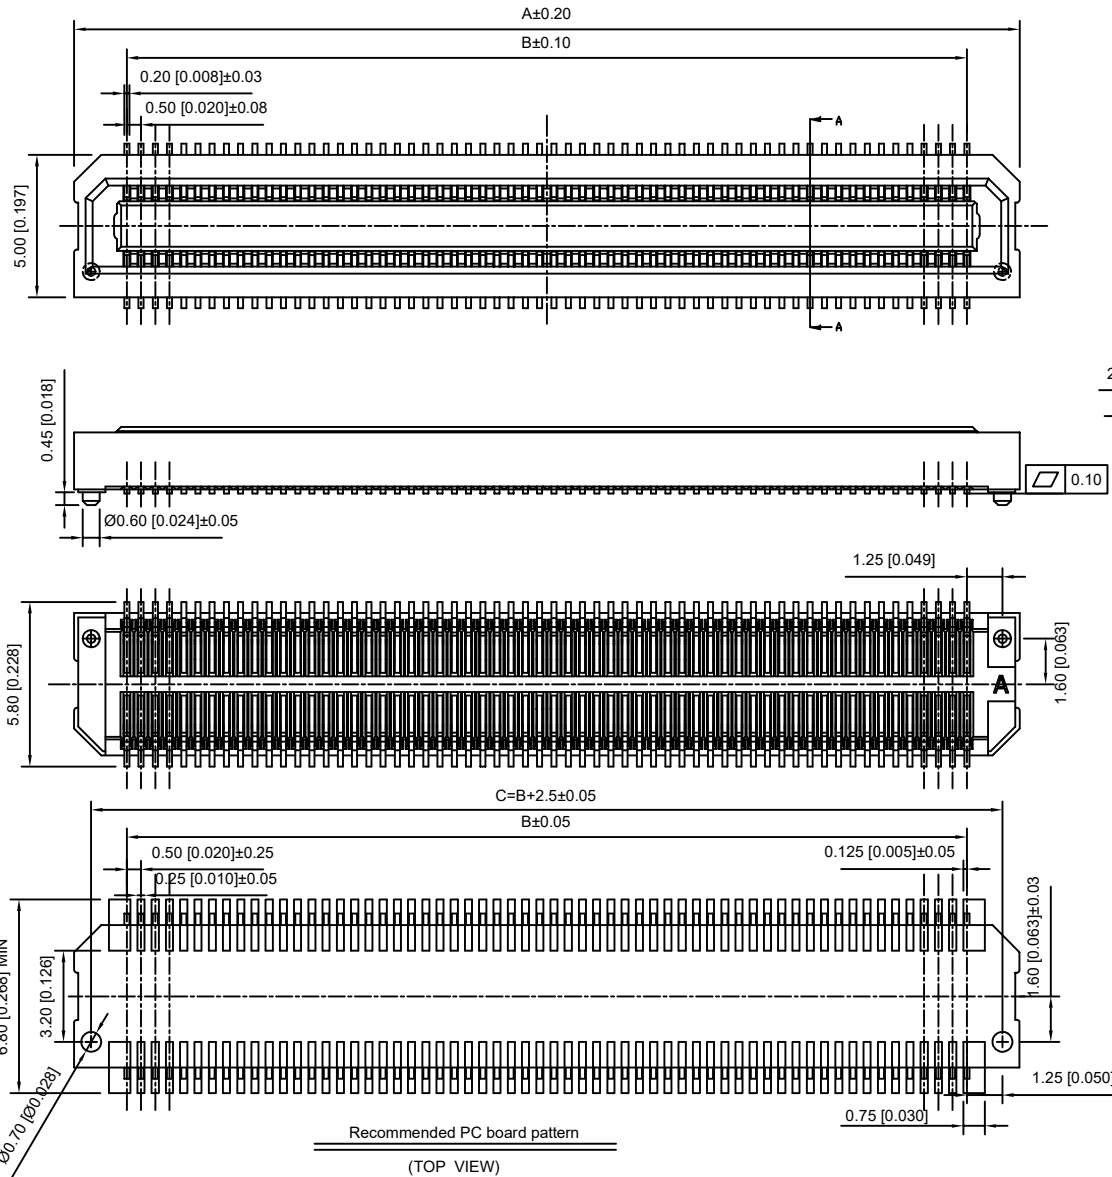


Specifications:
规格:
Voltage rating:60V AC/DC
额定电压: 60V AC/DC
Current rating:0.5A AC/DC
额定电流: 0.5A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-55℃~+105℃
温度范围: -55℃~+105℃
Insulation resistance :500MΩ min
绝缘电阻: 500MΩ Min
Contact resistance:80mΩ Max
接触电阻: 80mΩ Max

X0582 F V S-XX A S-LP V01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:R-Straight 90°
- 4.Welading Way:S-SMT
- 5.Row No.Pin No:XX-20-120P
- 6.Female Height:A=2.35mm ,
- 7.Special No:S-With positioning Columnm
- 8.Material:LP-LCP UL 94V-0
- 9.Plating:V01-Gold Flash

H
3.0mm
3.5mm
4.0mm

Poles	A	B
20	8.20	4.50
22	8.70	5.00
30	10.70	7.00
34	11.70	8.00
40	13.20	9.50
50	15.70	12.00
60	18.20	14.50
70	20.30	17.00
80	23.20	19.50
100	28.20	24.50
120	33.20	29.50

X0582FVS-XXAS-LPV01	LCP	Phosphor copper	X0582W
PART NO	Material	Material(Pin)	Suitable XKE Wafer

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 0.5mm BTB Style Connector		
DWN		VIEW: 	PART NO.: X0582FVS-XXAS-LPV01		
CHKD		UNIT: mm/in	DWG NO.: X-X0582FVS-XXAS-LPV01		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISIC
				1/1	A0