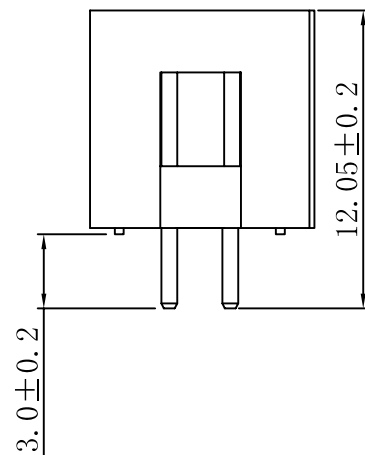
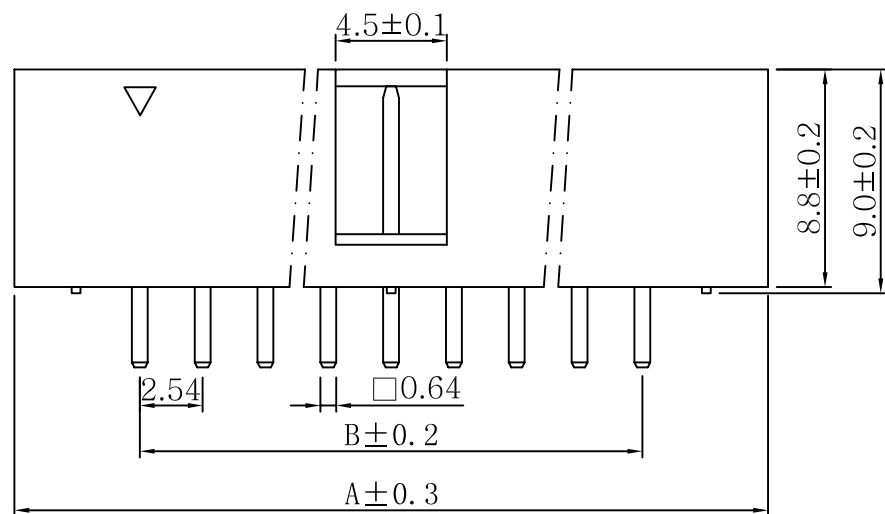
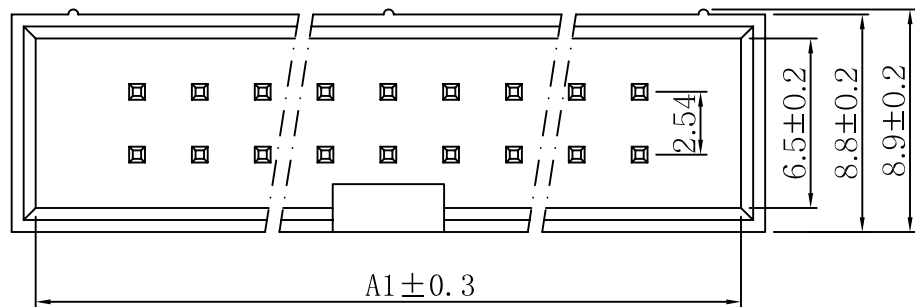


P.C.B Layout

一. 电气性能:

1-1. 额定电流: 3A AC DC.

1-2. 接触电阻:  $\leq 20\text{m}\Omega$

1-3. 绝缘电阻:  $\geq 1000\text{M}\Omega$  Min

1-4. 耐压: 550V AC/Minute

二. 物理特性:

2-1. 操作温度:  $-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$

2-2. 焊接温度:  $+220^{\circ}\text{C}$ , 10s max

三. 材质:

3-1. 塑胶: PBT(Black) UL94V-0

3-2. 插针: Brass/Gold plated

| PIN | A     | AI    | B     |
|-----|-------|-------|-------|
| 3   | 15.24 | 12.94 | 5.08  |
| 4   | 17.78 | 15.48 | 7.62  |
| 5   | 20.32 | 18.02 | 10.16 |
| 6   | 22.86 | 20.56 | 12.70 |
| 7   | 25.40 | 23.10 | 15.24 |
| 8   | 27.94 | 25.64 | 17.78 |
| 9   | 30.48 | 28.18 | 20.32 |
| 10  | 33.02 | 30.72 | 22.86 |
| 11  | 35.56 | 33.26 | 25.40 |
| 12  | 38.10 | 35.80 | 27.94 |
| 13  | 40.64 | 38.34 | 30.48 |
| 14  | 43.18 | 40.88 | 33.02 |
| 15  | 45.72 | 43.42 | 35.56 |
| 16  | 48.26 | 45.96 | 38.10 |
| 17  | 50.80 | 48.50 | 40.64 |
| 18  | 53.34 | 51.04 | 43.18 |
| 19  | 55.88 | 53.58 | 45.72 |
| 20  | 58.42 | 56.12 | 48.26 |
| 21  | 60.96 | 58.66 | 50.80 |
| 22  | 63.50 | 61.20 | 53.34 |
| 23  | 66.04 | 63.74 | 55.88 |
| 24  | 68.58 | 66.28 | 58.42 |
| 25  | 71.12 | 68.82 | 60.96 |
| 26  | 73.66 | 71.36 | 63.50 |
| 27  | 76.20 | 73.90 | 66.04 |
| 28  | 78.74 | 76.44 | 68.58 |
| 29  | 81.28 | 78.98 | 71.12 |
| 30  | 83.82 | 81.52 | 73.66 |

图名: 2.54-2xNA

图号: XXXXXXXXXXXXXXXXXXXX

未标注公差

|     |            |      |                 |
|-----|------------|------|-----------------|
| XX. | $\pm 0.40$ | XX.° | $\pm 2^{\circ}$ |
| X.  | $\pm 0.30$ | .XX° | $\pm 1^{\circ}$ |
| .X  | $\pm 0.20$ |      |                 |
| .XX | $\pm 0.15$ |      |                 |

绘制:

韩金锋

单位:

MM

签发:

比例:

1:1

审核:

视图:

