





Type: Shroud
Pitch: 2 mm
Packaging: Bulk
Standard: IEC 61076-4-101

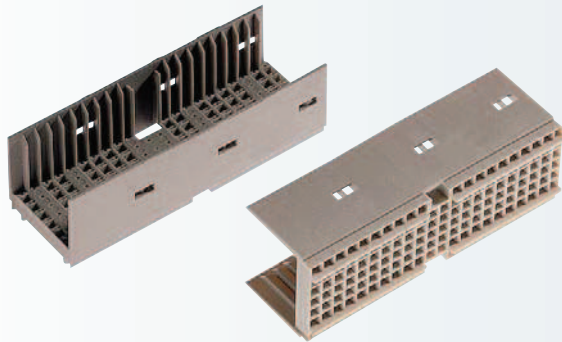

Technical Specifications on page 204

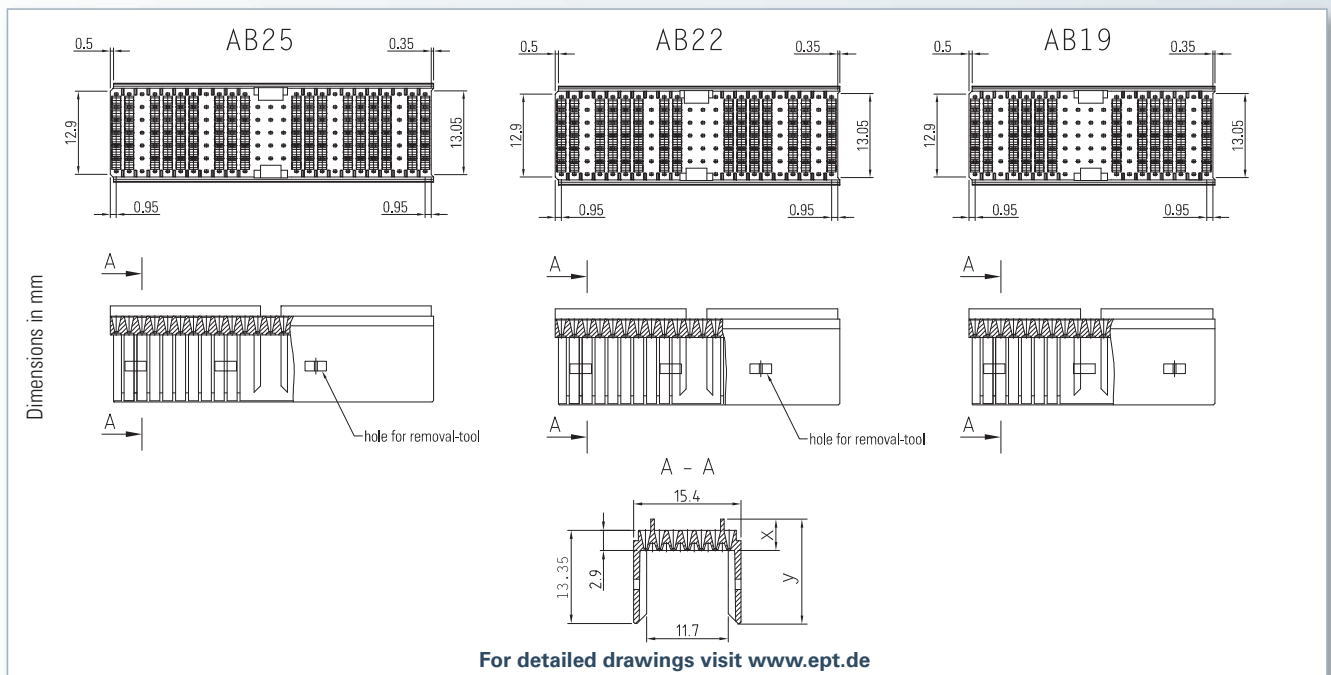

PCB thickness	X	Y	Part number		
			AB25	AB22 (cPCI RP 5)	AB19 (cPCI RP 3)
< 2.4 mm	6.3 mm	16.75 mm	243-5725-5/1	243-5722-5/1	243-5719-5/1
2.4 – 3.2 mm	4.9 mm	15.35 mm	243-5725-4/1	243-5722-4/1	243-5719-4/1
3.2 – 4.0 mm	4.5 mm	14.95 mm	243-5725-1/1	243-5722-1/1	243-5719-1/1
4.0 – 4.8 mm	3.7 mm	14.15 mm	243-5725-2/1	243-5722-2/1	243-5719-2/1
> 4.8 mm	2.9 mm	13.35 mm	243-5725-3/1	243-5722-3/1	243-5719-3/1

On request

- different designs and special types

Accessories

- Processing tools p. 321

Application

compatible with all male connectors with transfer zone