


Bandpass Filter

Features

- Sharp roll-off
- Ultra wide bandwidth
- Good VSWR
- Miniature shielded package

Applications

- Test and measurement
- Receiver front end applications
- Cellular network
- Civil aircraft communication radio

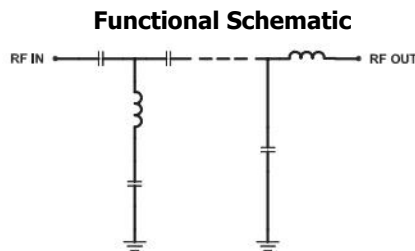




JY-BPF-C550+



50Ω 100 to 1000 MHz

Electrical Specifications at 25°C

Parameter		Frequency(MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	550	-	MHz
	Insertion Loss	100-1000	-	1.1	2.2	dB
	VSWR	100-1000	-	1.5	2.1	:1
Stop Band, Lower	Insertion Loss	DC-80	35	46	-	dB
	VSWR	DC-80	-	20	-	:1
Stop Band, Upper	Insertion Loss	1200-2000	30	39	-	dB
	VSWR	1200-2000	-	20	-	:1

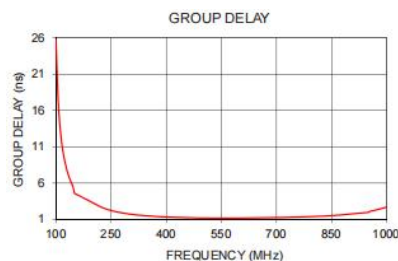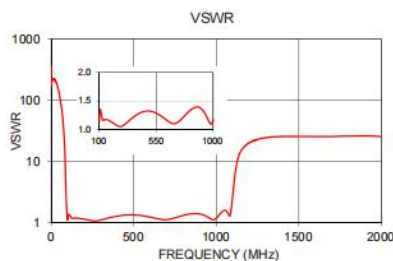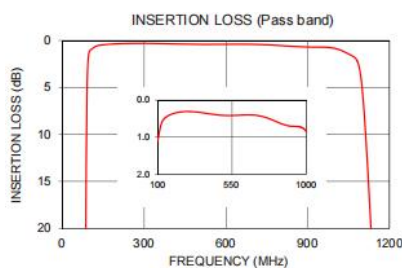

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	1 W max @ 25°C

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6,13
GROUND	1, 3, 4, 5, 7, 8,10,11,12,14

Outline Drawing

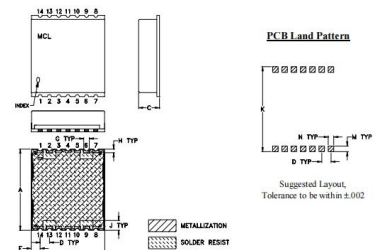

Outline Dimensions: Unit (mm)

A	22.10	H	1.02
B	20.32	J	2.67
C	6.35	K	23.11
D	2.54	L	-
E	2.46	M	1.52
F	-	N	1.52
G	1.52	P	-
WT	2.85g		

Suggested PCB Layout

