

Low Pass Filter

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.15:1 typ.@ passband
- aqueous washable

Applications




- satellite
- wireless communications
- receivers / transmitters

Low Pass Filter Electrical Specifications


PASSBAND (MHz) (loss < 2 dB)	fco (MHz) Nom. (loss 3 dB)	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-30	37	47-53	53-3000	1.15	20

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
0.5	0.50	0.01	24.98	0.5	16.64
25.0	0.86	0.01	25.36	1.0	16.66
30.0	1.08	0.01	24.46	3.0	16.92
36.0	1.85	0.05	22.30	5.0	16.88
37.0	2.62	0.14	17.45	6.0	16.86
39.0	4.17	0.33	7.75	9.0	17.18
40.0	6.92	0.45	6.00	10.0	17.34
42.0	12.41	0.68	2.51	12.0	17.65
45.0	23.23	0.76	1.47	13.0	17.93
47.0	30.50	0.84	1.21	15.0	18.49
53.0	50.90	1.81	0.84	18.0	19.49
100.0	52.85	0.47	0.25	21.0	20.94
500.0	85.89	4.68	0.07	23.0	21.98
1000.0	81.99	3.92	0.09	24.0	22.50
1400.0	76.06	1.88	0.20	25.0	23.31
2000.0	52.57	0.80	0.24	27.0	24.92
2600.0	53.56	0.54	0.48	28.0	26.15
3000.0	47.74	0.53	0.33	30.0	28.61

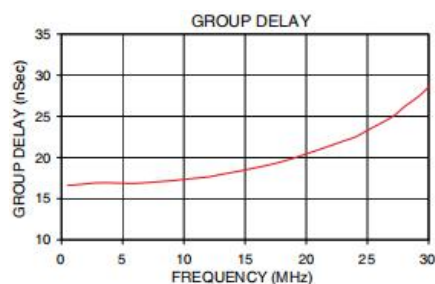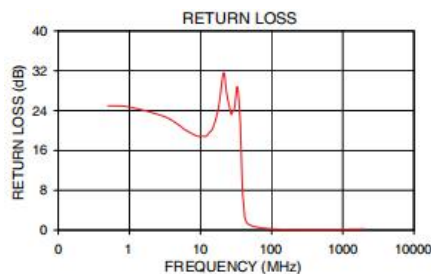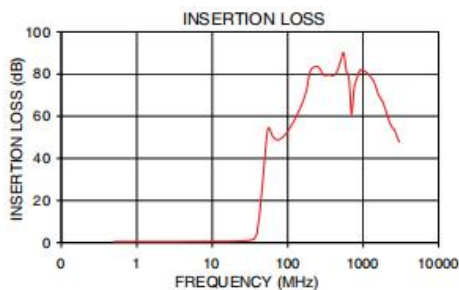

Functional Schematic



JY-RLP-30+



50Ω DC to 30 MHz

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C


RF Power Input* 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

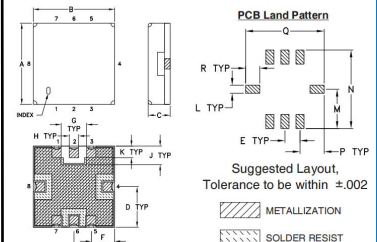

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R		wt.
.050	.040	.195	.390	.120	.390	.070		grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78		0.25

Suggested PCB Layout



- NOTES:
1. TRACE WIDTH IS SHOWN FOR FB4 WITH DIELECTRIC THICKNESS .005" ± .005"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK