
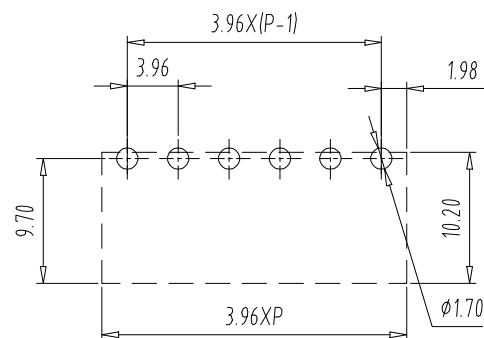

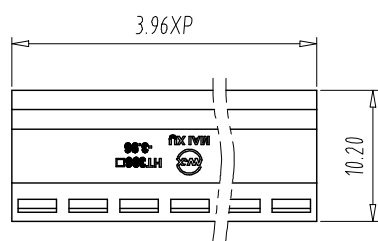


2		1	
REV	E.C.N NO.	CONTENT	CHK DATE

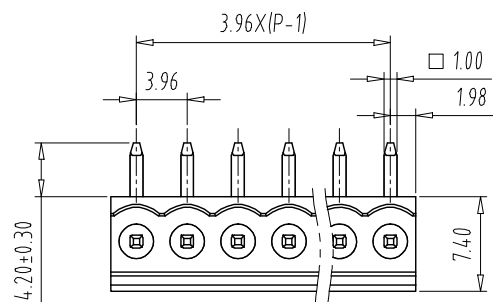

PCB Layout

Pitch Range In mm			Nominal Dimension Range In mm					—		
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
										
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

UL Standard

1.

Use group	B	C	D
Rated Current	8A	/	10A
Rated Voltage	300V	/	300V

2.withstanding voltage: AC1600V/1Min

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	10A	10A	10A

NOTES2:

1.Housing: PA66 (UL94V-0)

2.Solder Pin: Brass (Sn Plated)

NOTES3:

1.Pitch: 3.96mm Poles: 02-24P

2.Operating temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

3. RoHS Compliance

How to order

HT396R - 3.96 - XXP - XXXX - XX - X

产品型号 间距 根数 01:常规颜色 02-99:定制颜色 A-Z其他定制

颜色: 灰色:GY 橙色:OE 定制颜色 Cu-铜 Fe-铁
蓝色:BU 红色:RD
黑色:BK 透明色:TT
绿色:GN 黄色:YW
白色:WE

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	CKK	DATE	23.09.05	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE			HT396R-3.96-XXP			
 CIXI MAIXU ELECTRONICS CO., LTD. 慈溪市迈旭电子有限公司				NAME				
				DWGNO.				