
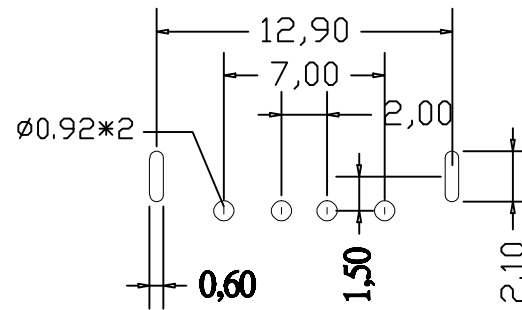
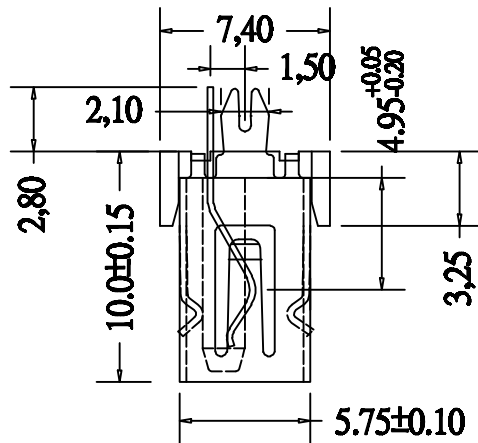


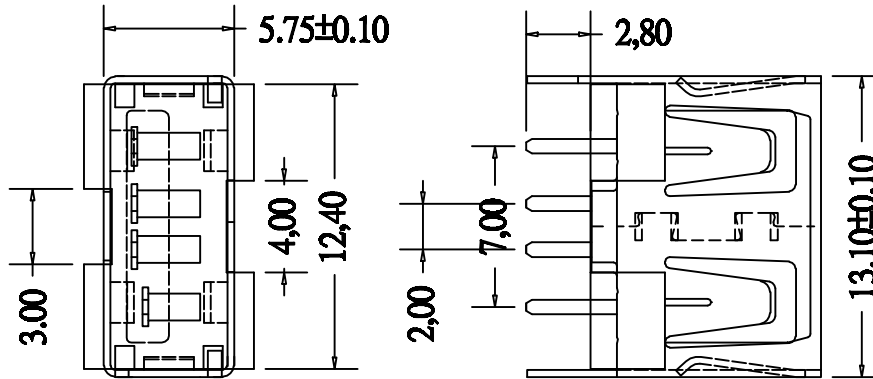

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retention
1.0kgf(MIN)

原材料:Material:

- 1.塑胶:Housing:
Hing Temperature Thermoplastics,
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U”(MIN)锡,镀金区域镀100—200U”镀金1U”

- 2.外壳:Shell:

铜壳四周镀80U”(MIN)锡

Nickel Plating

COMPONENT NO:	SmarTconn 瀚诚兴科技有限公司 SMARTCONN INT'L H.K CO.,LIMITED HTTP://WWW.SMARTCONN.COM.CN E-mail:saeles@smartconn.com.cn		
PART NO: SUB-04AF100A	TITLE: USB 4pin 短体直插 10.0MM 平口		
	REQUIRED DOCUMENTS: USB 4pin 短体直插 10.0MM 平口		
CHECKED:	SCALE: 1:1		
DRAWN: Engle	DRAWING:	THIRD ANGLE PROJECTION	
DATE: 2024-03-07	备注:		