



电气性能参数

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

原材料:Material:

1. 塑胶:Housing:

Hing Temperature Thermoplastics,
PBT White/Black

2. 端子:Contact:Copper Alloy C2680

3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:






1. 端子:Contact: Plated Gold in Mating Area
Tin On Solder Talls

2. 外壳:Shell:


Nickel Plating




产品尺寸

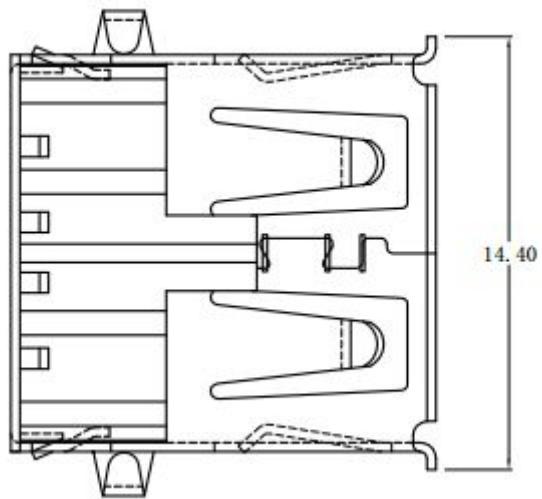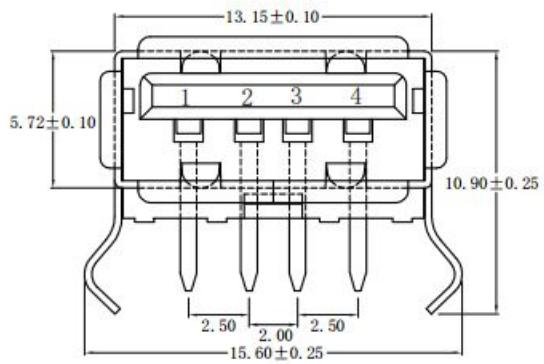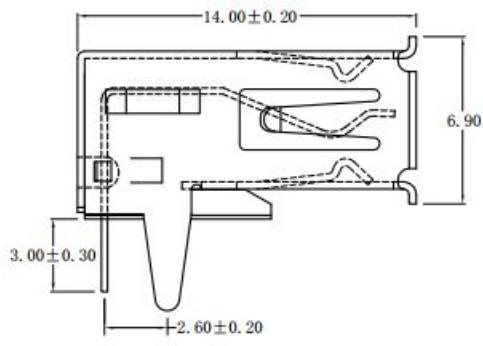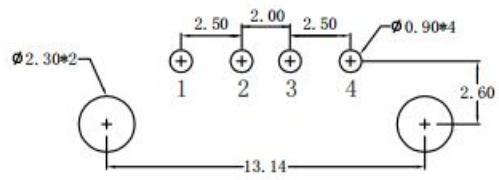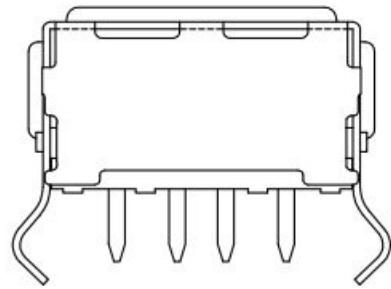


产品图片

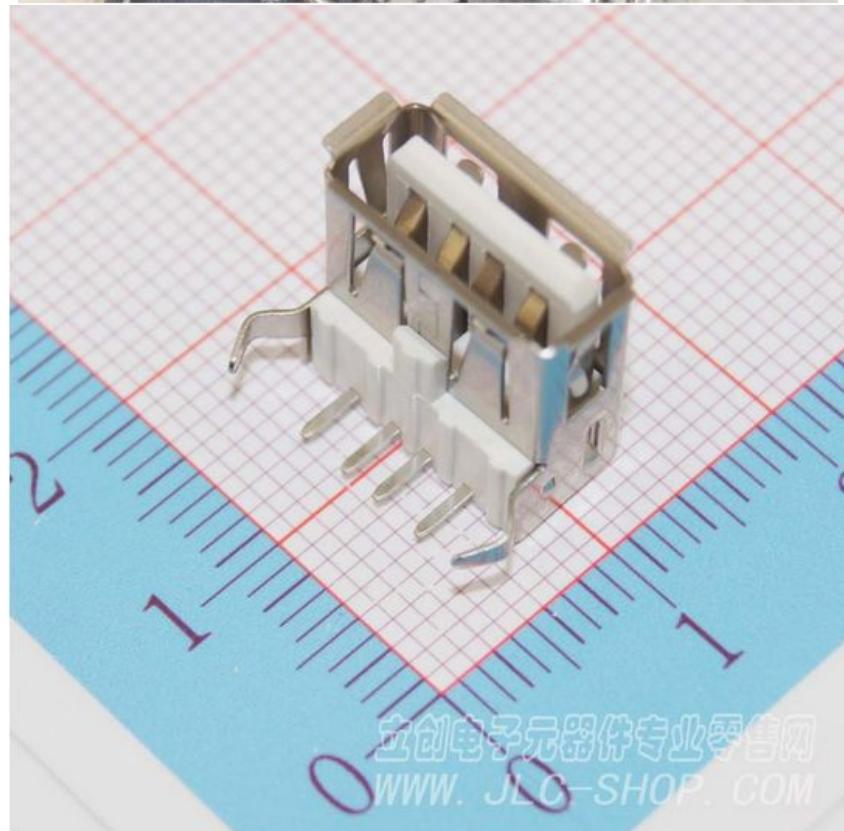


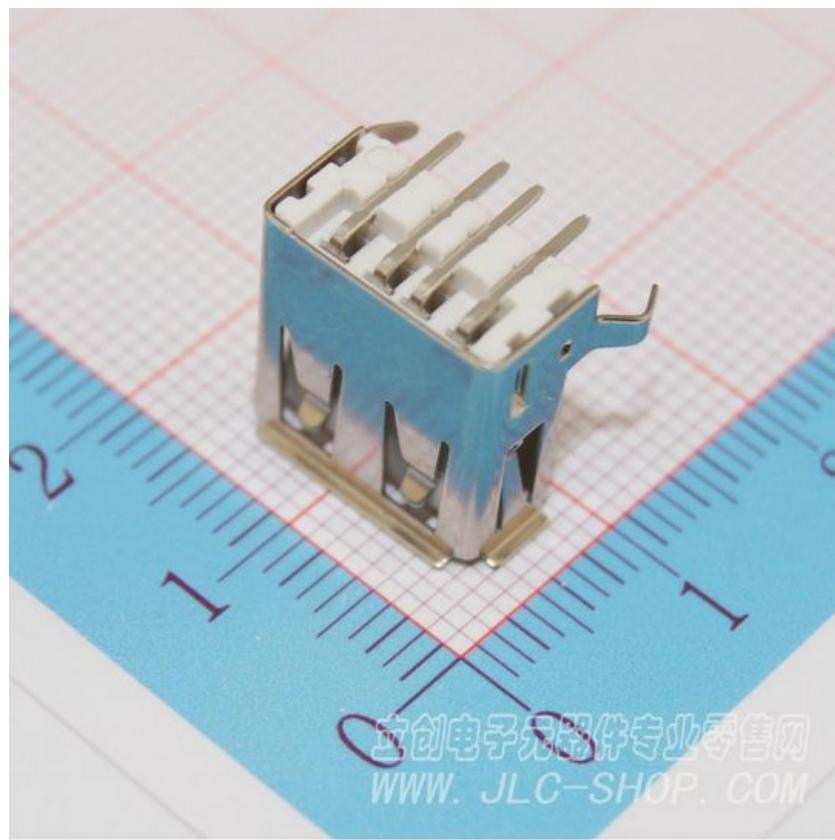

立创电子元器件专业零售网
WWW. JLC-SHOP. COM

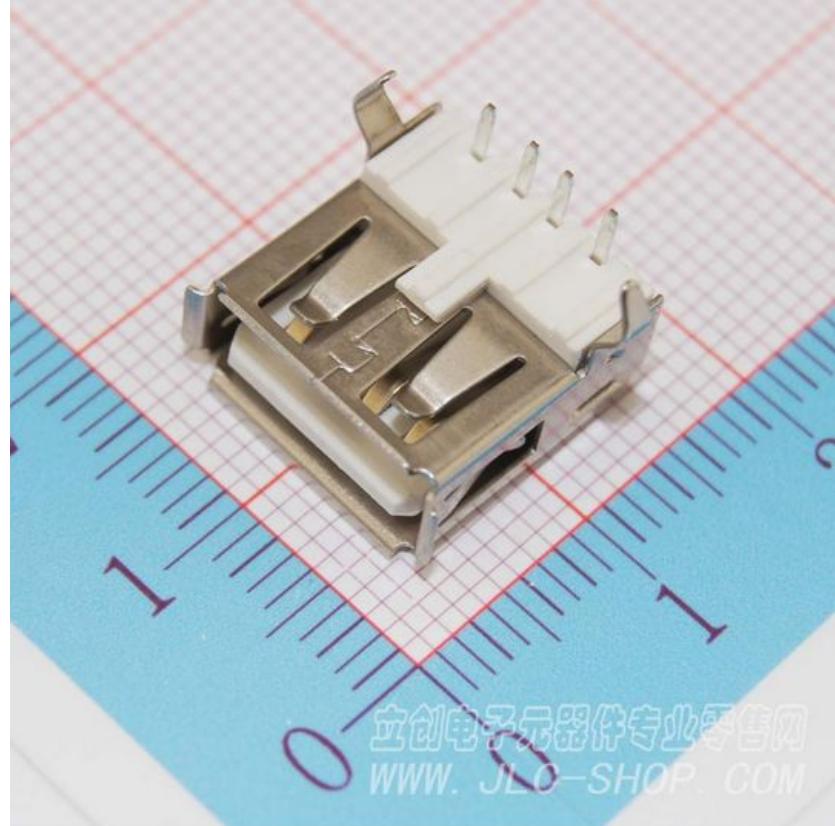

立创电子元器件专业零售网
WWW. JLC-SHOP. COM

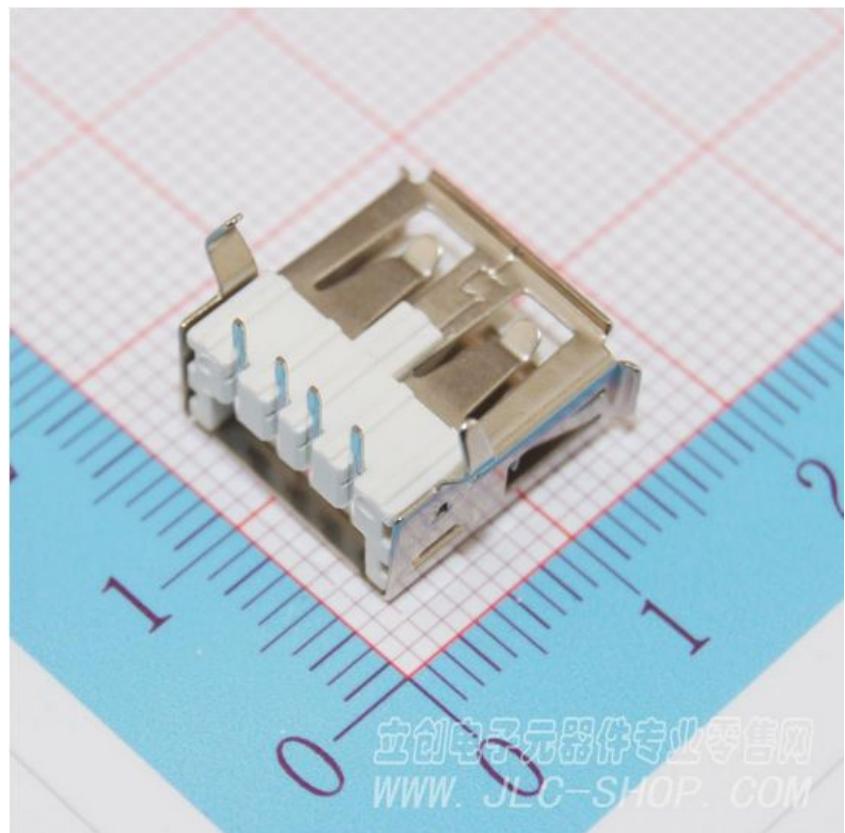

立创电子元器件专业零售网
WWW.JLC-SHOP.COM