





| ▲ | O.P. (MM) | P.T. (MM) |
|---|-----------|-----------|
|   | 15.3±0.5  | 2.0 MAX.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X±0.4  
X.XX±0.25
3. RATING: 15A @125/250VAC UL, CUL APPROVED
- ▲ 4. OPERATING FORCE: 250 ± 50 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MΩ MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 mΩ MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

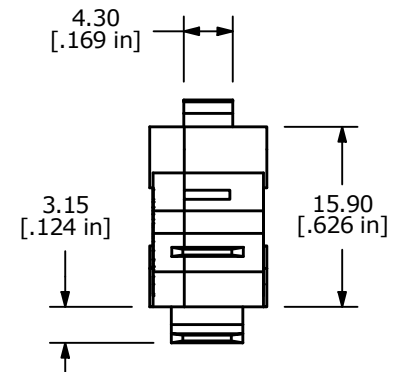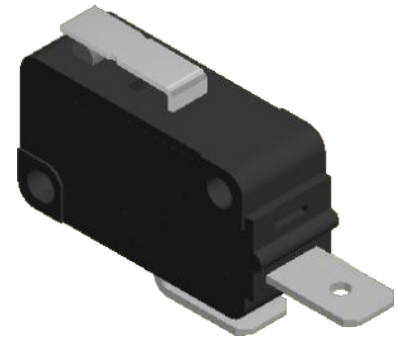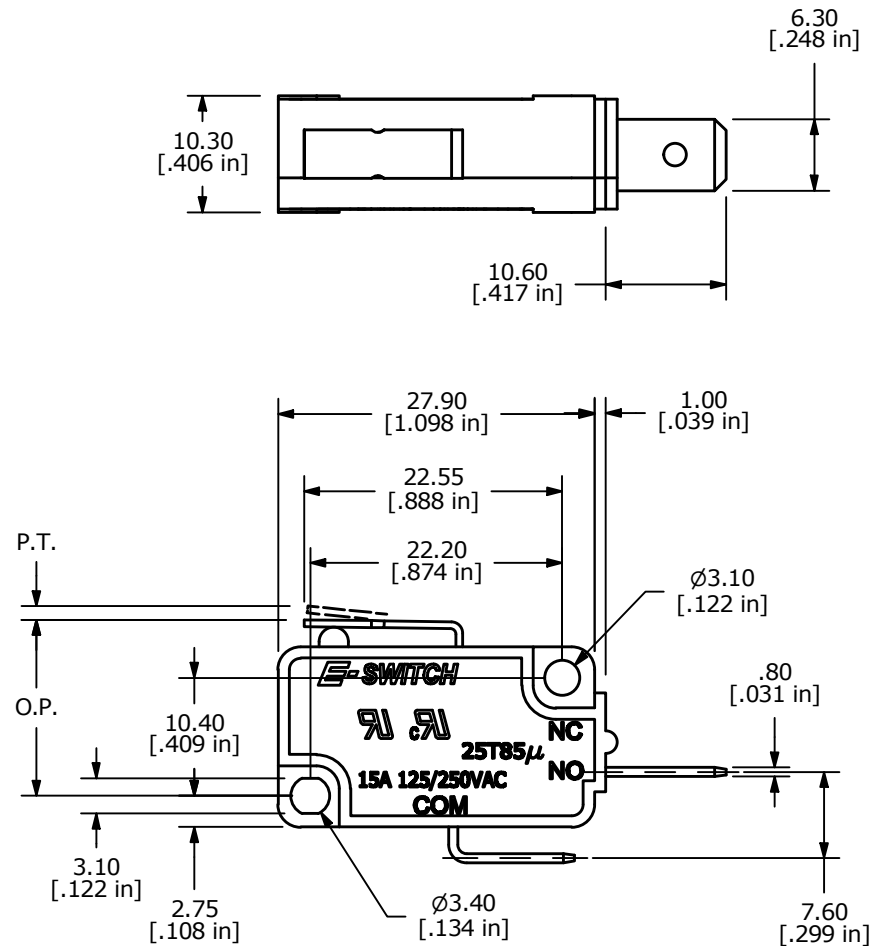

| REV                                                                                                          | ECO NO     | DESCRIPTION                | DATE     | BY | E-SWITCH®              |            |     |         | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|----------------------------|----------|----|------------------------|------------|-----|---------|-----------|
| B                                                                                                            | ECO-100843 | REMOVE VDE RATING AND LOGO | 05/03/22 | JS | TITLE LS0851501F250C2C |            |     |         | 000021094 |
|                                                                                                              |            |                            |          |    | SCALE                  | DATE       | DR  | DWG     | REV       |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                            |          |    | 3:2                    | 12/10/2013 | BLR | Q950110 | B         |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[LS0851501F250C2C](#)