

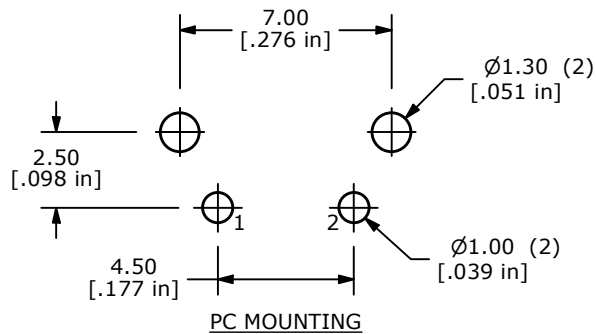
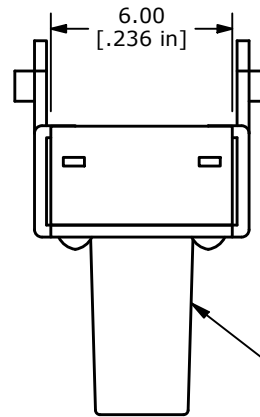
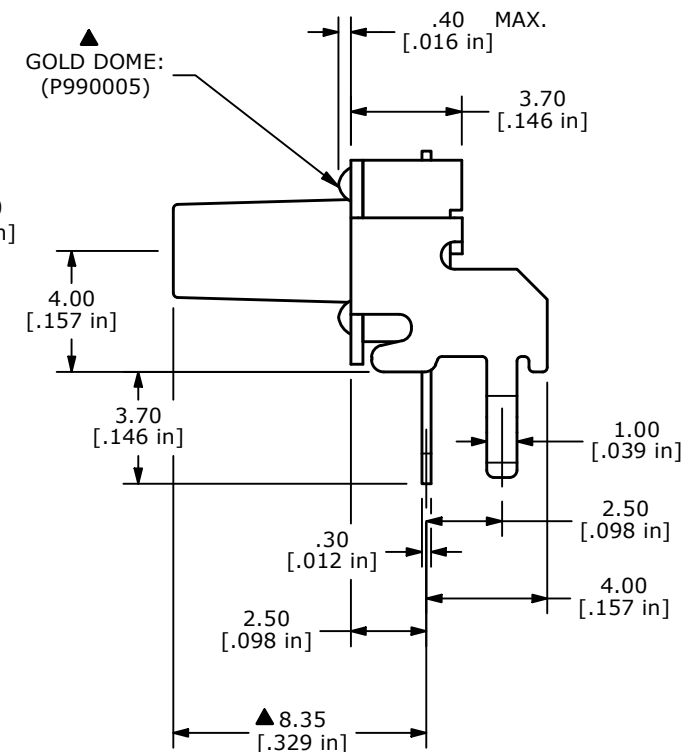


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 $\pm$ 50 gf
6. TRAVEL: 0.25 +0.2/-0.1 mm
7. CONTACT RESISTANCE: 50 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: GOLD
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C TO 85°C

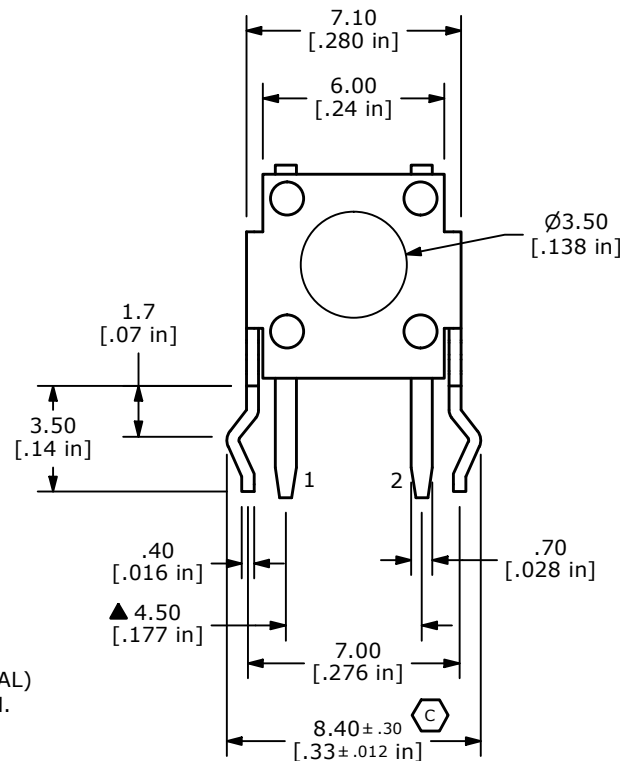

▲ ACTUATOR
COLOR: BLACK

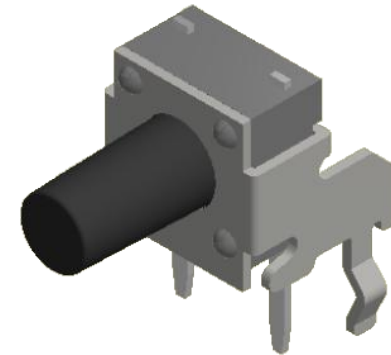

D	24551	REMOVE STEP IN HOUSING, CHANGE TEMP	10/29/20	JM	 E-SWITCH®			
C	19502	ADD TOLERANCE	12/08/10	BGL				
B	16112	ADD GOLD DOME NOTE	6/6/06	CT	TITLE TL1105SF160R			
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE	DATE	DR	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					4:1	12/17/1997	MM	D
							DWG P020302	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[TL1105SF160R](#)