

HSF

NOTES:

Rated Current: 3.0AMP

Contact Resistance: 20mΩ max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ min


Operation Temperature: -25℃ to +85℃



Insulator Material: PA66+30%G.F UL94V-0

Use with: WF2543-T

Mated with: WF2543-Wafer

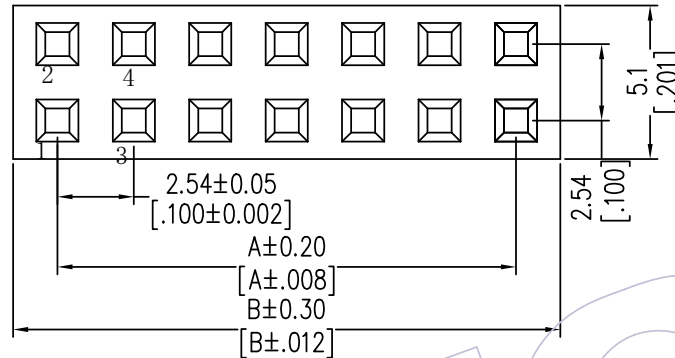

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x01	WF2543-2H01X01	2.54	5.08
2x02	WF2543-2H02X01	5.08	7.62
2x03	WF2543-2H03X01	7.62	10.16
2x04	WF2543-2H04X01	10.16	12.70
2x05	WF2543-2H05X01	12.70	15.24
2x06	WF2543-2H06X01	15.24	17.78
2x07	WF2543-2H07X01	17.78	20.32
2x08	WF2543-2H08X01	20.32	22.86
2x09	WF2543-2H09X01	22.86	25.40
2x10	WF2543-2H10X01	25.40	27.94
2x11	WF2543-2H11X01	27.94	30.48
2x12	WF2543-2H12X01	30.48	33.02
2x13	WF2543-2H13X01	33.02	35.56
2x14	WF2543-2H14X01	35.56	38.10
2x15	WF2543-2H15X01	38.10	40.64
2x16	WF2543-2H16X01	40.64	43.18
2x17	WF2543-2H17X01	43.18	45.72
2x18	WF2543-2H18X01	45.72	48.26
2x19	WF2543-2H19X01	48.26	50.80
2x20	WF2543-2H20X01	50.80	53.34

Ordering Information



WF2543 - 2 H XX X 0 1

No. of Row
Dual Row

No. of pins
01P~20P

Color
W=White
B=Black

Packing
0=PE Bag

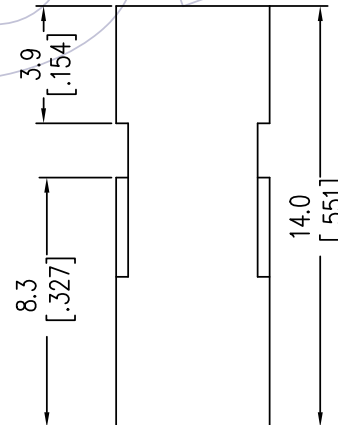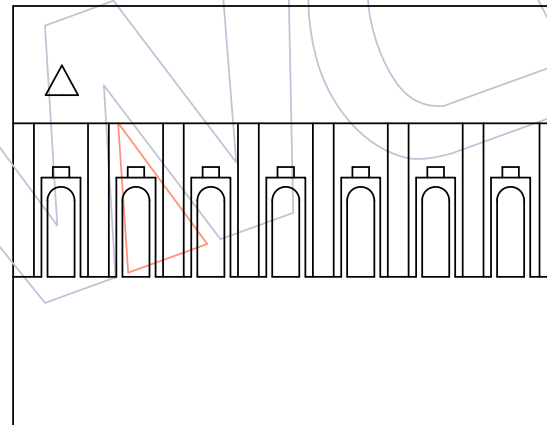

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A2	2019/11/08	MODIFY MATERIAL	—	X.X	±0.40	2019/11/08	UNIT	mm	SEE TAB		
A1	2012/11/19	MODIFY DIM "B"	—	X.XX	±0.25	DATE	SIZE	A4			
AO	2012/09/08	NEW	—	X.XXX	±0.15	DATE	SHEET	1/1			
				Angle	± 3'		PROJ.				
				DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com