
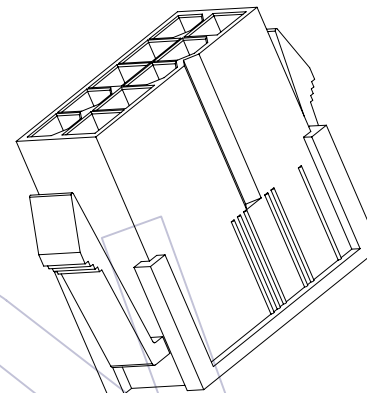


HSF

NOTES:
Rated Current:9.0A
Contact Resistance:20mΩ max
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to+85℃
Insulator Material:PA66
Used with:WF4202-MT(Male Terminal)

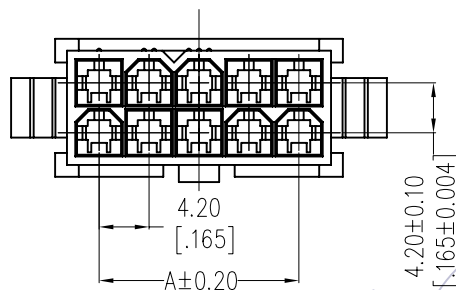

Ordering Information



WF4202 -2 H K XX W 0 1

No.of Row
Dual Row

No.of pins
01P~12P

Color
W=White
B=Black

Packing
0=PE Bag

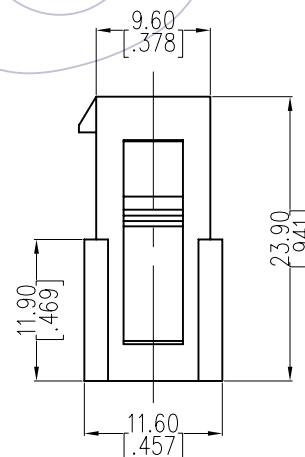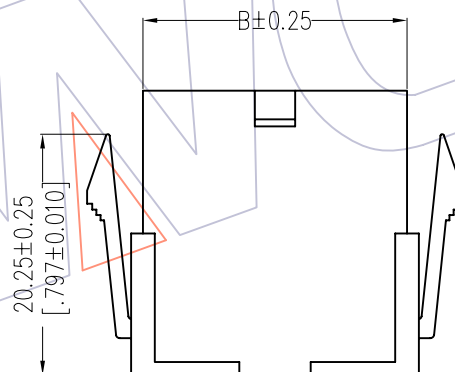

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
2x01	WF 4202-2HK01W01	---	5.40
2x02	WF 4202-2HK02W01	4.20	9.60
2x03	WF 4202-2HK03W01	8.40	13.80
2x04	WF 4202-2HK04W01	12.60	18.00
2x05	WF 4202-2HK05W01	16.80	22.20
2x06	WF 4202-2HK06W01	21.00	26.40
2x07	WF 4202-2HK07W01	25.20	30.60
2x08	WF 4202-2HK08W01	29.40	34.80
2x09	WF 4202-2HK09W01	33.60	39.00
2x10	WF 4202-2HK10W01	37.80	43.20
2x11	WF 4202-2HK11W01	42.00	47.40
2x12	WF 4202-2HK12W01	46.20	51.60

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ± 3°

DIM TOL

DRAW

JYHuang

CHECK

APPROVE

DATE

DATE

DATE

2012/09/17

DATE

DATE

DATE

DATE

SCALE

UNIT

SIZE

SHEET

PROJ.

PROJ.

FIT

mm

inch

A4

1/1

PROJ.

PART NO.

SEE TAB

TITLE:

4.20 HOUSING DUAL ROW

弹片式卡钩

Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

AO 2012/09/17

NEW

REV DATE

MODIFICATION DESCRIPTION

CHANGE