
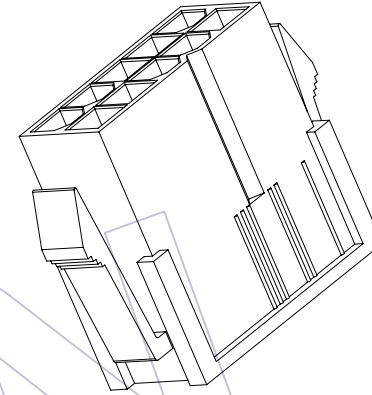


HSF

NOTES:
 Rated Current: 9.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25℃ to +85℃
 Insulator Material: PA66
 Used with: WF4202-MT (Male Terminal)

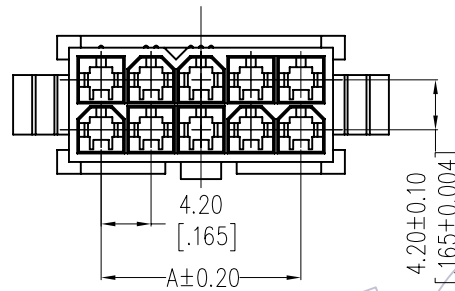

Ordering Information



WF4202 -2 H K XX W 0 1

No. of Row
Dual Row

No. of pins
01P~12P

Color
W=White
B=Black

Packing
0=PE Bag

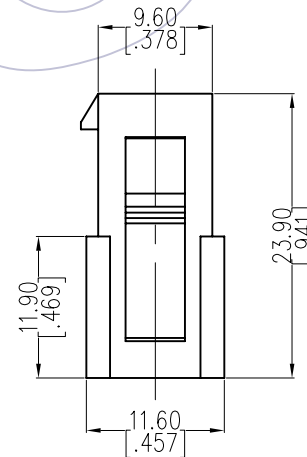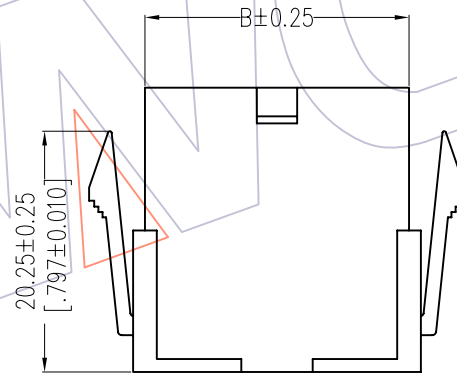

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
2x01	WF4202-2HK01W01	---	5.40
2x02	WF4202-2HK02W01	4.20	9.60
2x03	WF4202-2HK03W01	8.40	13.80
2x04	WF4202-2HK04W01	12.60	18.00
2x05	WF4202-2HK05W01	16.80	22.20
2x06	WF4202-2HK06W01	21.00	26.40
2x07	WF4202-2HK07W01	25.20	30.60
2x08	WF4202-2HK08W01	29.40	34.80
2x09	WF4202-2HK09W01	33.60	39.00
2x10	WF4202-2HK10W01	37.80	43.20
2x11	WF4202-2HK11W01	42.00	47.40
2x12	WF4202-2HK12W01	46.20	51.60

				OPERATION		DRAW JYHuang	DATE 2012/09/17	SCALE	FIT	PART NO. SEE TAB	 Http: www.wcon.com WCON—Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON—Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X	±0.40		CHECK	DATE	UNIT		
				X.XX	±0.25	APPROVE	DATE	SIZE	A4		
AO	2012/09/17	NEW	——	X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	± 3° TOL		DATE	PROJ.		Customer NO.	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/09/17	NEW	