

1

2

3




YAZAKI PART NO.	W ₁	W ₂	ΔR_1	ΔR_2	WIRE SIZE
7116-1180	2.10	3.70	0.30	0.95	AVS 0.2~0.5
Δ (7B16-1180)					EQUIVALENT
7116-1181	3.70	4.20	0.70	1.30	AVS 0.85~1.25
Δ (7B16-1181)					EQUIVALENT

注記


- Δ 1. () 内品番は、A/B回路及び特別管理回路に使用する時に適用すること。

NOTE


- Δ 1. () PART NO. IS USED FOR PARTS ASSOCIATED WITH A/B CIRCUITS OR OTHER SPECIFIED CIRCUIT.

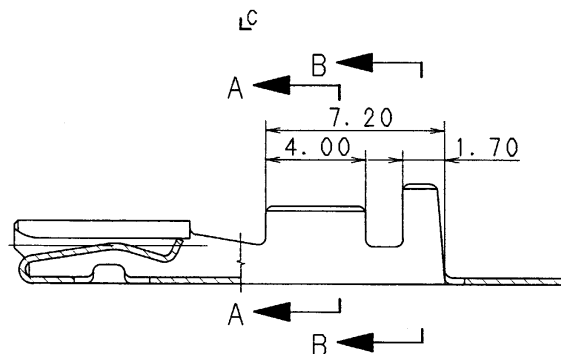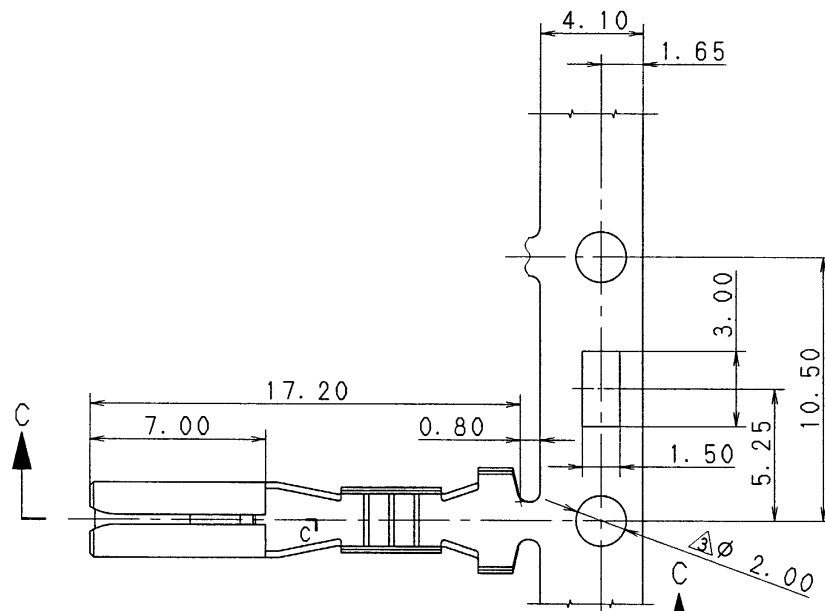

SEC. C-C



SEC. A-A



SEC. B-B

ISSUE MARK

Δ 97.02.19	ADDED A/B PART NO.	C97-L247	H. K	CUSTOMER		MATL.	BRASS (t=0.25)	TREAT.	
Δ 89.02.21	CHANGED NOTE	C89-6278	K. M	CUSTOMER PART NO.	CUSTOMER DWG NO.	SPEC.	(TIN PLATING)	& FIN.	
Δ 86.04.30	CHANGED FORM & RENEW	C86-5493	T. M			NAME	090 TERMINAL FEMALE		
85.02.26	NEW	C85-5204	T. Y	OFFICE	TRIAL PART NO.				
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR				
GENERAL TOLERANCE				VENDOR NO.					
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE
A	± 0.15	± 0.2	± 0.3	± 0.5	± 0.75	$\pm 30'$	0.1	R	NEW
B	± 0.2	± 0.3	± 0.55	± 0.95	± 1.4	$\pm 30'$	0.1	APPROVED	CHECKED
$\odot$	± 0.3	± 0.5	± 0.8	± 1.4	± 2	$\pm 30'$	0.15		CHECKED
SPECIFIED				MASS				DESIGN	DRAWN
								KANEKO	AKIMOTO
								81.07.31	97.02.19
								YAZAKI CORPORATION	

1

2

3