

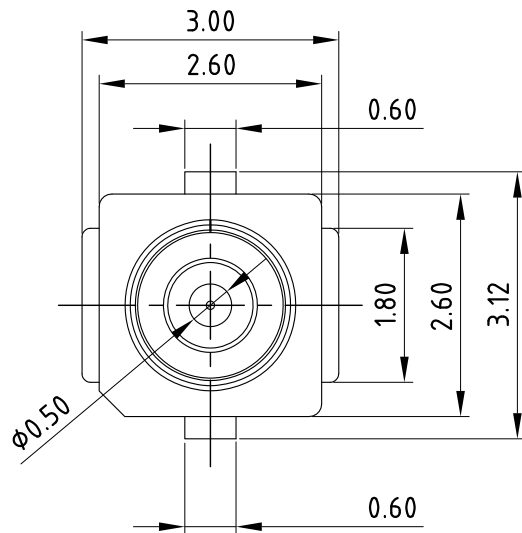


Kinghelm®


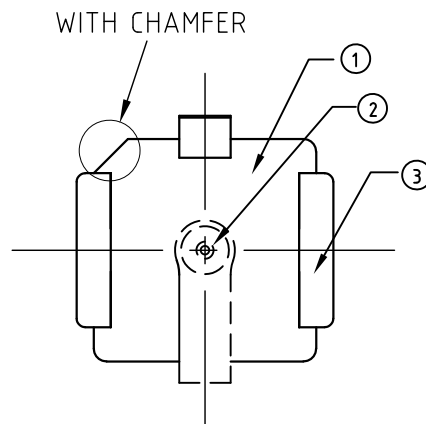


NOTES:

1. FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.4MAX AT 3~6GHZ)
2. CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
3. TEMPERATURE: -40°C TO +90°C;
4. RATED VOLTAGE : 60VAC;
5. CONTACT RESISTANCE :
20mΩ MAX.(SIGNAL CONTACT)
20mΩ MAX.(GROUND CONTACT)
6. WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
7. INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
8. THIS COMPONENT IS HALOGEN FREE.

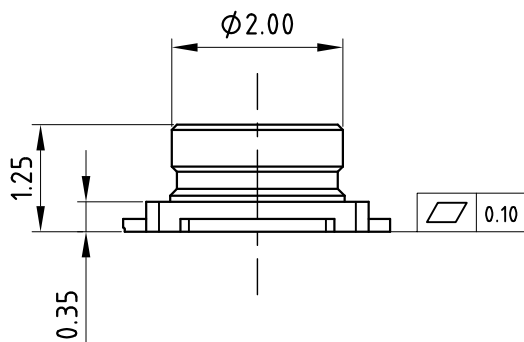

SCHEMATIC

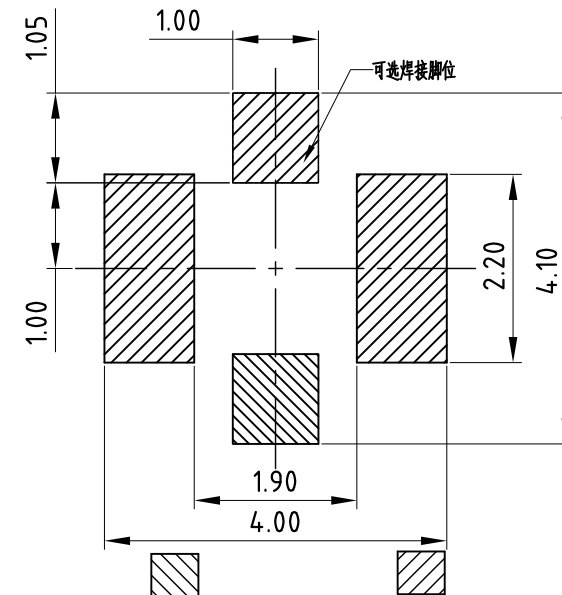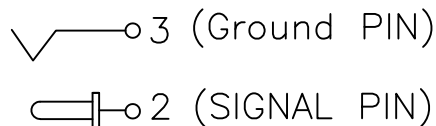

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERANCE ±0.05)

3	GROUND CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
2	CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
1	HOUSING	1	THERMOPLASTIC	UL94V-0
ITEM	NAME	Q'TY	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED			深圳市金航标电子有限公司	
			WWW.BDS666.COM	
			KH-IPEX-K501-29	
X.	±0.25	X.°	±2°	SERIES:
.X	±0.20	.X°	±1°	RF 1G BOARD END
.XX	±0.15	.XX°	±0.5°	TITLE:
			APPD: 王宁 2018/07/09	RF 1G H TYPE BOARD END
			CKD: 段国强 2018/07/09	PART No.:
			DR: 段国强 2018/07/09	
		UNITS	MAT'L	FINISH
		MM	N/A	N/A
		SCALE	SHEET	REV.
		1:1	1/1	A