

FEATURES

- RoHS compliant
- Highly accurate dimensions
- Terminals are highly resistant to external forces
- Highly reliable in environments of sudden temperature change and humidity
- Superior EMI characteristics with ultra low radiation comparing to conventional shielded power inductors
- Operate temperature range -40℃ ~ +125℃ (Including self temp. rise)



APPLICATIONS

- LCD TV
- Monitor
- Ap router
- STB and smart phone
- Touch panel
- DSC
- Game console and other electronic devices



PRODUCT IDENTIFICATION

NR 8040 S 2R2 M T

① ② ③ ④ ⑤ ⑥

- ① Series Name:Wire Wound SMD Power Inductors
- ② Size Code: L*W*T
- ③ Feature Type:Standard
- ④ Initial inductance value: 2R2 = 2.2uH
- ⑤ Inductance Tolerance:M±20%
- ⑥ Packing: Tape & Reel

Shape and Dimensions (Unit:mm)

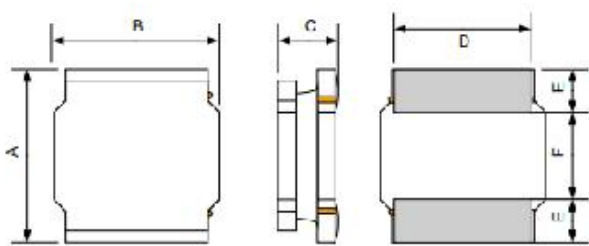

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
NR8040S	8.0±0.3	8.0±0.3	4.2 Max.	6.3±0.3	2.0±0.3	4.0±0.3	3.8	2.2	7.5

Electrical Characteristics List

NO.	Part Number	Inductance	DC Resistance		Isat(A)		Irms(A)		Marking
		100KHz/1.0V	Max.	Typ.	Max.	Typ.	Max.	Typ.	
	Units	(uH)	Ω	Ω	A	A	A	A	
1	NR8040SR47NT	0.47±30%	0.008	0.006	14.00	16.00	8.00	10.00	R47
2	NR8040S1R0NT	1.0±30%	0.010	0.008	9.85	14.00	6.30	6.90	1R0
3	NR8040S1R5NT	1.5±30%	0.013	0.010	8.15	11.00	5.65	6.20	1R5
4	NR8040S1R8NT	1.8±30%	0.013	0.010	8.15	11.00	5.65	6.20	1R8
5	NR8040S2R2MT	2.2±20%	0.016	0.013	7.10	8.00	5.15	5.60	2R2
6	NR8040S3R3MT	3.3±20%	0.022	0.015	6.50	7.00	4.40	4.80	3R3
7	NR8040S4R7MT	4.7±20%	0.025	0.021	5.90	6.50	4.10	4.50	4R7
8	NR8040S5R6MT	5.6±20%	0.027	0.025	6.00	6.50	3.85	4.50	5R6
9	NR8040S6R8MT	6.8±20%	0.034	0.030	4.55	5.20	3.60	4.00	6R8
10	NR8040S8R2MT	8.2±20%	0.039	0.035	4.20	4.80	3.45	3.80	8R2
11	NR8040S100MT	10.0±20%	0.043	0.037	3.60	4.10	3.30	3.60	100
12	NR8040S150MT	15.0±20%	0.065	0.053	2.95	3.40	2.60	2.80	150
13	NR8040S220MT	22.0±20%	0.090	0.081	2.40	2.70	2.10	2.30	220
14	NR8040S330MT	33.0±20%	0.126	0.108	2.05	2.40	1.80	2.00	330
15	NR8040S470MT	47.0±20%	0.200	0.164	1.75	2.00	1.55	1.70	470
16	NR8040S560MT	56.0±20%	0.230	0.205	1.55	1.70	1.45	1.60	560
17	NR8040S680MT	68.0±20%	0.255	0.235	1.45	1.60	1.25	1.40	680
18	NR8040S820MT	82.0±20%	0.293	0.263	1.30	1.40	1.15	1.20	820
19	NR8040S910MT	91.0±20%	0.354	0.296	1.20	1.30	1.05	1.10	910
20	NR8040S101MT	100.0±20%	0.377	0.338	1.15	1.30	1.00	1.10	101
21	NR8040S121MT	120.0±20%	0.434	0.382	1.05	1.10	0.95	1.00	121
22	NR8040S151MT	150.0±20%	0.533	0.475	1.10	1.20	0.85	0.94	151
23	NR8040S221MT	220.0±20%	0.850	0.810	0.85	0.94	0.80	0.88	221
24	NR8040S331MT	330.0±20%	1.156	1.050	0.68	0.75	0.64	0.70	331
25	NR8040S471MT	470.0±20%	2.100	1.750	0.60	0.70	0.50	0.60	471
26	NR8040S681MT	680.0±20%	2.370	2.100	0.52	0.60	0.50	0.65	681
27	NR8040S102MT	1000.0±20%	3.900	3.150	0.40	0.45	0.36	0.42	102

Notes:

※1: All test data is referenced to 20°C ambient;

※2: Rated current: Isat or Irms, whichever is smaller;

※*3: Isat: DC current at which the inductance drops approximate 30% from its value without current;

※*4: Irms: DC current that causes the temperature rise ($\Delta T = 40^{\circ}\text{C}$) from 20°C ambient.


Reliability Test

TEST ITEM	SPECIFICATION	TEST CONDITION
Withstanding voltage test	After test, inductors shall have no evidence of electrical and mechanical damage.	AC voltage of 100v and AC current of 1mA applied between inductor's terminal and core for 3 secs.
Resistance to soldering heat	1. Inductor shall have no evidence of electrical and mechanical damage. 2. Inductance shall not change more than $\pm 5\%$. 3. Q shall not change more than 20%.	a. Temp: 260 ± 5 b. Time: 10 ± 1.0 se
Solderability test	The terminal shall be at least 95% covered with solder.	After fluxing, the terminal shall be dipped in a melted solder bath at $245 \pm 5^\circ\text{C}$ for 4 ± 1.0 secs.
High temperature & high humidity test	The anti-erosion quality of the surface and the specimen's inductance shall not change from the initial value within $\pm 10\%$	a. Test condition 1) Temp.: 85°C , R.H.: 85% 2) Time: 144 ± 2 hours b. Measurement method The experimental component should be put at normal condition for 2 hours then to measure again after test
Salt spray test		a. Test condition 1) Temp.: $35 \pm 2^\circ\text{C}$ 2) Time: 48 ± 2 hours 3) Salt solution PH: 6.5~7.2 b. Measurement method The experimental component should be put at normal condition for 2 hours then to measure again after test
Vibration test	1. Inductance shall be within 10% of the initial value. 2. Appearance: no damage	a. Frequency: 10 to 55 b. Amplitude: 1.5 c. Direction and time X, Y and Z directions for 2 hours each.

TEST ITEM	SPECIFICATION	TEST CONDITION
Free fall test	No mechanical damage shall be noticed.	Drop 5 times on a concrete floor from 1m the height
Temperature Cycling test	1. Inductance shall be within 10% of the initial value 2. Appearance: No damage	a. Test condition 1) Temp.: -55°C , time: 30 ± 3 min 2) Temp.: $+125^{\circ}\text{C}$, time: 30 ± 3 min 3) Cycles times: 12 cycles b. Measurement method The experimental component should be put at normal condition for 2 hours then to measure again after test
High Temperature resistance test		a. Test condition 1) Applied rated current 2) Temp.: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 3) Test time: $1000 \pm 24/-0$ H b. Measurement method The experimental component should be put at normal condition for 24 hours then to measure again after test.
Low temperature resistance test		a. Test condition 1) Temp.: $-55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 2) Test time: $1000 \pm 24/-0$ H b. Measurement method The experimental component should be put at normal condition for 24 hours then to measure again after test.

We have suggested the storage period of lead-free product should not over 6 months.


Structure (The structure of product.)




NO	Components	Material
①	Core	Ni-Zn Ferrite
②	Wire	Polyurethane system enameled copper wire
③	Magnetic Glue	Epoxy resin and magnetic powder
④	Plating	AgNiSn or FeNiCu + Sn Alloy

PACKAGING(unit: mm)

1.包装类型：编带装 2.包装尺寸：
☒ 13" 盘 ☐ 7" 盘

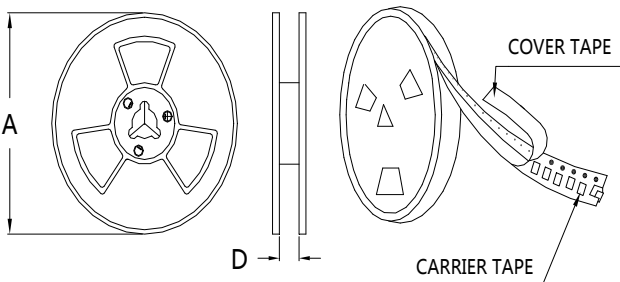

	13" 盘	7" 盘
A	$\Phi 330 \pm 2.0$	$\Phi 178 \pm 2.0$
D	12.5/16.5	

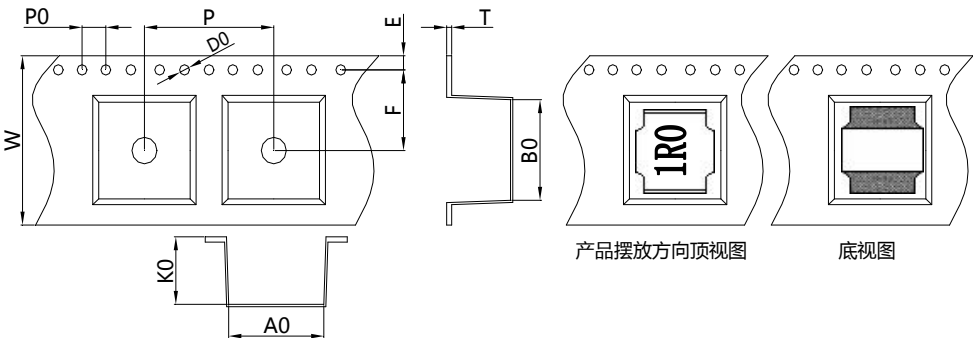

Size	Item	W	A0	B0	K0	P	T	E	F	D0	P0
8040	(mm)	16±0.3	8.4±0.1	8.4±0.1	4.4±0.1	12±0.1	0.4±0.1	1.75±0.1	7.5±0.1	1.5±0.1	4.0±0.1

Packing Quantity:1000pcs/Reel

Re-flowing Profile:

