



Technical specification:

Rated voltage: 250 V
IEC 61076-2-101

Current rating: 4 A at 40°C
IEC 61076-2-101

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +80°C
EN 60512-11-10
-40°C ... +80°C
EN 60512-11-4
UL 2238
-30°C ... +65°C






Mating cycles: >=100
IEC 60512-9a

Materials:

Contact: CuZn, Ni b / Au 0,2 gal.

Contact carrier: PA, UL 94 HB transparent

Sealing: FPM

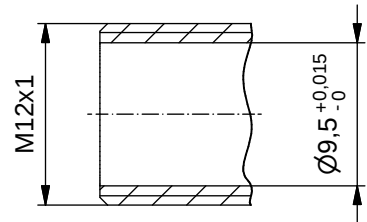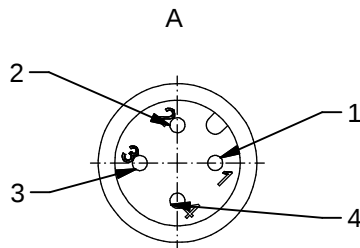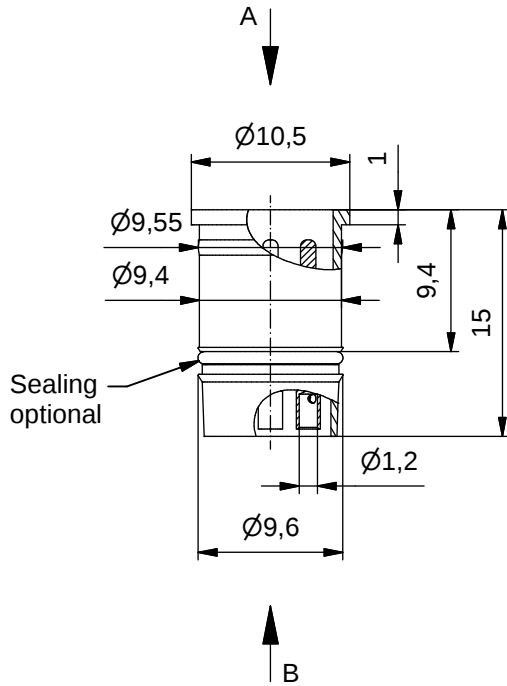

Part no:	Description:	Pos	Construction:
43-01682	SAL - 12 - EST4 - L	4	without sealing
43-01340	SAL - 12 - ESTO4 - L	4	with sealing

DO NOT ALTER CAD DRAWING BY HAND RoHS & REACH compliant	Index: e 11.06.15 fro Ä5678 UL adaptation			dim. in mm		title: Male socket M12x1 with soldering version
			date	name		
			drawn	13.10.08	Fromm	dwg no: 43K1A767
			appd.	27.10.08	Mankopf	
	general tolerance: 0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm ± 1,5°					part no:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

