



DUAL-IN-LINE SOCKETS

SERIES 110...605 • AUTOMATIC INSERTION • OPEN FRAME

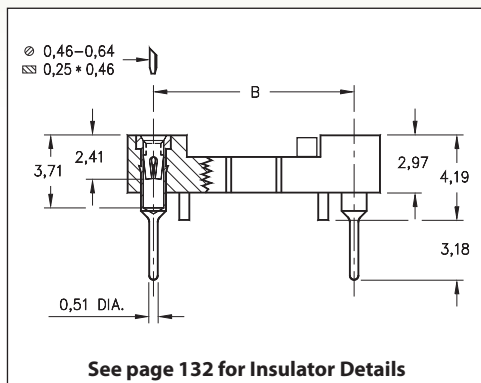

- High temperature thermoplastic insulator with standoffs is compatible with standard automatic insertion equipment and all soldering processes
- Soft copper alloy machined pins allow clinching. Chamfered contact entry allows for ease of IC insertion without bent leads
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 110 uses MM #1005 pins. See page 166 for details
- For Electrical, Mechanical and Environmental Data, see page 264 for details

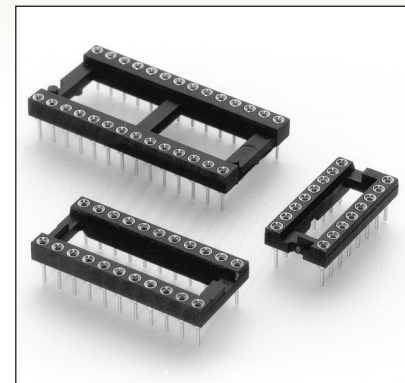

Total number of pins				Quantity per tube
	A	B	C	
6	7,6	7,62	10,1	67
8	10,1	7,62	10,1	50
14	17,7	7,62	10,1	28
16	20,3	7,62	10,1	25
18	22,8	7,62	10,1	22
20	25,3	7,62	10,1	20
24	30,4	7,62	10,1	16
22	27,8	10,16	12,7	18
24	30,4	15,24	17,7	16
28	35,5	15,24	17,7	14
32	40,6	15,24	17,7	12
40	50,8	15,24	17,7	10

ORDERING INFORMATION

110-XX-306-41-605000
 110-XX-308-41-605000
 110-XX-314-41-605000
 110-XX-316-41-605000
 110-XX-318-41-605000
 110-XX-320-41-605000
 110-XX-324-41-605000

 110-XX-422-41-605000

 110-XX-624-41-605000
 110-XX-628-41-605000
 110-XX-632-41-605000
 110-XX-640-41-605000

XX=Plating Code
See Below

RoHS-2
2011/65/EU

SPECIFY PLATING CODE XX =

Sleeve (Pin)



Contact (Clip)



91

93

41

43

5,08µm Sn/Pb

5,08µm Sn/Pb

5,08µm Sn

5,08µm Sn

0,25µm Au

0,76µm Au

0,25µm Au

0,76µm Au



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com