

Article No. : 6SL3230-2YC40-1UPO



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input

Number of phases	3 AC	
Line voltage	200 ... 240 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated voltage	200V IEC	240V NEC
Rated current (LO)	172.00 A	172.00 A
Rated current (HO)	149.00 A	149.00 A

Output

Number of phases	3 AC	
Rated voltage	200V IEC	240V NEC¹⁾
Rated power (LO)	55.00 kW	75.00 hp
Rated power (HO)	45.00 kW	60.00 hp
Rated current (LO)	192.00 A	192.00 A
Rated current (HO)	154.00 A	154.00 A
Rated current (IN)	197.00 A	
Max. output current	260.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)		
110% base load current IL for 60 s in a 300 s cycle time		
High Overload (HO)		
150% x base load current IH for 60 s within a 600 s cycle time		

General tech. specifications		
Power factor λ	0.90 ... 0.95	
Offset factor $\cos \phi$	0.99	
Efficiency η	0.96	
Sound pressure level (1m)	72 dB	
Power loss ³⁾	2.430 kW	
Filter class (integrated)	Unfiltered	
EMC category (with accessories)	without	
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7-1500F)	

Communication

Communication PROFIBUS DP


Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0
Analog / digital inputs	
Number	2 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0 → 1	4 V
1 → 0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$	

Closed-loop control techniques	
V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Article No. : 6SL3230-2YC40-1UPO

Ambient conditions		Mechanical data	
Standard board coating type	Class 3C3, according to IEC 60721-3-3: 2002	Degree of protection	IP20 / UL open type
Cooling	Air cooling using an integrated fan	Frame size	FSF
Cooling air requirement	0.153 m ³ /s (5.403 ft ³ /s)	Net weight	26.7 kg (58.86 lb)
Installation altitude	1,000 m (3,280.84 ft)	Dimensions	
Ambient temperature		Width	305 mm (12.01 in)
Operation	-20 ... 45 °C (-4 ... 113 °F)	Height	709 mm (27.91 in)
Transport	-40 ... 70 °C (-40 ... 158 °F)	Depth	369 mm (14.53 in)
Storage	-25 ... 55 °C (-13 ... 131 °F)	Standards	
Relative humidity		Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible	CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
Connections			
Signal cable			
Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)	Converter losses to IEC61800-9-2*	
Line side			
Version	M10 screw	Efficiency class	IE2
Conductor cross-section	35.00 ... 2 x 120.00 mm ² (AWG 1 ... AWG 2 x 4/0)	Comparison with the reference converter (90% / 100%)	65.0 %
Motor end			
Version	M10 screw		
Conductor cross-section	35.00 ... 2 x 120.00 mm ² (AWG 1 ... AWG 2 x 4/0)		
DC link (for braking resistor)			
PE connection	M10 screw		
Max. motor cable length			
Shielded	300 m (984.25 ft)		
Unshielded	450 m (1,476.38 ft)		

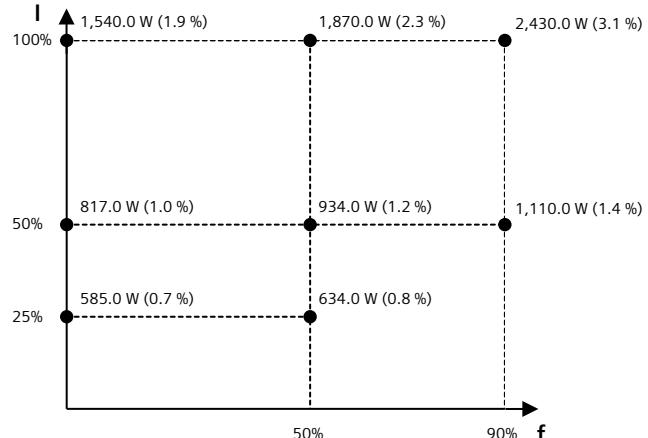

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

¹⁾The output current and HP ratings are valid for the voltage range 220V-240V

²⁾Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

Article No. : 6SL3230-2YC40-1UP0

Operator panel: Basic Operator Panel (BOP-2)

Screen	Ambient conditions
Display design	LCD, monochrome
Mechanical data	
Degree of protection	IP55 / UL type 12
Net weight	0.140 kg (0.31 lb)
Dimensions	
Width	70.00 mm (2.76 in)
Height	106.85 mm (4.21 in)
Depth	19.60 mm (0.77 in)
Ambient temperature	
Operation	0 ... 50 °C (32 ... 122 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Relative humidity at 25°C during	
Max. operation	95 %
Approvals	
Certificate of suitability	CE, cULus, EAC, KCC, RCM

Article No. : 6SL3230-2YC40-1UPO

I/O Extension Module	
Inputs / outputs	Mechanical data
Digital inputs	Dimensions
Number of digital inputs ¹⁾ 2	Width 71 mm (2.80 in)
Conductor cross-section 0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm ²	Height 117 mm (4.61 in)
Input voltage (0→1) 11 V	Depth 27 mm (1.06 in)
Input voltage (1→0) 5 V	
Input voltage, max. 30 V	
Digital outputs	
Number of digital outputs 4	
Conductor cross-section 1.5 mm ² (AWG 16)	
Output current ²⁾ 2 A	
Analog inputs	
Number of analog inputs ³⁾ 2	
Conductor cross-section 0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) alternatively 2*0.5 mm ²	
Current 0 ... 20 mA	
Analog outputs	
Number of analog outputs 2	
Type of analog outputs ⁴⁾ Non-isolated output	
Conductor cross-section 0.5 ... 1.5 mm ² (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm ²	
Output voltage 0 ... 10 V	
Output current 0 ... 20 mA	

¹⁾DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

²⁾The max. current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

³⁾2 analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.

⁴⁾Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

[6SL32302YC401UP0](#)