

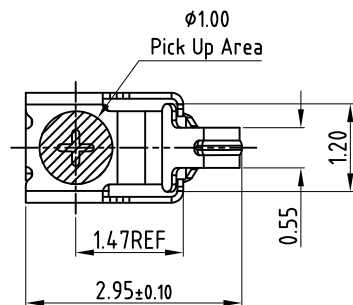
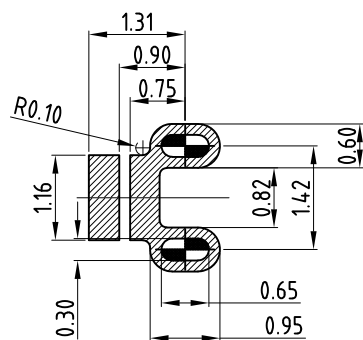
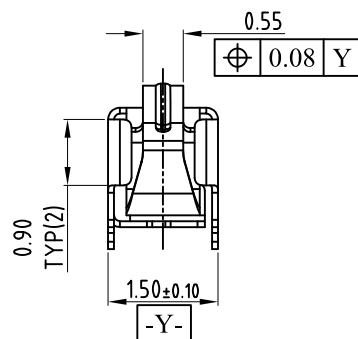



3D View

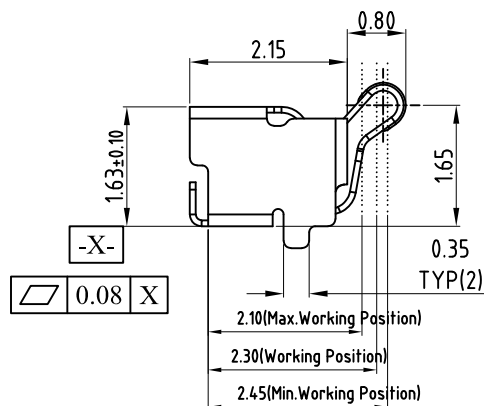

METAL MASK T=0.08
TOLERANCE: $\pm 0.05\text{MM}$
(FOR REFERENCE ONLY)

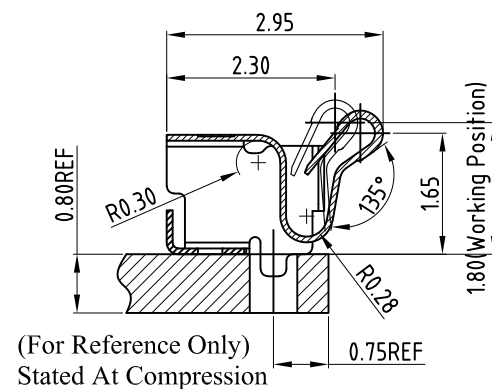

(For Reference Only)
Stated At Compression

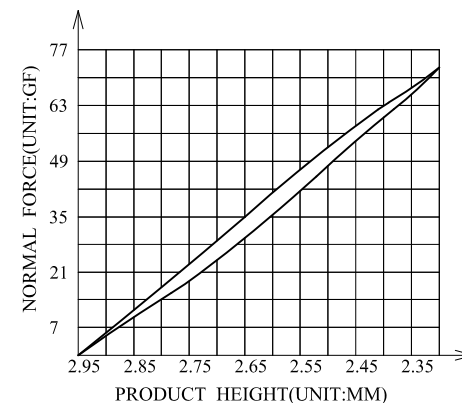

NOTES:

- 1:MATERIAL
1-1: SUS-301 THICKNE=0.08MM
- 2:SPECIFICATIONS
2-1: RATED CURRENT: 1.0A
2-2: VOLTAGE RATING: 1.5V
2-3: CONTACT RESISTANCE: 80m Ω /MAX
2-4: WELDING THRUST: $\geq 3\text{KG}$
2-5: OPERATING TEMPERATURE: -40 $^{\circ}\text{C}$ ~+85 $^{\circ}\text{C}$
- 3:DURABILITY: 1500 CYCLES
- 4:SALT SPRAY TIME: 24H
- 5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN
- 6:REQUIREMENTS
6-1: TERMINAL TO EAT FULL TIN, NOT PEELING, WELDING OBVIOUS COLOR AND OTHER ADVERSE
6-2: ROHS, REACH, HF HALOGER ADVERSE OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L2.95*W1.5*H1.65	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW-TXT29515165A	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-24060061714	SHEET NO. 1 OF 1