

RoHS

MAPX

MODIFICATION

DRW

DATE

SPECIFICATIONS:




1. ELECTRICAL CHARACTERISTICS:

- 1-1. CONTACT RESISTANCE: 30m MAX. Ω
1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
1-3. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC


2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE :0.5-2.0kgf(REF.)
2-2. WITHDRAWAL FORCE :0.8-2.0kgf(REF.)

3. LIFE TEST: 10,000 CYCLES.

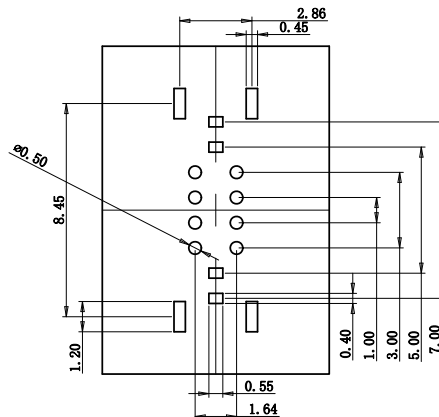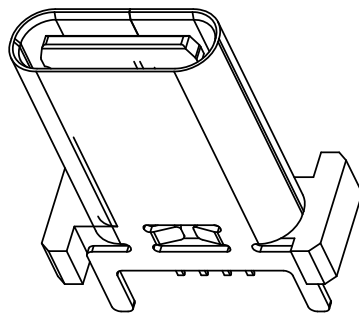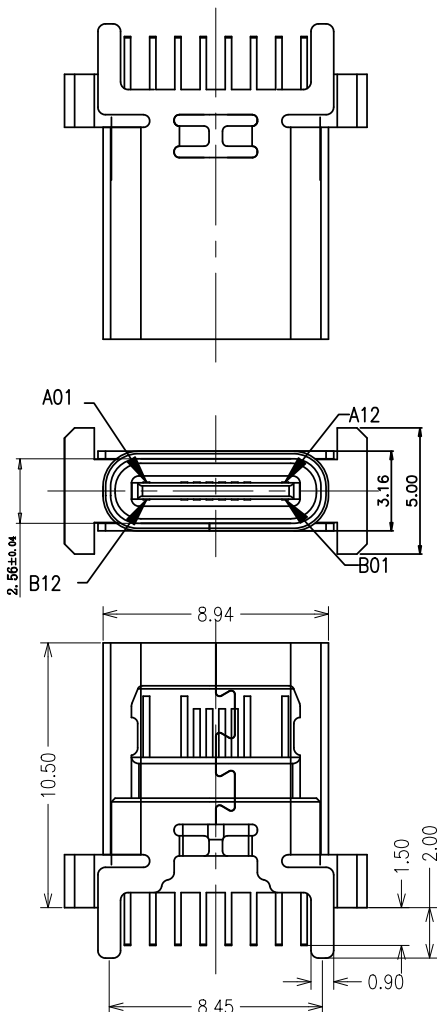

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



A1	Q10	B12	Q10
A4	Y105	B9	Y105
A5	C21	B8	SR02
A6	DP1	B7	SR02
A7	SR01	B6	DP2
A8	SR01	B5	C21
A9	Y105	B4	Y105
A12	Q10	B1	Q10
FIN	SIGNAL NAME	FIN	SIGNAL NAME

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.35	X.	$\pm 5^\circ$
.X	± 0.25	.X	$\pm 2^\circ$
.XX	± 0.20	.XX	$\pm 1^\circ$
.XXX	± 0.05	.XXX	$\pm 0.5^\circ$

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	L-S-S	制图料号 PRODUCT PART NO.	918-648K2027Y30010
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NAME	TYPE-C3.1母座10.5立插无弹无柱 四脚插板间距8.45LCP黑胶16PIN
日期 DATE	2021-03-10	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0