
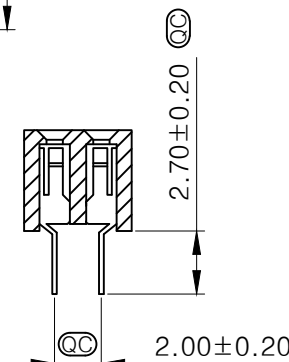


4.50±0.20

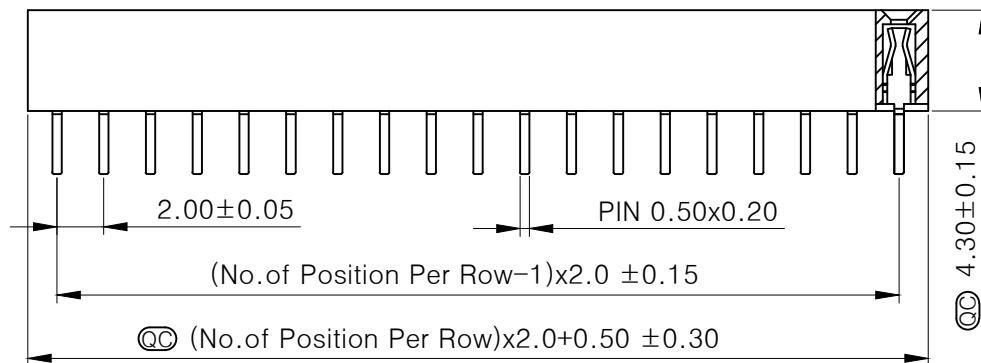


SPECIFICATIONS

Current Rating: 2 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Insulator Material: Polyester(UL94V-0) See Part Number
Contact Material: Brass or Phosphor bronze
Contact Plating: Au or Sn over 50u" Ni
Operation Temperature: -40℃ to +105℃
ⓄⓄ Important Dimensions

Part Number:

Pitch: 2 2 4 2 NN 1 X X 0 X 0
2-2.00mm
Height of Insulator: 4-4.30mm
Number of row: 2-Double row
Pin number of each row: 01 ~40PIN
Type of terminations: 1-Straight Solder
Insulator Material: 2-LCP 5-PA6T 4-PA46 9-PA9T
Packaging Options: 1-Tube Packaging 3-Pallet Packaging
Plating Code: 0-Tin over nickel 1-Gold flash over nickel 3-0.075um gold over nickel 5-0.125um gold over nickel 6-0.25um gold over nickel 7-0.375um gold over nickel 8-0.75um gold over nickel

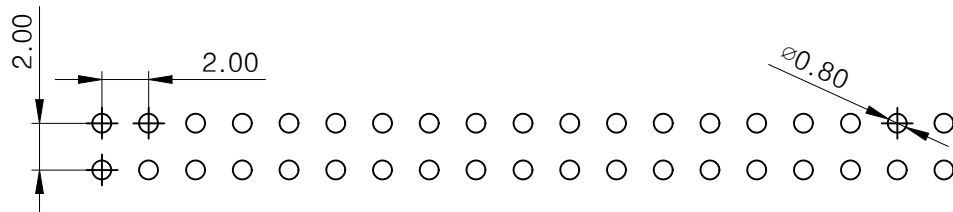

RECOMMENDED PCB LAYOUT
COMPONENT SIDE VIEW



E			Units	mm	Scale	3:1	Drawing By	Date	Leyconn LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522			
D			Tolerance Unless Otherwise Specified				Loek-Wu	2014/10/20				
C			.X ~ ±0.30				Reviwed By	Date	Sheet	1 of 1	Title	2.00mm Female Header
B			.XX ~ ±0.25				Kirby-Xiao	2014/10/20	H=4.3mm DIP Type			
A	RELEASED	20/10/14	.XXX ~ ±0.20				Approval By	Date	Third Angle Projection		Part No.	2242NN1XX0X0
REV	DESCRIPTION.	Date	Angle ~ ± 3°				Luli-Liu	2014/10/20				REV A