



[Http://www.krhero.com](http://www.krhero.com)

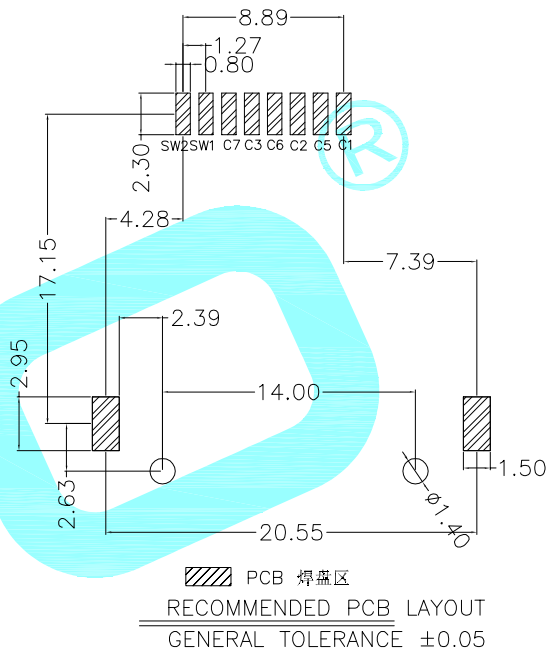

- 1.Current rating: 0.5 A
- 2.Voltage rating: 5V AC/DC
- 3.Dielectric strength:500V AC RMS for 1 minute.
- 4.Contact resistance:100mΩ max.
- 5.Insulator resistance:500MΩ min.at 250V DC.
- 6.Mating unmating cycles:5000 cycles

PIN NO.	PIN NAME
C1	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (CLK)
C5	Ground
C6	Programming Voltage Vpp
C7	I/O

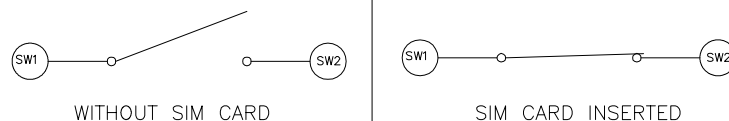

③	Shell	——	1	SUS	Ni/Au Plated	——
②	Terminal	——	6	Copper alloy	Ni/Au Plated	——
①	Housing	——	1	LCP	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 hro®		
DRAWN		LIUCAN	2023.3.16			
CHECKED				TITLE:	SIM	
APPROVALS				PART NO.	SIM-15A	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.25			
		5~10	±0.20			
		~ 5	±0.15	±2'	DRAWING NO.	
						PROJ: 
						SHEET 1 OF