



RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05MM  
(FOR REFERENCE ONLY)



METAL MASK T=0.08

TOLERANCE: ±0.05MM  
(FOR REFERENCE ONLY)

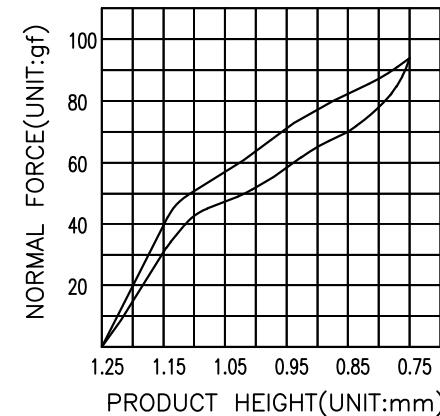

NOTES:

1: MATERIAL

1-1: SUS-301 THICKNESS=0.10MM

2: SPECIFICATIONS

2-1: CONTACT RESISTANCE: 80mΩ/MAX

2-2: RATED CURRENT: 1.0A

2-3: VOLTAGE RATING: 1.5V

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

3: DURABILITY: 1500 CYCLES

4: SALT SPRAY TIME: 24H

5: ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50μ" MIN

6: REQUIREMENTS

6-1: TERMINAL TO EAT FULL TIN, NOT PEELING,  
WELDING OBVIOUS COLOR AND OTHER ADVERSE

6-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC  
AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X. ±2° X.XX ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣 DATE : 2014-02-23	PART NAME: 天线弹片 L2. 90*W1. 0*H1. 25
CHECKED BY: 马跃 DATE : 2014-02-23	PART NO. HYCW-TXT2910125A	MOLD NO.
APPROVED BY: 邱敏 DATE : 2014-02-23	DRAW NO.: HYC-24060061451	SHEET NO. 1 OF 1