
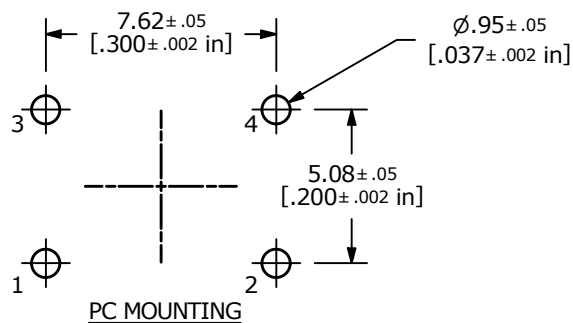
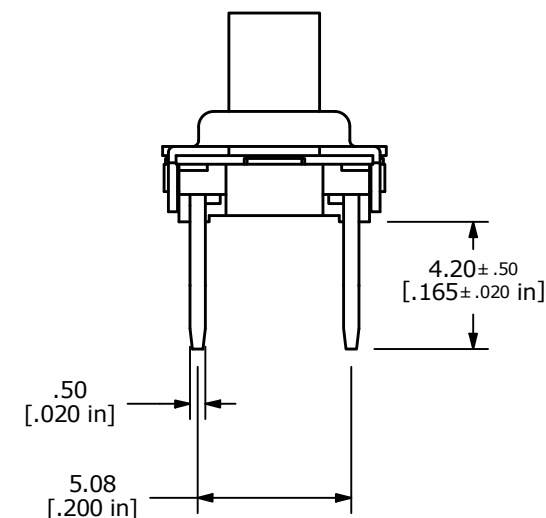
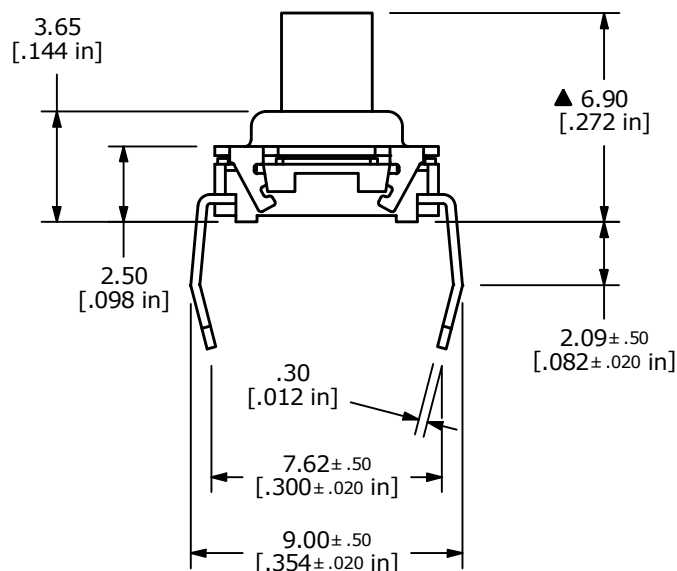
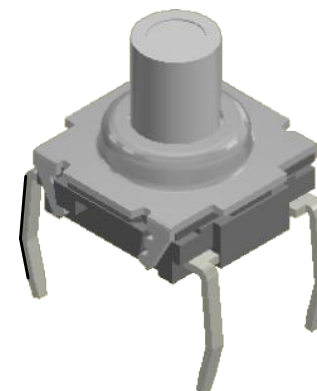


▲ CIRCUIT: SPST

## NOTES

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 500 ± 100gf
5. OPERATING LIFE: 200,000 CYCLES
6. TRAVEL: 0.5 ± 0.15mm
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: 100m Ω MAX
9. INSULATION RESISTANCE: 100M Ω MIN @ 100VDC.
- ▲ 10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40°C TO 85°C
12. PACKAGING: TUBE 60 PCS. PER
13. ▲ DENOTES CRITICAL PARAMETER

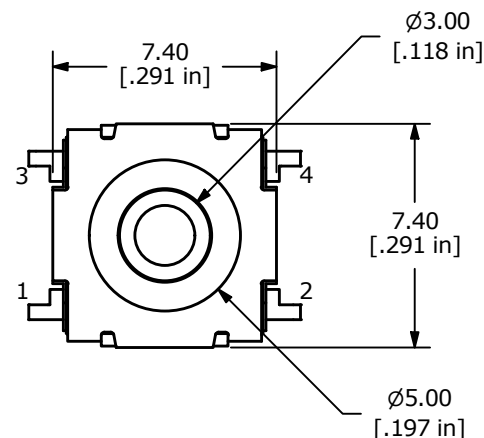

| REV | ECO NO     | DESCRIPTION | DATE     | BY | E-SWITCH®           |           |    |         | OBJECT ID |
|-----|------------|-------------|----------|----|---------------------|-----------|----|---------|-----------|
| A   | ECO-101147 | NEW RELEASE | 08/01/22 | JS | TITLE TL6100CF500QP |           |    |         | 100122453 |
|     |            |             |          |    | SCALE               | DATE      | DR | DWG     | REV       |
|     |            |             |          |    | 4:1                 | 7/27/2022 | JS | T350023 | A         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED