


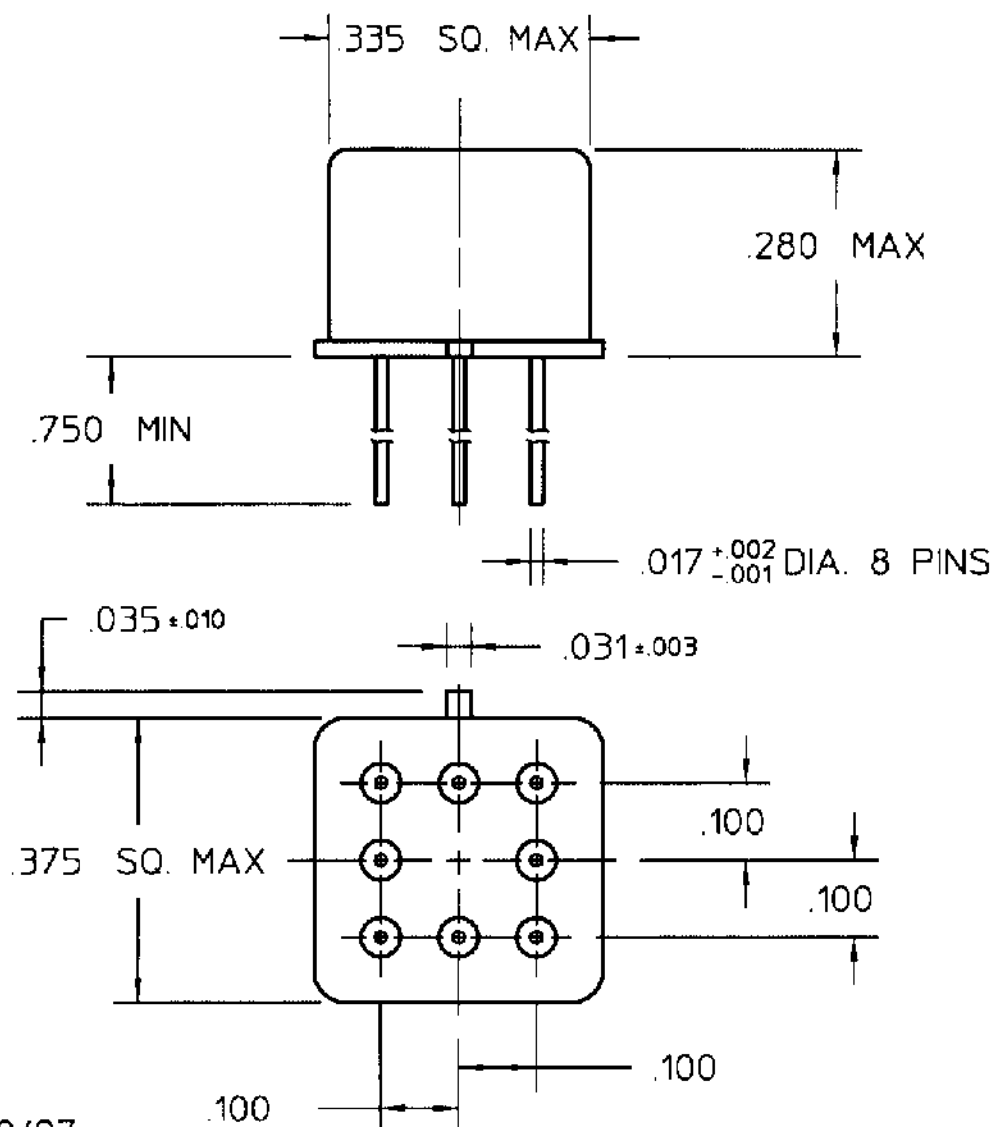

REV. 1 11/20/97

COIL:

RESISTANCE 64 OHMS $\pm 10\%$

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 3.8 VDC

MUST RELEASE

ENVIRONMENT:

VIBRATION 10 CPS TO 500 CPS @ 10 g's


SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 4.0 MS MAX

RELEASE TIME 6.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 2/20/92 ☒ Rev #1/2/97



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.

CUST. NO.

TYPE "HCD" RELAY

HCD-5B