


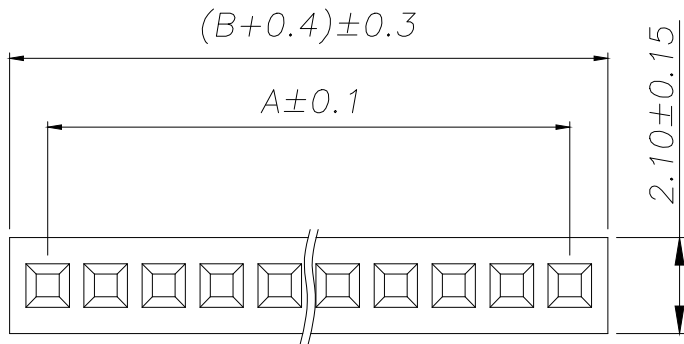


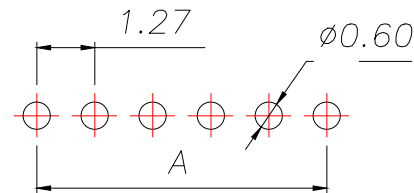

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

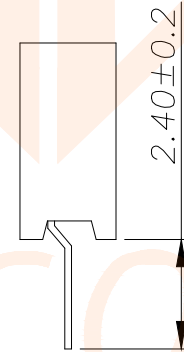

SPECIFICATIONS
Current Rating: 1.0 Amps
Withstanding Voltage:AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature:-40°to+105°
Insrlator Material:Polyester(UL94V-0)
Contact Material:Phosphor bronze
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp:
240°C for30-60seconds
(260°C for5seconds)

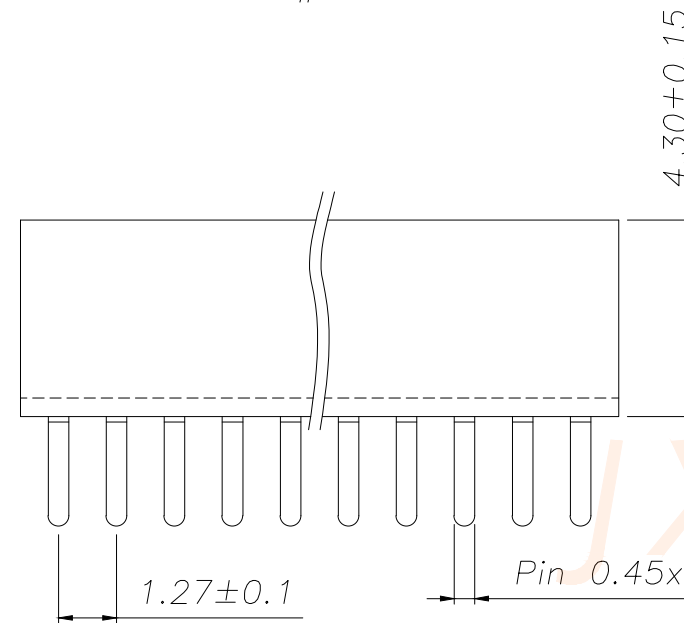

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
B127N01-0B1P51-H43C24	1	0.00	1.27
B127N01-0B2P51-H43C24	2	1.27	2.54
B127N01-0B3P51-H43C24	3	2.54	3.81
B127N01-0B4P51-H43C24	4	3.81	5.08
B127N01-0B5P51-H43C24	5	5.08	6.35
B127N01-0B6P51-H43C24	6	6.35	7.62
B127N01-0B7P51-H43C24	7	7.62	8.89
B127N01-0B8P51-H43C24	8	8.89	10.16
B127N01-0B9P51-H43C24	9	10.16	11.43
.....			
B127N01-0B50P51-H43C24	50	(50-1)x1.27	(50)x1.27

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd		
X.X ±0.30	X.* ±5°	PART NO. B127N01-0BXP51-H43C24	TITLE:1.27FH H4.3 1xNPin 180度 W2.1 U型 PC2.4 6T	
.XX ±0.20	X.X* ±1°			
.XXX ±0.10	X.XX* ±0.5°			
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG	
MATERILA	— — —	CHED: Olvia		
FINISH	— — —	APPD: Ava		SCALE N:A
				SHEET 1/1