
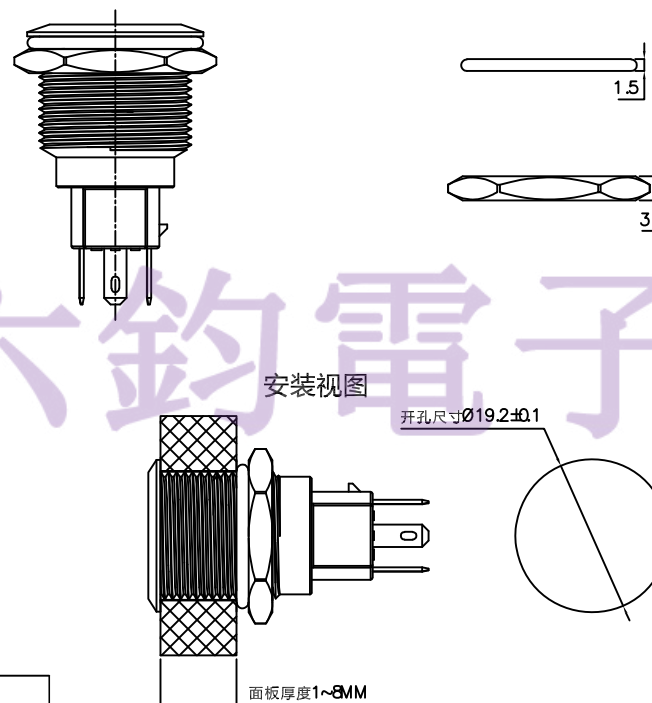
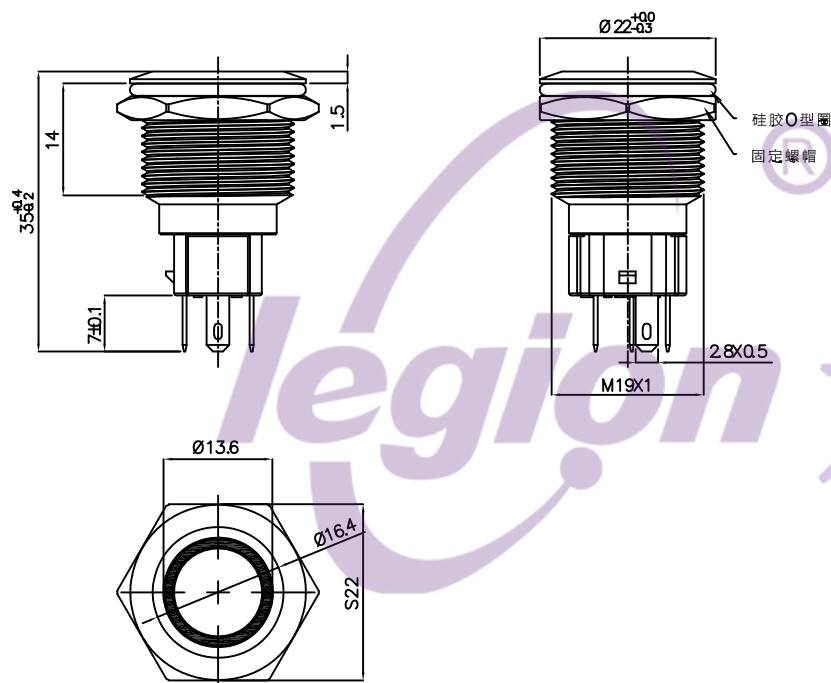
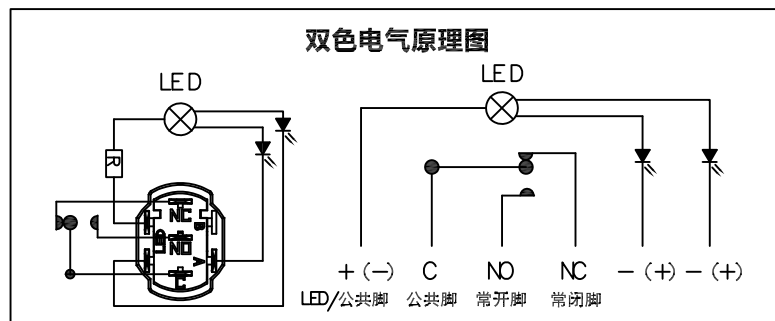




TEL:0769-82310511-867

发热电流: U_t AC250V, I_{th} 5A;
额定电流: 3A DC36V;
工作环境温度: $-20^{\circ}\text{C}\sim+55^{\circ}\text{C}$;
按压行程: $2.8\text{mm}\pm 0.1$;
接触行程: $1.5\text{mm}\pm 0.1$;
按压扭力: $\leq 3.5\text{N}$;
NO脚反推扭力: $\leq 30\text{N}$;
螺帽装配力矩: $5\sim 14\text{N}\cdot\text{m}$;
防护等级: IP67;
防暴等级: IK09;
LED 灯寿命: 40000h;
LED 灯功耗: 约20mA以下;
接触电阻: $\leq 50\text{m}\Omega$;
绝缘电阻: $\geq 1000\text{M}\Omega$;
电气寿命: 50000次以上;
机械寿命: 500000次以上;
工频耐压: 2000V 1min;

10	C/NO/NC TERMINAL	BRASS	1	Ag-PLATED	面版厚度1~3MM		电气寿命: 50000次以上; 机械寿命: 500000次以上; 工频耐压: 2000V1min;							
9	LED TERMINAL	BRASS	1	Ag-PLATED										
8	TERMINAL	SILVER ALLOY	1		TOLERANCE UNLESS SPECIFIED									
7	C/NO/NC BASE	PA46	1											
6	LED BASE	PBT	1		< 1.5: ±0.1mm > 1.5~5.0:±0.25mm > 5.0:±0.3mm		ANGULAR ±1°	1						
5	NUT	BRASS	1	Ni-PLATED				NO	DATE	REVISIONS		BY	APPD	
4	WASHER	RUBBER	1	WHITE	TITLE: PUSH SWITCH				UNIT : MM	ROHS	DWN			
3	COVER	SUS/BRASS/CR/ALUMINIUM ALLOY	1	(SUS/BRASS)Ni-PLATED CR/ALUMINUM 氧化本色	MODEL:HY-19-P11-N-E-GR12V-CU-008				SCALE: 1:1	COMPLIANT	CHK'D			
2	BUTTON	SUS	1		东莞市六钧电子五金有有限公司							APPD		
1	发光区域	PC	1									PRO.AGL:  	REV :A0	
NO.	PART NAME	MATERIAL	QTY	FINISHING										