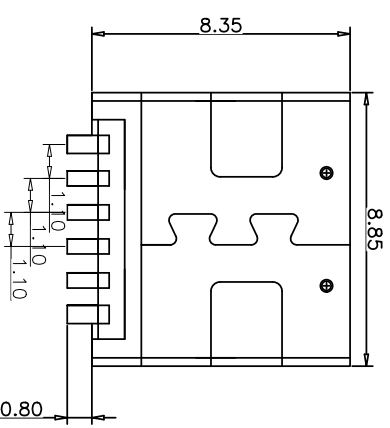

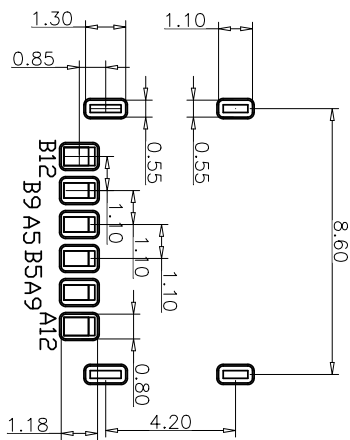


备注 (NOTE):

1材质:

- 1.1胶芯: LCP UL94 V-0
- 1.2端子: C2680, T=0.2mm; 镍底, 镀金
- 1.3外壳: 不锈钢201-H 表面镀镍

2.电气特性:

- 2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
- 2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
- 2.3. 额定电压: 5V.
- 2.4. 耐电电压: 100VAC.
- 2.5. 绝缘电阻: 至少100兆欧.

3.机械性能:

- 3.1. 插入力: 0.5-2.0Kg
- 3.2. 拔出力: 0.6-2.04Kg
- 3.3. 插拔次数: 5000次.

4.工作环境: -20℃ to +85℃.

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

产品图									
PRODUCT CHART DIMS									
公差—一览表									
TOLERANCE UNLESS OTHERWISE									
X.	±0.35		X.	±5.*					
X.	±0.25		X.	±2.*					
.XX	±0.20		.XX	±1.*					
.XXX	±0.05		.XXX	±0.5*					
深圳市精拓金电子有限公司 Shenzhen Jingtuo Jin Electronics Co., Ltd.									
单位	MM		制图	L-S-S		产品料号			
比例	1:1		审核	G-Z-F		产品名称			
SCALE			CHNO			PRODUCT NO.			
日期	2021-03-10		核准	黄国荣		角法			
DATE			APPD			VIEW			
								版本	A0
								VER	