

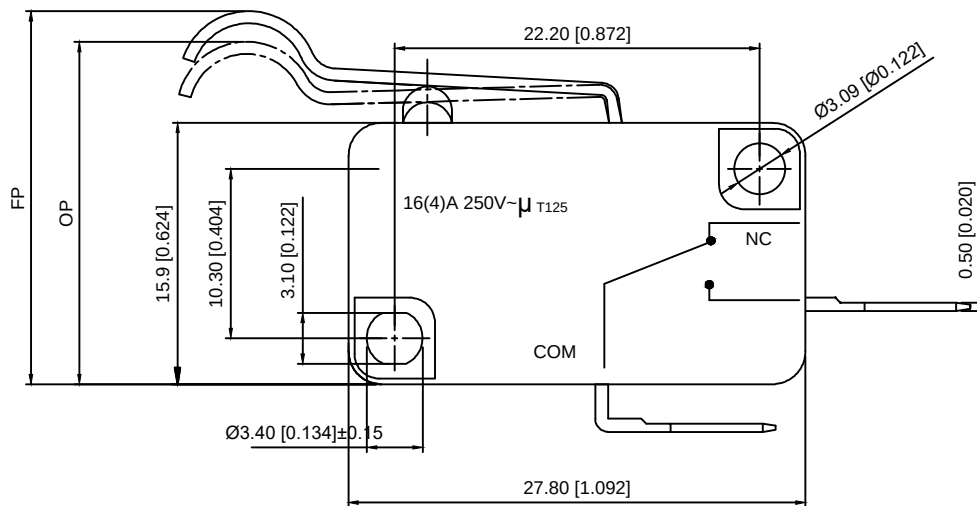


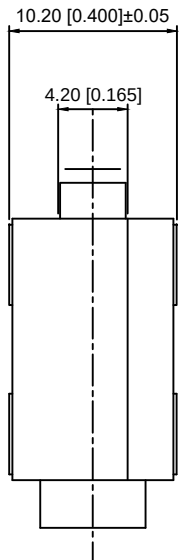


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 16A AC / DC
- Withstanding voltage: 1500V AC/minute
- Insulation resistance: 100MΩ Min
- Contact resistance: 100mΩ Max
- OF:1.2±0.4N
- FP:23±1mm
- OP:22±1mm

端子尺寸:



2. 电路简图



							DSND		SCALE: N/A	MODEL TYPE: DV-16-246UN-3		
Δ X					ANGLAR		$\pm 5^{\circ}$	DWN		VIEW: 	PART NO.:	
Δ X					$L \leq 4$		± 0.2	CHKD		UNIT: mm/in	DWG NO.:	
Δ X					$4 < L \leq 16$		± 0.3	APPD		SIZE: A4	X-DV-16-246UN-3	
Δ X					$16 < L \leq 63$		± 0.4					
MARK	DESCRIPTION			DATE	REVISED	APPROVED	$L > 63$	± 0.5				
						UNSPECIFIED TOLERANCES						
									XKB INDUSTRIAL PRECISION CO.,LIMITED			
									WEIGHT	SHEET	REVISION	
										1/1	A0	