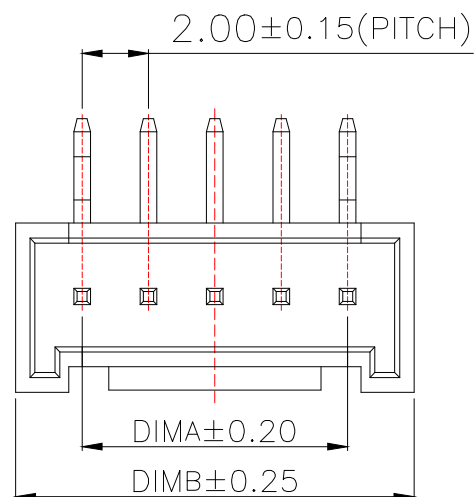




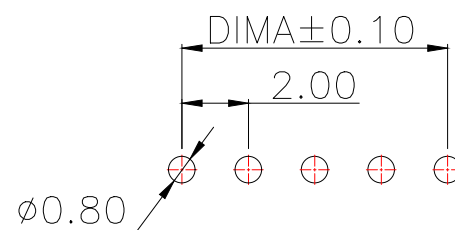
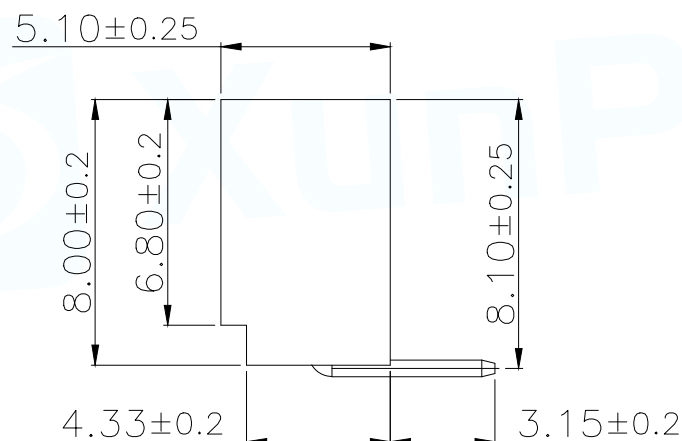
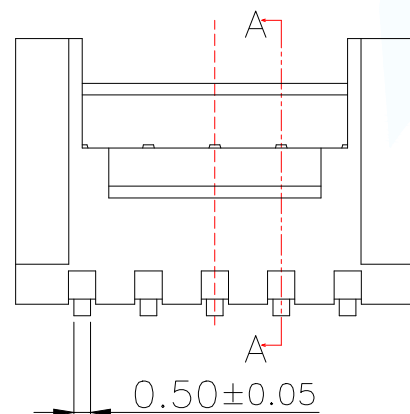
Technical Index:

1. Temperature range: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.

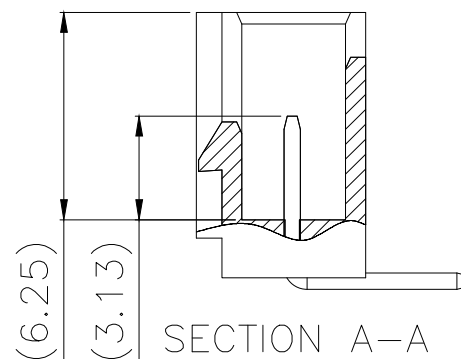
2. Rated voltage: 200V

DC/AC(rms).

3. Rated current: 2.0A.

4. Contact resistance: $\leq 25\text{m}\Omega$.5. Withstanding voltage: 500V
AC/minute.6. Insulation resistance: $\geq 1000\text{M}\Omega$.

序号	品名	材质
1	HY2.0 弯针 胶芯	PA66 UL94V-2 Beige
2	HY2.0 弯针 端子	Copper Alloy/ Tin Plating



适用线路板(PCB LAYOUT)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: HY2.0 弯针带扣	
		PAR	WAFER-HY2.0-NPWZ-Y62
DECIMALS:	ANGLES:	DWN	
X.:±0.50	X':.:±5°	CHKD	
.X:±0.20	X.X':.:±3°	APVD	
.XX:±0.10	X.XX':.:±1°	SCALE:1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1