

APPEARANCE



DFN1006-2L (Bottom View)

PIN CONFIGURATION



Pin configuration (Top view)

Descriptions

The APES5.0H30-10 is a Uni-directional transient voltage suppressor (TVS) to protect sensitive electronic components from electrostatic discharge (ESD). It is particularly well-suited for cellular phones, PMP , MID, PDA, digital cameras and other electronic quipment. The APES5.0H30-10 is safely dissipating ESD strikes to meet the ESD immunity testing of IEC61000-4-2 ($\pm 30\text{KV}$).


The APES5.0H30-10 is available in DFN1006-2L package. Standard products are Pb-free and Halogen-free.

Order information

Device	Package	Shipping
APES5.0H30-10	DFN1006-2L	10000/Tape&Reel

Electrical Parameters (T=25°C)

Symbol	Parameter
V_{RW}	Reverse Stand-off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
I_F	Forward Current
V_F	Forward Voltage @ I_F

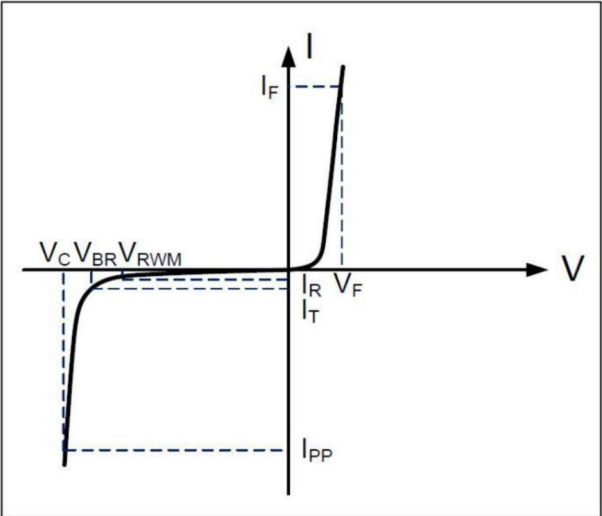


Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse power ($t_p = 8/20\mu s$)	Ppk	375	W
Peak pulse current ($t_p = 8/20\mu s$)	I _{PP}	25	A
ESD according to IEC61000-4-2 air discharge	V _{ESD}	±30	kV
ESD according to IEC61000-4-2 contact discharge		±30	kV
Junction temperature	T _J	150	°C
Operating temperature	T _{OP}	-55~125	°C
Storage temperature	T _{STG}	-55~150	°C


Electronics characteristics (T_a=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-off Voltage	VRWM				5.0	V
Reverse Breakdown Voltage	VBR	I _t =1mA	5.8	7.0	8.2	V
Reverse Leakage Current	I _R	VRWM=5.0V			0.8	uA
Clamping Voltage	VC	I _{pp} =30A, $t_p=8/20\mu s$			20	V
Junction Capacitance	C _j	VR=0V, f=1MHz		166		pF


Typical characteristics (Ta=25°C)

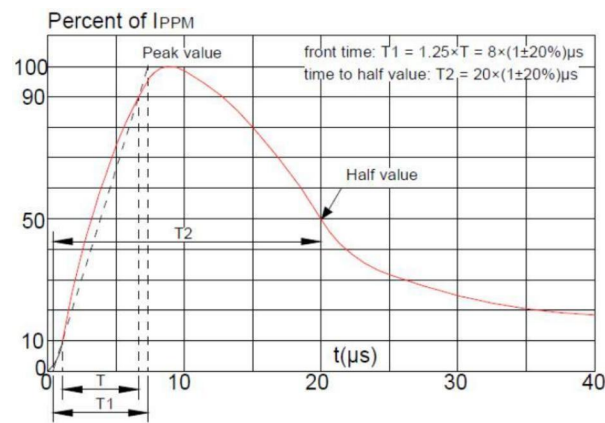

Pulse Waveform (8/20us)

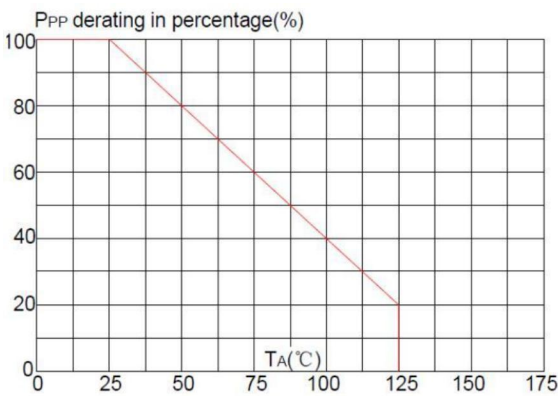


Pulse Derating Curve

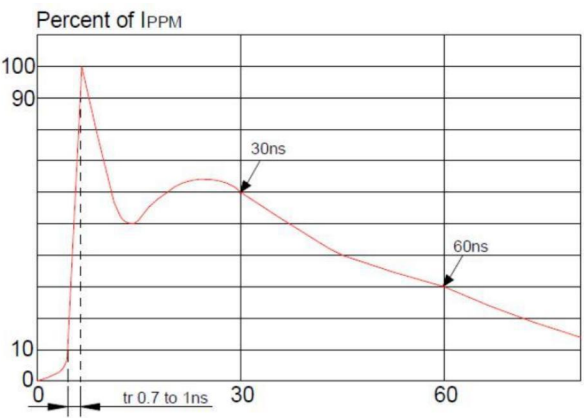


ESD Clamping(8kV Contact Discharge)


PACKAGE OUTLINE DIMENSIONS(DFN1006-2L)

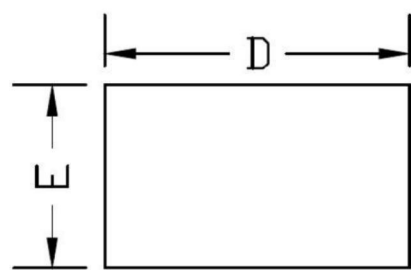

TOP VIEW

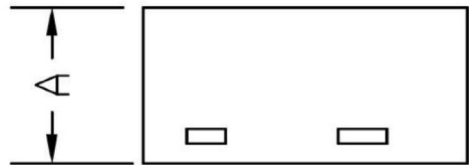

SIDE VIEW

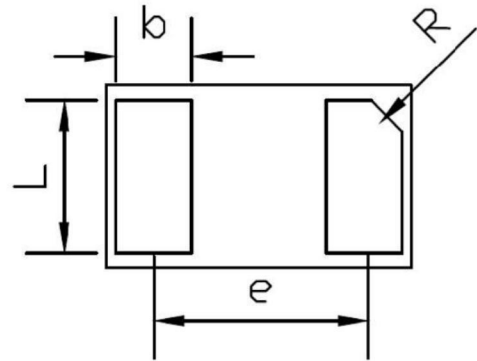

BOTTOM VIEW

COMMON DIMENSION (MM)			
PKG	DFN1006		
REF.	MIN.	NOM.	MAX
A	0.45	0.50	0.55
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.675		
R	0.07	0.10	0.13

Note:
This recommended land pattern is for reference purpose only.