

REV.	ECN. NO.	APPD.
A		

材料数据

材质：

Pin: 黄铜, C3604

电镀：

镀锡: 2 μm/80 μ "镍, 5 μm/200 μ 锡

镀金: 2 μm/80 μ "镍, 0.8 μ "金

阻燃等级: PPS UL94V-0

电气性能

额定电流: 3Amps/contact max.

接触电阻: $\leq 10m\Omega$ /contact

绝缘电阻: $\geq 1000M\Omega$ at V=100V




工作电压: 60VAC/DC

物理性能:


机械寿命: min 500

工作温度范围: -40° C to +105° C

焊接温度: +255° C

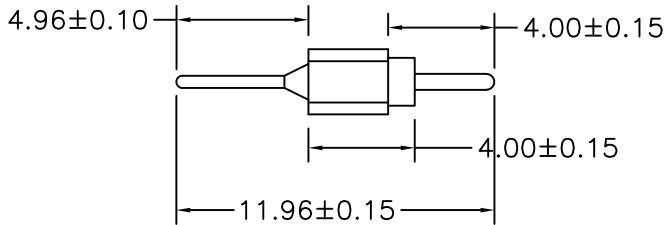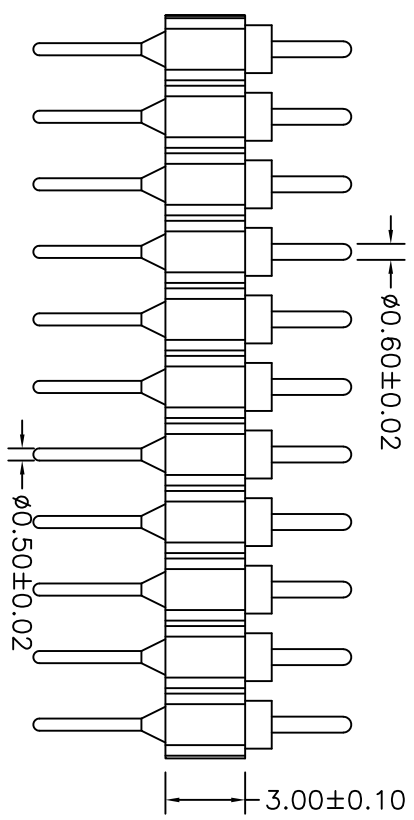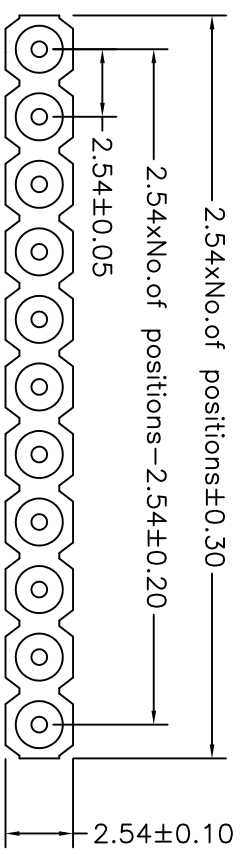

P.C.B LAYOUT

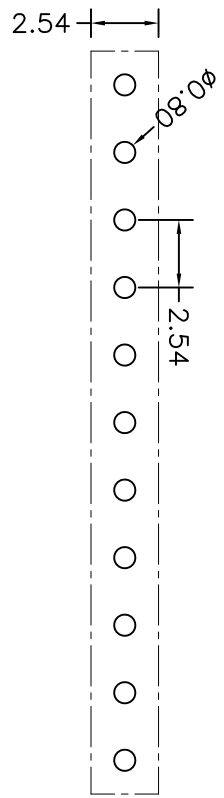

MT	X	X	X	-	X	XX	XXX
Specifications	Pitch(mm)	Insulator Type	Angel Options	No. of Positions	Pin Length Options		
A=Public seat	A=1.27	I=Single row	R=90°	XX positions	1196=11.96mm		
B=Female seat	B=1.778	J=Double row	S=90°				
	C=2.00	K=Three row	I=IC				
	D=2.54						

X. ± 0.30			X.° ± 5°	UNITS	mm	NAME(INTENDED USE)			MINTRON CO.,LTD.			
.X ± 0.20			.X° ± 2°	MATL		PART NO.(INTENDED USE)						
.XX ± 0.10			.XX° ± 1°	FINISH		TITLE:						
.XXX ± 0.05			.XXX° ± 0.5°	APPD: SUNNY			Socket Connectors 2.54mm L=11.96mm H=3.0mm 常規型					
PIN CONNECTOR				QTY		CHKD: USA		DWG NO.:		MTAD1-DXX1196		
				DR: ZOE		2016-04-05				SCALE 1 / 1	SHEET 1 / 1	REV. A