


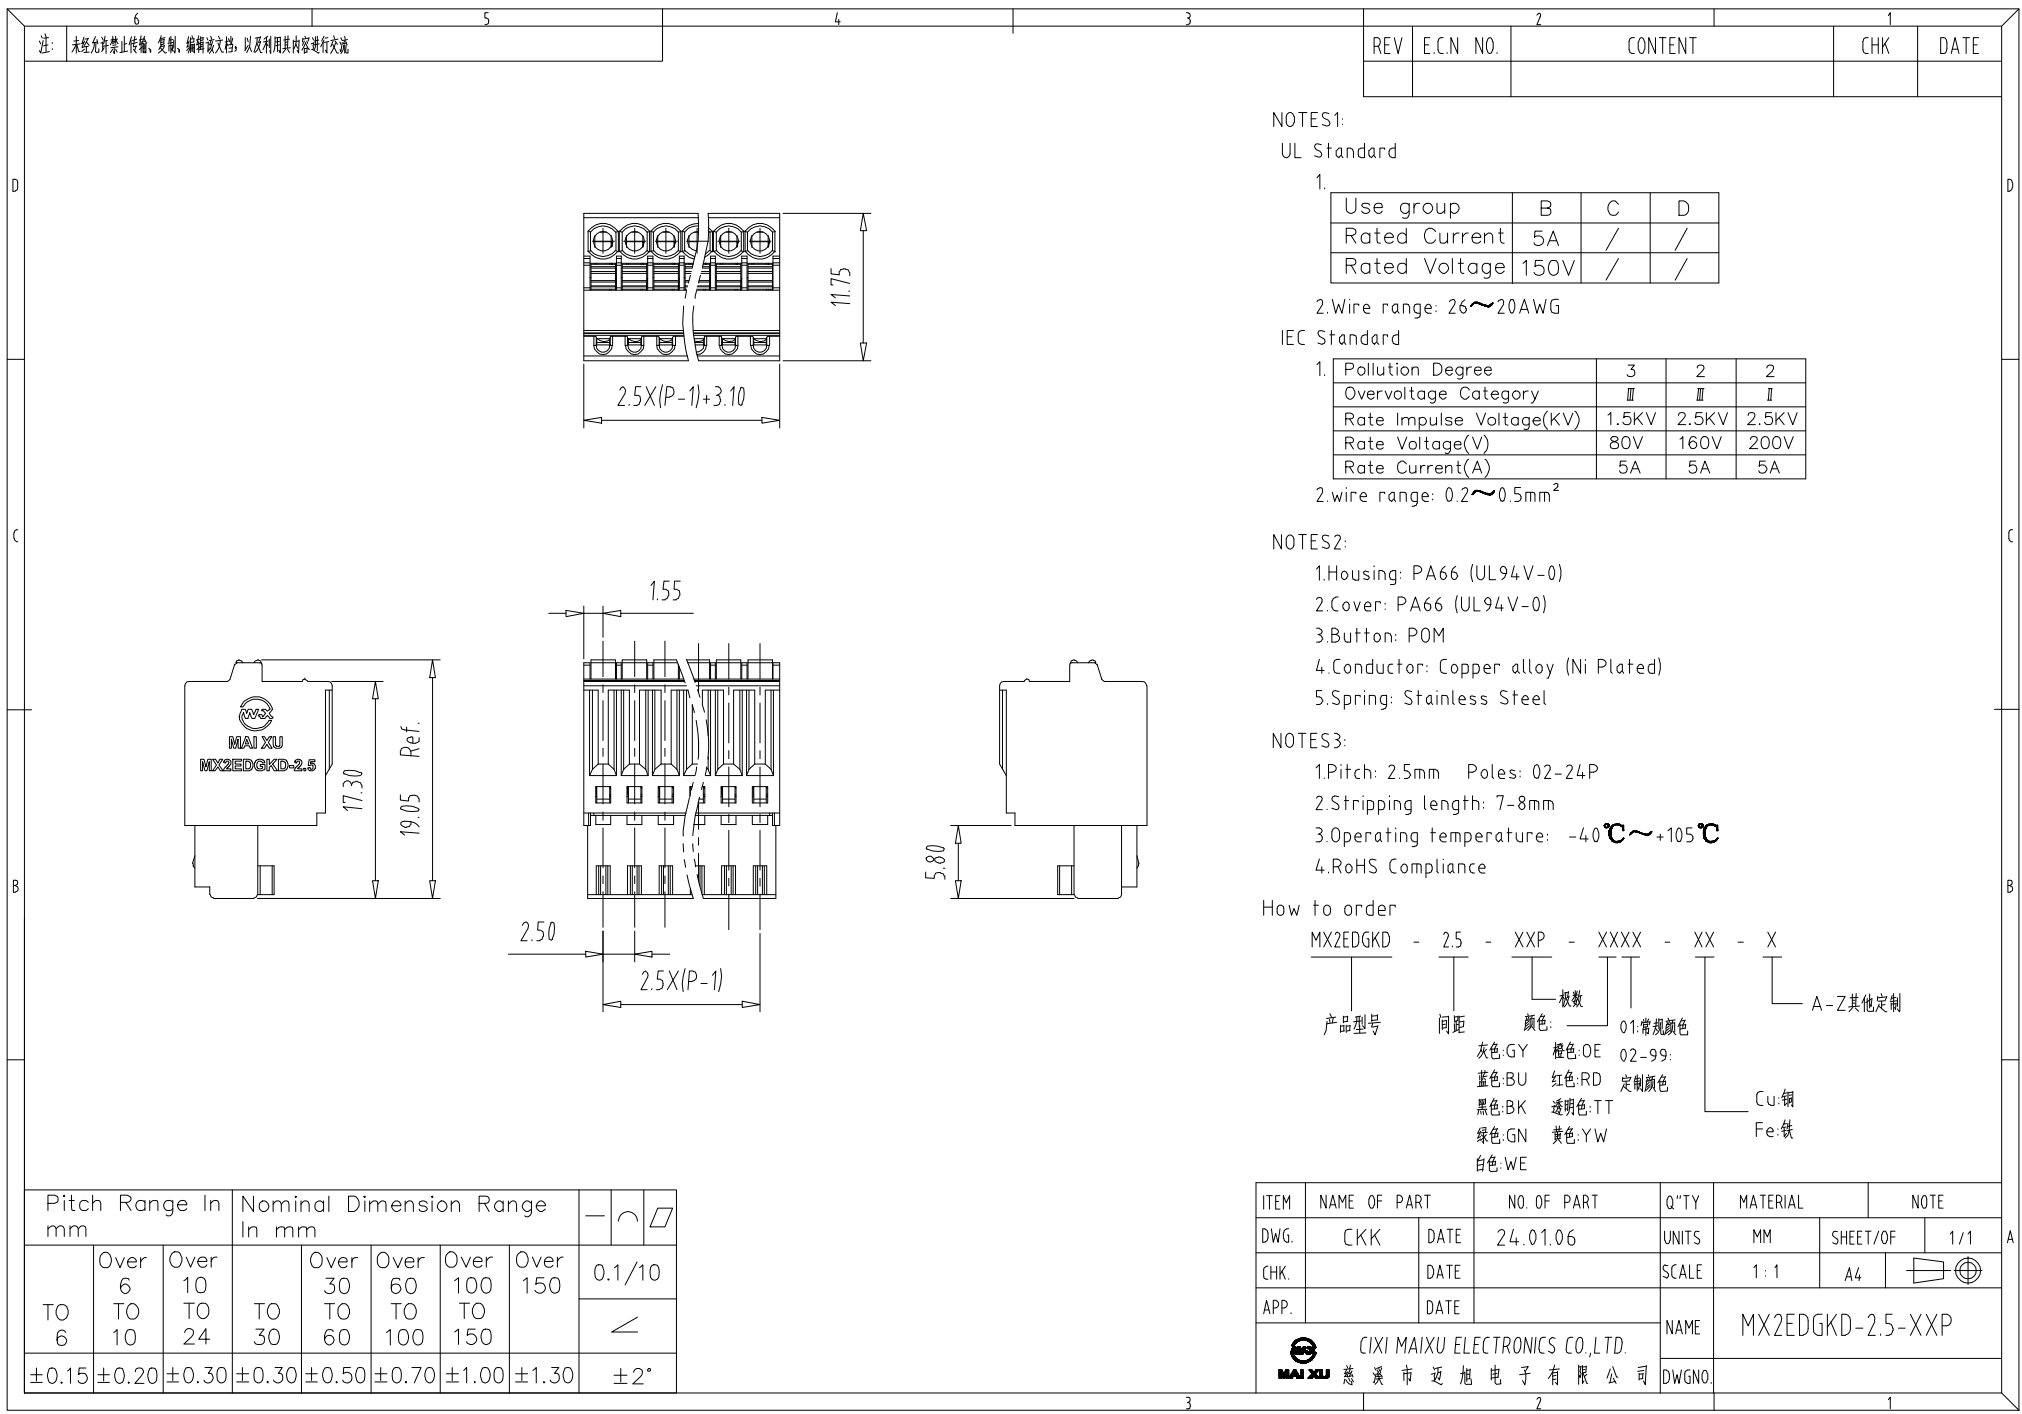

注: 未经许可禁止传播、复制、编辑该文档, 以及利用其内容进行交流

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	5A	/	/
Rated Voltage	150V	/	/

2.Wire range: 26~20AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	1.5KV	2.5KV	2.5KV
Rate Voltage(V)	80V	160V	200V
Rate Current(A)	5A	5A	5A

2.wire range: 0.2~0.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Ni Plated)
- 5.Spring: Stainless Steel

NOTES3:

- 1.Pitch: 2.5mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX2EDGKD - 2.5 - XXP - XXXX - XX - X

产品型号 间距 极数 颜色: 01:常规颜色 A-Z其他定制

灰色:GY 橙色:OE 02-99: 定制颜色

蓝色:BU 红色:RD

黑色:BK 透明色:TT

绿色:GN 黄色:YW

白色:WE

Cu:铜

Fe:铁

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	□
TO	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	CHK	DATE	24.01.06	UNITS	MM	SHEET/OF	1/1	A
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司				NAME	MX2EDGKD-2.5-XXP			
				DWGNO.				