

产 品 基 本 参 数





安倍:7A 电压:250V

胶壳: 尼龙66工程塑料, UL 94V-0阻燃等级




温度: 110° C (UL),-40° C to T110° C(IEC)

触点材料: 黄铜 (H65)环保, 镀亮锡

接线位数: 2位-24位

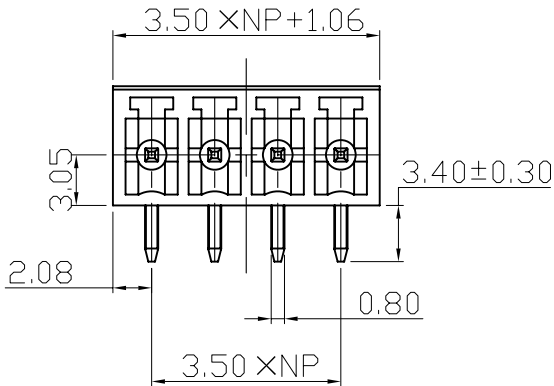

PCB LAYOUT

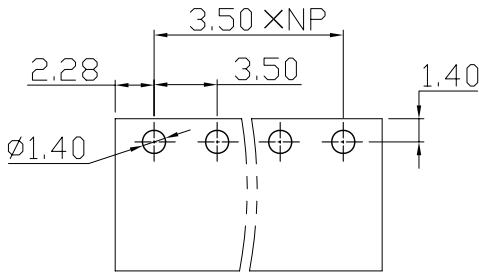

		new		2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	2EDGR-3.5-XXP	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	2EDGR-3.5-XXP			X.x ±0.20		
			3RD ANGLE PROJ	HanElectricity Co.,LTD				FILE.NO.	