

零件承认书

SPECIFICATION FOR APPROVAL

客户名称：0001

规格描述：ZYNR6045磁胶电感规格书

日期：2023/10/10

增益签核：

制订	审核	核准
夏琳	陈雨	李万

客户签核：

工程	审核	核准



东莞市增益实业有限公司

地址：东莞市塘厦镇林村塘厦大道北552号

电话：0769-87321000

传真：0769-87891229

物料类型：

磁胶电感

日期：

2023/10/10

版本：

A



◆特征:

- 磁性胶水涂敷结构极大减少了蜂鸣声
- 大电流低直流阻抗
- 直接在磁芯上金属化电极,抗跌落冲击强
经久耐用
- 闭合磁路结构设计,漏磁少,抗 EMI 能力强
- 省空间,更省电
- 符合 RoHS,无卤和 REACH

◆用途:

- 广泛应用于 LED 背光板、平板电视、
蓝光 DVD 机顶盒、笔记本电脑、台式电脑、
服务器、显卡、便携式游戏机、个人导航系统、
多媒体、汽车产品 、通信设备、直流转换.

◆环境:

- 工作温度: -40°C 至 $+125^{\circ}\text{C}$
(包括线圈自身温升)

◆试验设备:

- 电感值:HP4284A, HP4285A 或同等仪器
- 电流:HP4284+42841A
- 直流电阻: Chroma 16502 或同等仪器

◆产品型号:

Features:

- Magnetic-resin shielded construction reduces buzz
Noise to ultra-low levels
- Large Current and Low DCR
- Metallization on Ferrite Core results in excellent shock
Resistance and damage-free durability
- Closed magnetic circuit design reduces leakage
Flux and Electro Magnetic Interference (EMI)
- Takes up less PCB real estate and save more power
Small parasitic capacitance
- RoHS, Halogen Free and REACH Compliance

Applications:

- LED backlight、Flat-screen TVs, blue-ray disc
Set top box、Notebooks, desktop computers, servers,
Graphic cards、Portable gaming devices, personal
Navigation systems, personal multimedia devices,
Automotive systemsTelecomm base station 、DC-DC
Converter

Environmental Data:

- Operating Temperature: -40°C to $+125^{\circ}\text{C}$
(Including coils self-temperature rise)

Test Equipment:

- L:HP4284A or HP4285A LCR meter or equivalent
- Isat & Irms: HP4284+42841A
- DCR:Chroma 16502 or equivalent

Product Identification:

ZYNR

①

8040

②

100

③

M

④

①

类型 Type	
ZYNR	闭磁路贴片磁胶电感 Shielded SMT Power Inductors 

②

外形尺寸(L×W×H) (mm) External Dimensions (L×W×H) (mm)	
8040	8.0×8.0×4.2

③


Inductance
10 uH

④

公差 Inductance Tolerance
K: $\pm 10\%$, M: $\pm 20\%$, N: $\pm 30\%$

◆外观尺寸:

Shape and Dimensions(dimensions are in mm):

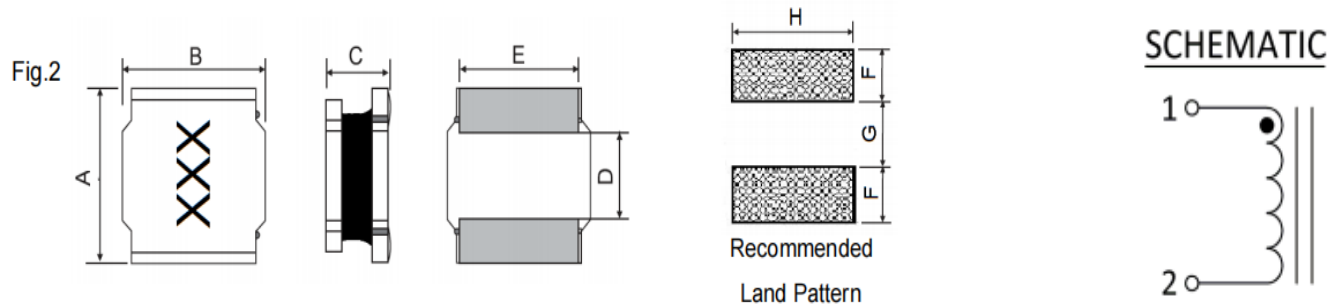

Part No	ITEM								
	Shap	A	B	C	D	E	F	G	H
ZYNR6045	Fig.2	6.0±0.3	6.0±0.3	4.5 Max	2.9±0.3	4.9±0.3	1.7 Typ	2.8 Typ	5.7 Typ



■ ZYNR6045 Series

Part Number	Inductance (uH) @100KHz	DC Resistance (Ω)		额定电流	饱和电流
		Typ.	Max.	Current (A)	Current (A)
ZYNR6045-R47□	0.47	0.006	0.008	6.50	15.000
ZYNR6045-R56□	0.56	0.006	0.008	6.50	14.000
ZYNR6045-R68□	0.68	0.006	0.008	5.70	11.000
ZYNR6045-R82□	0.82	0.008	0.010	5.90	10.350
ZYNR6045-1R0□	1.00	0.011	0.014	5.14	9.850
ZYNR6045-1R5□	1.50	0.012	0.016	4.95	8.800
ZYNR6045-1R8□	1.80	0.012	0.016	4.95	7.600
ZYNR6045-2R2□	2.20	0.014	0.018	4.60	6.750
ZYNR6045-2R7□	2.70	0.015	0.020	4.30	5.750
ZYNR6045-3R0□	3.00	0.020	0.026	3.80	5.600
ZYNR6045-3R3□	3.30	0.021	0.027	3.70	5.900
ZYNR6045-3R6□	3.60	0.021	0.027	3.70	5.250
ZYNR6045-4R7□	4.70	0.026	0.034	3.30	4.970
ZYNR6045-5R6□	5.60	0.029	0.038	3.15	4.150
ZYNR6045-6R2□	6.20	0.031	0.040	3.00	4.430
ZYNR6045-6R8□	6.80	0.031	0.040	3.00	3.900
ZYNR6045-7R5□	7.50	0.034	0.044	2.90	3.500
ZYNR6045-8R2□	8.20	0.043	0.056	2.60	3.900
ZYNR6045-9R1□	9.10	0.043	0.056	2.60	3.350
ZYNR6045-100□	10.0	0.048	0.062	2.45	3.200
ZYNR6045-120□	12.0	0.058	0.075	2.20	2.800
ZYNR6045-150□	15.0	0.068	0.088	2.05	2.500
ZYNR6045-180□	18.0	0.081	0.105	1.85	2.200



■ ZYNR6045 Series

Part Number	Inductance (uH) @100KHz	DC Resistance (Ω)		额定电流	饱和电流
		Typ.	Max.	Current (A)	Current (A)
ZYNR6045-220□	22.0	0.089	0.116	1.80	2.050
ZYNR6045-270□	27.0	0.102	0.133	1.65	1.900
ZYNR6045-300□	30.0	0.132	0.172	1.50	1.700
ZYNR6045-330□	33.0	0.137	0.178	1.45	1.650
ZYNR6045-360□	36.0	0.173	0.225	1.40	1.620
ZYNR6045-390□	39.0	0.180	0.234	1.25	1.500
ZYNR6045-430□	43.0	0.200	0.260	1.20	1.630
ZYNR6045-470□	47.0	0.200	0.260	1.20	1.400
ZYNR6045-510□	51.0	0.207	0.269	1.15	1.350
ZYNR6045-560□	56.0	0.221	0.287	1.10	1.300
ZYNR6045-620□	62.0	0.235	0.306	1.10	1.250
ZYNR6045-680□	68.0	0.289	0.376	1.00	1.200
ZYNR6045-750□	75.0	0.305	0.397	0.95	1.150
ZYNR6045-820□	82.0	0.341	0.443	0.90	1.050
ZYNR6045-910□	91.0	0.359	0.467	0.85	1.000
ZYNR6045-101□	100	0.433	0.563	0.80	0.950
ZYNR6045-121□	120	0.484	0.629	0.77	0.850
ZYNR6045-151□	150	0.580	0.754	0.70	0.800
ZYNR6045-221□	220	0.834	1.084	0.59	0.700
ZYNR6045-271□	270	1.096	1.425	0.55	0.650
ZYNR6045-331□	330	1.270	1.651	0.57	0.570
ZYNR6045-391□	390	1.800	2.340	0.40	0.500
ZYNR6045-471□	470	1.800	2.340	0.42	0.500




■ ZYNR6045 Series

Part Number	Inductance (uH) @100KHz	DC Resistance (Ω)		额定电流	饱和电流
		Typ.	Max.	Current (A)	Current (A)
ZYNR6045-561□	560	2.480	3.224	0.33	0.460
ZYNR6045-681□	680	2.500	3.250	0.33	0.420
ZYNR6045-751□	750	3.700	4.810	0.30	0.400
ZYNR6045-821□	820	3.700	4.810	0.30	0.360
ZYNR6045-102□	1000	4.500	5.850	0.30	0.300
ZYNR6045-152□	1500	6.750	8.100	0.21	0.240
ZYNR6045-202□	2000	9.700	11.640	0.175	0.210
ZYNR6045-222□	2200	10.000	12.000	0.169	0.205
ZYNR6045-252□	2500	10.570	12.680	0.167	0.200
ZYNR6045-332□	3300	13.000	15.300	0.150	0.170
ZYNR6045-472□	4700	18.750	22.500	0.120	0.150
ZYNR6045-502□	5000	20.000	24.000	0.115	0.135
ZYNR6045-602□	6000	30.000	36.000	0.097	0.125
ZYNR6045-682□	6800	31.200	37.400	0.095	0.120
ZYNR6045-702□	7000	33.000	39.600	0.090	0.120
ZYNR6045-802□	8000	35.500	42.600	0.085	0.115
ZYNR6045-103□	10000	40.000	48.000	0.08	0.100
ZYNR6045-123□	12000	62.000	74.400	0.065	0.095
ZYNR6045-143□	14000	63.500	76.200	0.063	0.090
ZYNR6045-153□	15000	70.000	84.000	0.060	0.080

- ※ The saturation current value is the DC current value having inductance decrease down to 30%.(at 20℃)
- ※ The temperature rise current value is the DC current value having temperature increase up to 40℃. (at 20℃)
- ※ The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.




■ Taping Dimensions(Unit:mm)

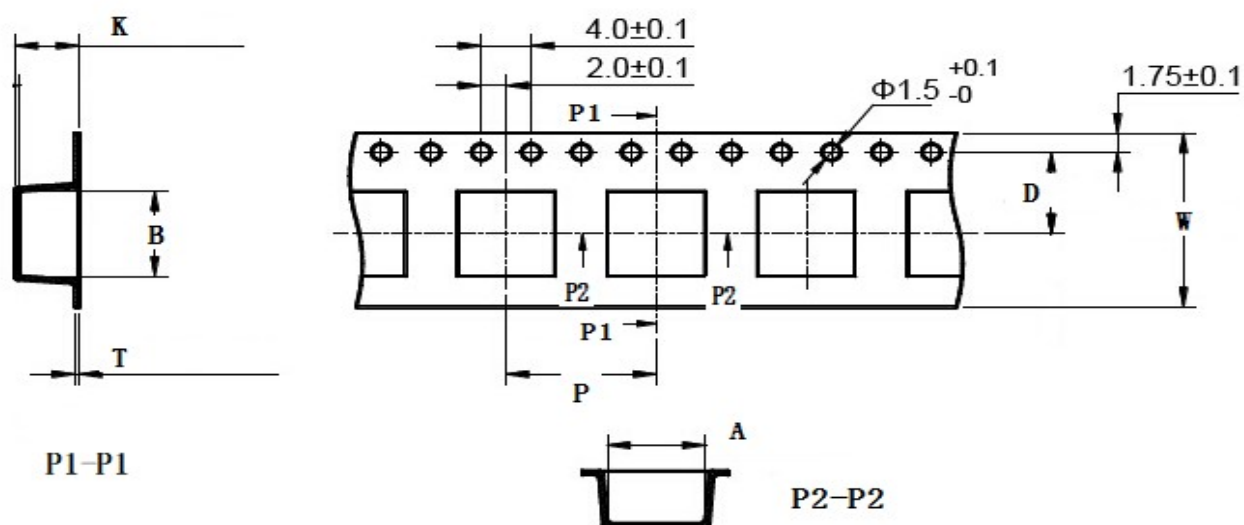

TYPE	Chip Thickness	W	A	B	D	P	K Max	T Max	MPQ
ZYNR6045	4.50	16.0	6.40	6.40	7.50	8.00	4.70	0.40	1500


■ Reel Dimensions(Unit:mm)

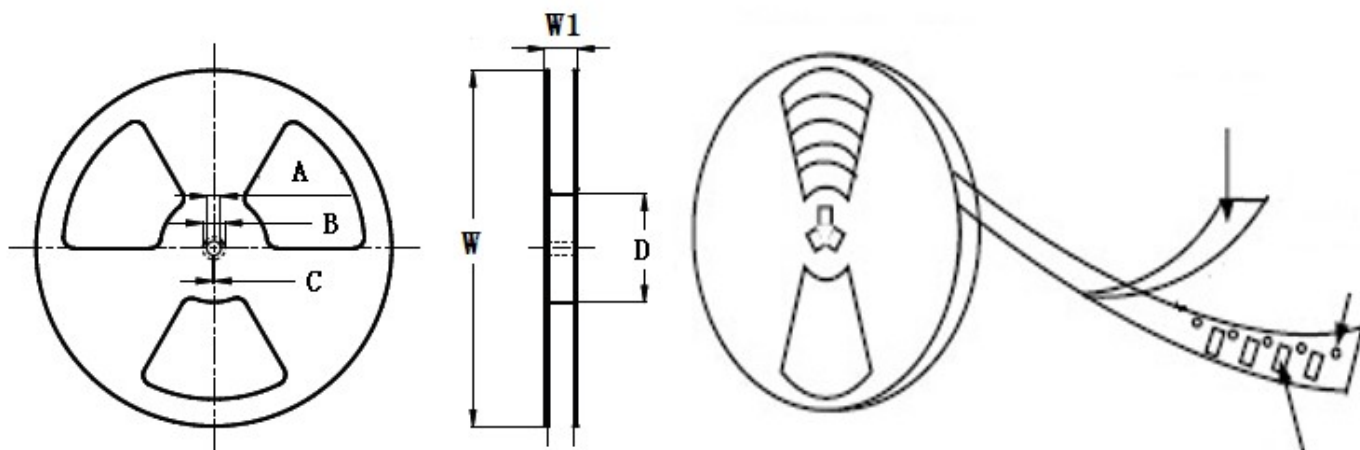


TYPE	W	W1	A	B	C	D
ZYNR6045	330±2.0	16.5±1.50	13.0±0.50	21.0±0.80	2.0±0.50	100 Min



■ Direction of rolling

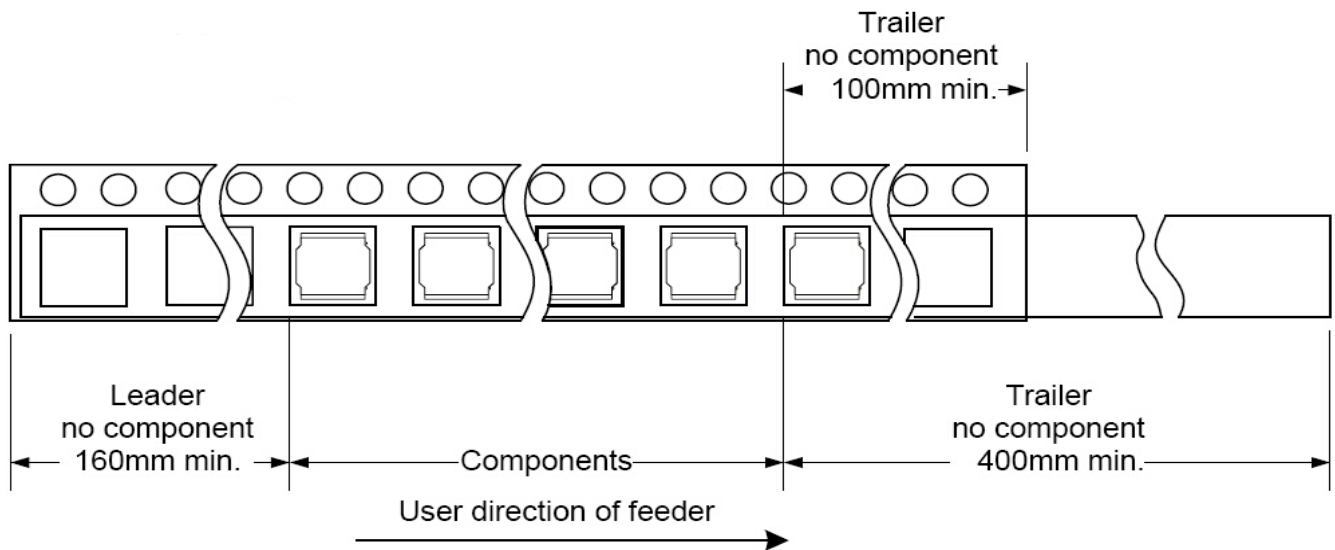

■ Cover tape peel off condition

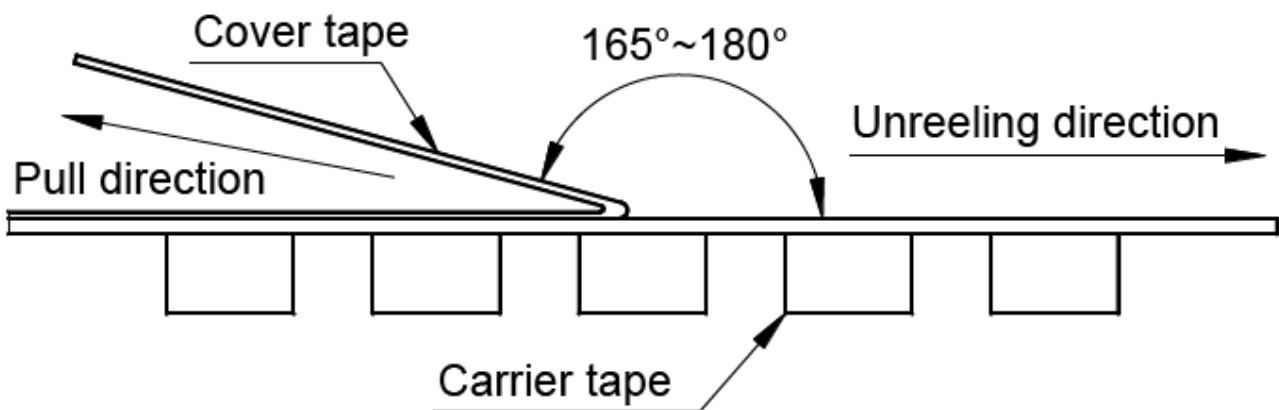

Cover tape peel force shall be 0.1N to 1.3N.

Reference peel speed 300 ± 10 mm/min.

使用注意事项

REMINDERS FOR USING THESE PRODUCTS



- 保存时间为12 个月以内，保存条件（温度5~40°C以下、湿度35 ~ 66%RH 以下），需充分注意。
若超过保存时间，端子电极的可焊性将可能老化。

The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5~40°C, humidity: 35 to 65% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- 请勿在气体腐蚀环境（盐、酸、碱等）下使用和保存。

Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).

- 手上的油脂会导致可焊性降低，应避免用手直接接触端子。

Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.

- 请小心轻拿轻放,避免由于产品的跌落或取出不当而导致的损坏。

Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

- 端子过度弯曲会导致断线,请不要过度弯曲端子。

Don't bend the terminals with excessive stress in case of any wire fracture.

- 不要清洗产品，如需要清洗时请联系我司。

Don't rinse coils by yourself and please contact ZE if necessary.

- 请勿将本产品靠近磁铁或带有磁力的物体

Don't expose the products to magnets or magnetic fields

- 在实施焊接前，请务必进行预热。预热温度与焊接温度及芯片温度的温度差要在150°C 以内。

Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.

- 安装后的焊接修正应在规格书规定的条件范围内。若加热过度可能导致短路、性能降低、寿命减少。

Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.

- 装置会因通电而自我发热（温度上升），因此在热设计方面需留有充分余地。

Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.

- 非磁屏蔽型在基板设计时需注意配置线圈，受到电磁干扰可能会导致误动作。

Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference.

- 当本公司产品使用在一般电子设备以外的场合,如:车载,医疗设备,军用,航空航天等,请务必联系本公司营业部门,如超出本公司产品使用条件而引起的机器故障时,本公司概不负责。

If ZE product will be applied in area like automotive product, medical equipment, military and aerospace except general electronic device, please keep ZE sales informed in advance. ZE shall not be held liable for any malfunction or breakdown caused by using product in the condition which is inconsistent with that recommended by ZE.