


REVISIONS						
P	LTR	DESCRIPTION		DATE	OWN	APVD
G		REVISED PER	ECO-19-013888	8-31-20	CT	DM

D

C

B


A

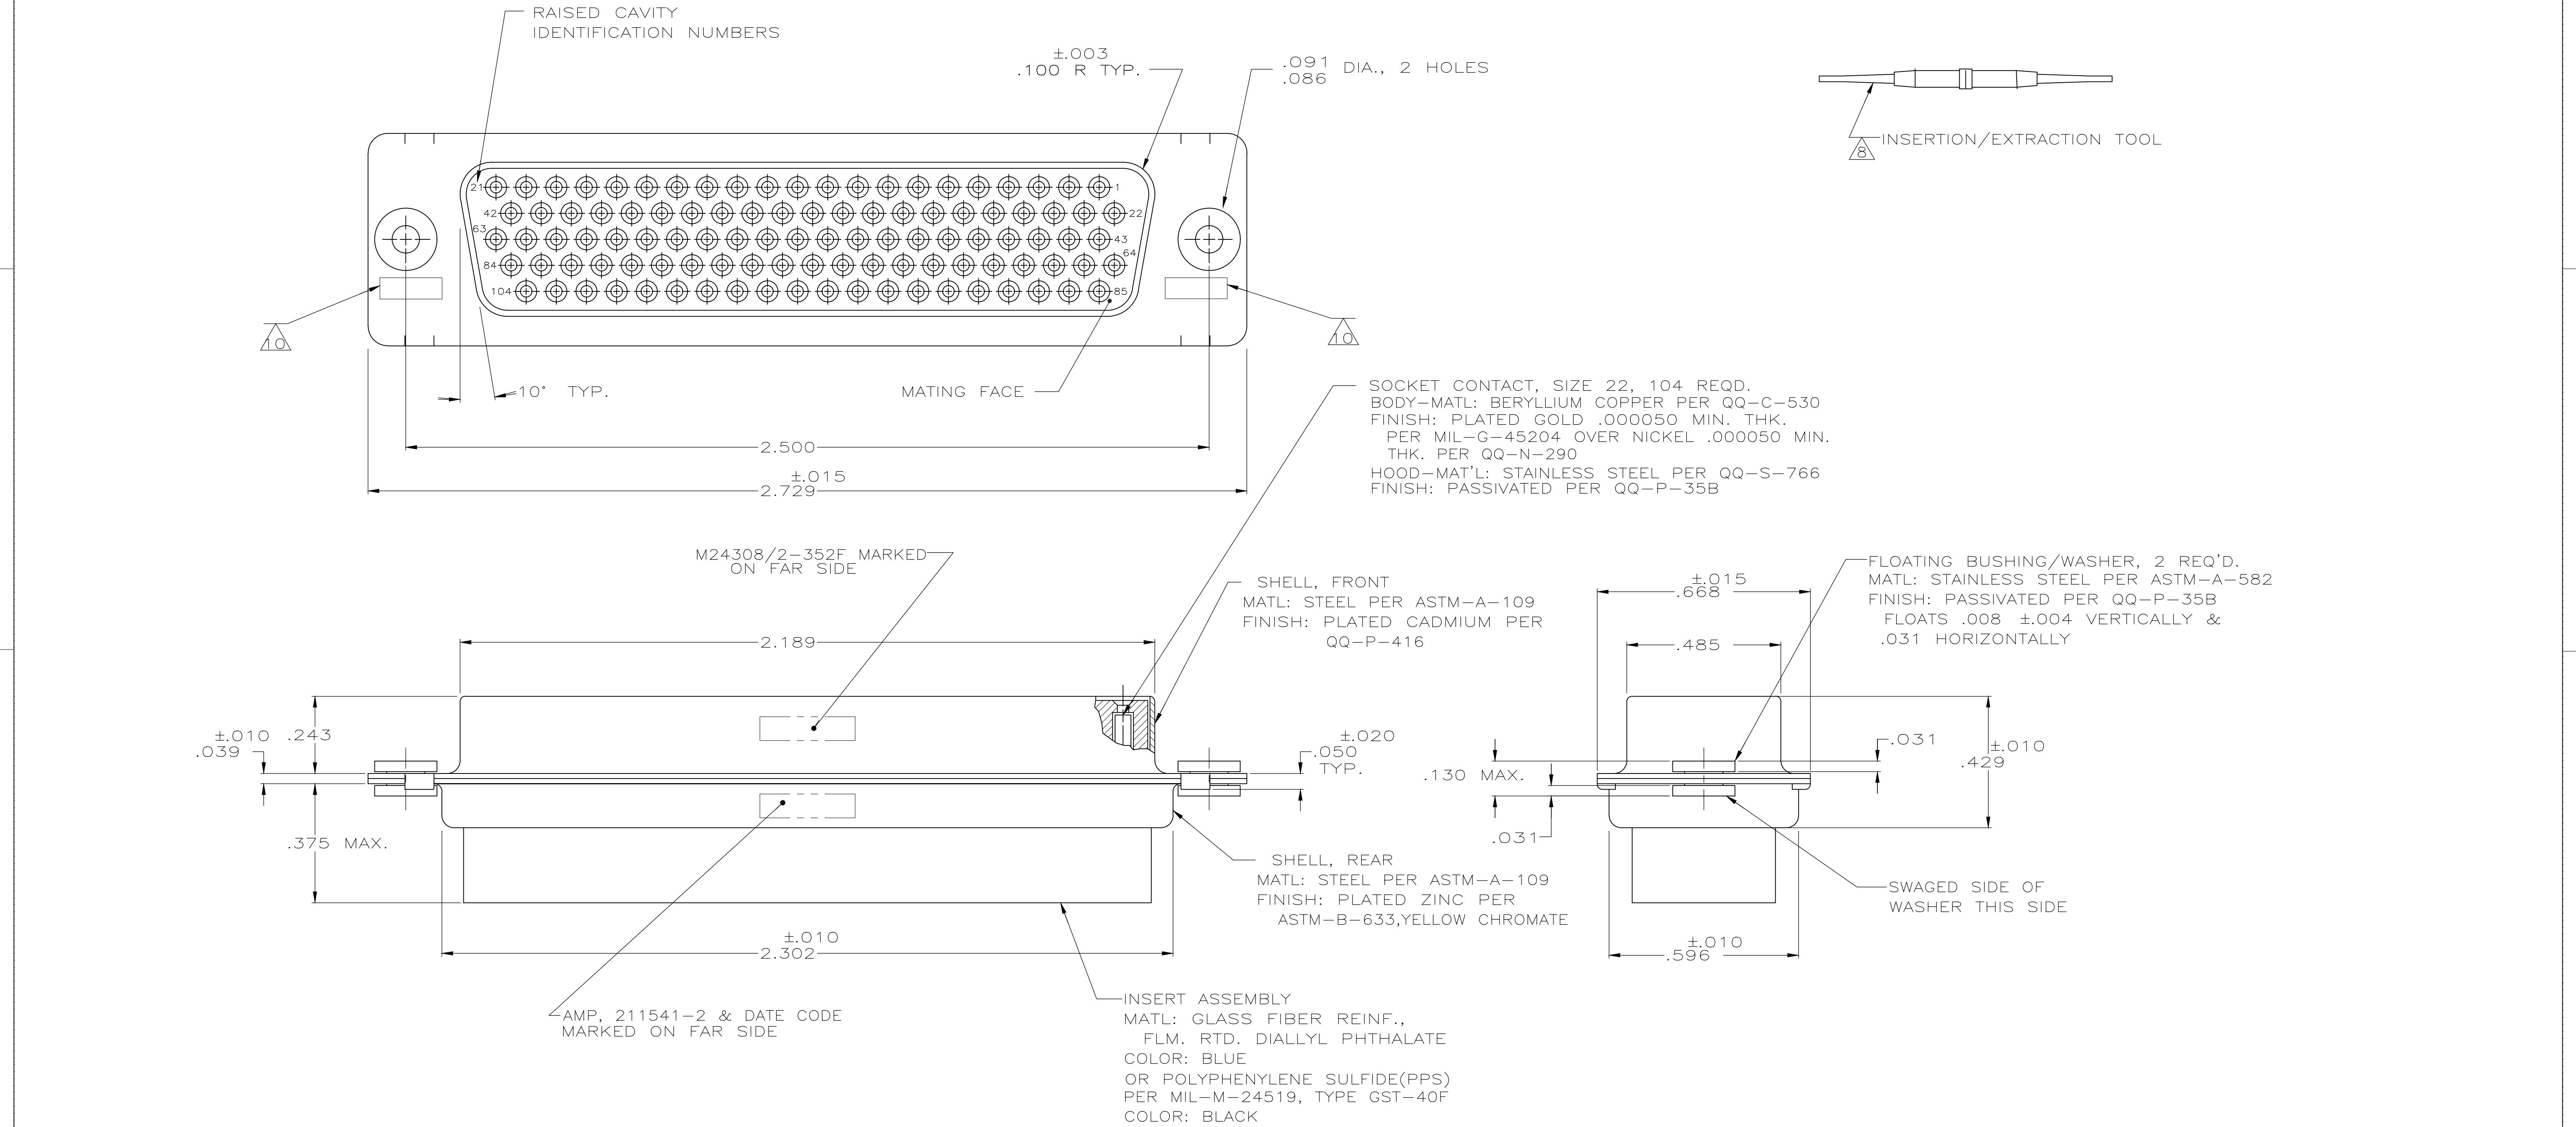

1. THIS RECEPTACLE WILL MATE WITH ANY 104 POSN.,SIZE 6 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.

- 4 PACKAGE STAMPED M24308/2-492F & AMP P/N 211541-1
5 PACKAGE STAMPED M24308/2-352F & AMP P/N 211541-2
6 PACKAGE STAMPED M24308/2-363F & AMP P/N 211541-3
7 AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT
8 AMP P/N 91067-1; MIL P/N M81969/1-04
9 CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
10 UL/CSA DESIGNATION STAMPED IN THIS AREA,OPTIONAL

SUPSD BY 204546-2 & 91067-1	SAME AS -1 EXCEPT: 6 7 8	211541-3
	SAME AS -1 EXCEPT: 5 7	211541-2
	AS SHOWN 4 9	211541-1
DESCRIPTION		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN D.ERDMAN 7/17/85		 TE Connectivity	
DIMENSIONS: INCHES			CHK R.GRZYBOWSKI 9-20-85			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.ROPIER 9-20-85	NAME		
	0 PLC ± -		PRODUCT SPEC	RECEPTACLE ASS'Y.,AMPLIMITE, 104 POSN., SIZE 6, SERIES 90, W/DUAL FLOAT, BUSHING		
	1 PLC ± -		APPLICATION SPEC	SIZE		
	2 PLC ± -.005			CAGE CODE		
	4 PLC ± - ± 0'30"			DRAWING NO		
FINISH		WEIGHT	A1		RESTRICTED TO	
SEE CALLOUT		0.000000	00779		211541	
CUSTOMER DRAWING			SCALE		SHEET	
			NTS		1 OF 1	
					REV G	