


FEATURES

- Low Saturation Voltage: $V_{CE(sat)}=1.7V@I_C=40A$
- High Current Capability
- High Input Impedance

APPLICATIONS

- Synchronous Rectification in SMPS
- Automotive Chargers
- UPS, PFC
- String Inverter

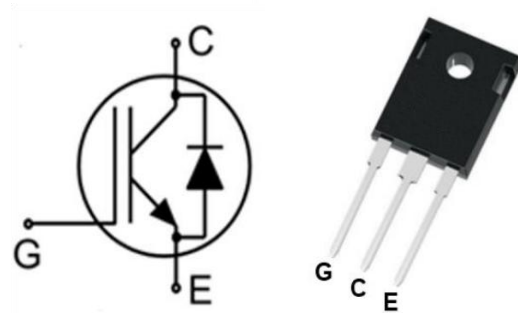

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	VALUE	UNIT
V_{CES}	Collector-Emitter Voltage	1200	V
V_{GES}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current-Continuous @ $T_C=25^\circ C$	82	A
I_C	Collector Current-Continuous @ $T_C=100^\circ C$	67	A
I_{CM}	Pulsed Collector Current	160	A
I_F	Diode Forward Current @ $T_C=25^\circ C$	66	A
	Diode Forward Current @ $T_C=100^\circ C$	42	
I_{FM}	Pulsed forward current	160	A
P_D	Power Dissipation @ $T_C=25^\circ C$	330	W
T_J	Operating Junction Temperature	-40~175	$^\circ C$
T_{stg}	Storage Temperature Range	-40~175	$^\circ C$



ISG2245
eq IKW40N120CH7

Trench Field-Stop Technology IGBT

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case IGBT	0.38	$^{\circ}C/W$

STATIC CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise specified)


SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
V_{CES}	Collector-Emitter Breakdown Voltage	$V_{GE}=0, I_C=1mA$	1200	--	--	V
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$V_{GE}=V_{CE}, I_C=0.64mA$	4.7	5.5	6.2	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=40A, V_{CE}=15V, T_C=25^{\circ}C$	--	1.7	2.15	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=40A, V_{CE}=15V, T_C=175^{\circ}C$	--	2.0	--	V
I_{CES}	Zero Gate Voltage Collector Current	$V_{CE}=1200V, V_{GE}=0$	--	--	40	μA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=\pm 20V, V_{CE}=0$	--	--	± 100	nA

REVERSE DIODE (FRED)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYPE	MAX	UNIT
V_F	Diode Forward Voltage	$I_F=40A, T_J=25^{\circ}C$	--	2.5	3	V
		$I_F=40A, T_J=175^{\circ}C$	--	2.3	--	V

Trench Field-Stop Technology IGBT

PACKAGE OUTLINE (UNIT: mm)

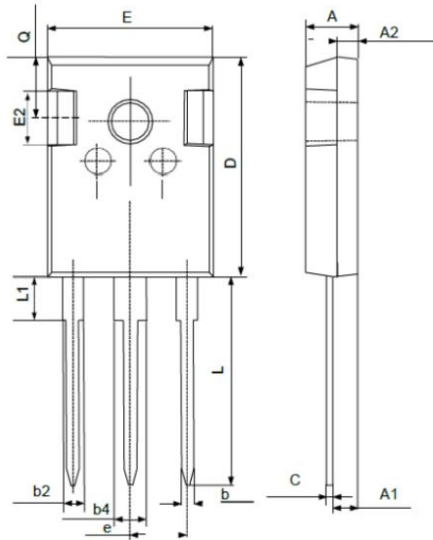

SYMBOL	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	---	1.36
b2	1.91	---	2.25
b4	2.91	---	3.25
c	0.51	---	0.75
D	20.80	21.00	21.30
E	15.50	15.80	16.10
E2	4.40	5.00	5.20
e	5.44 BSC		
L	19.72	19.92	20.22
L1	---	---	4.30
Q	5.60	5.80	6.00

PRODUCT DISCLAIMER

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

It is strictly prohibited to reprint or copy part or all of this datasheet without permission from ISC.