


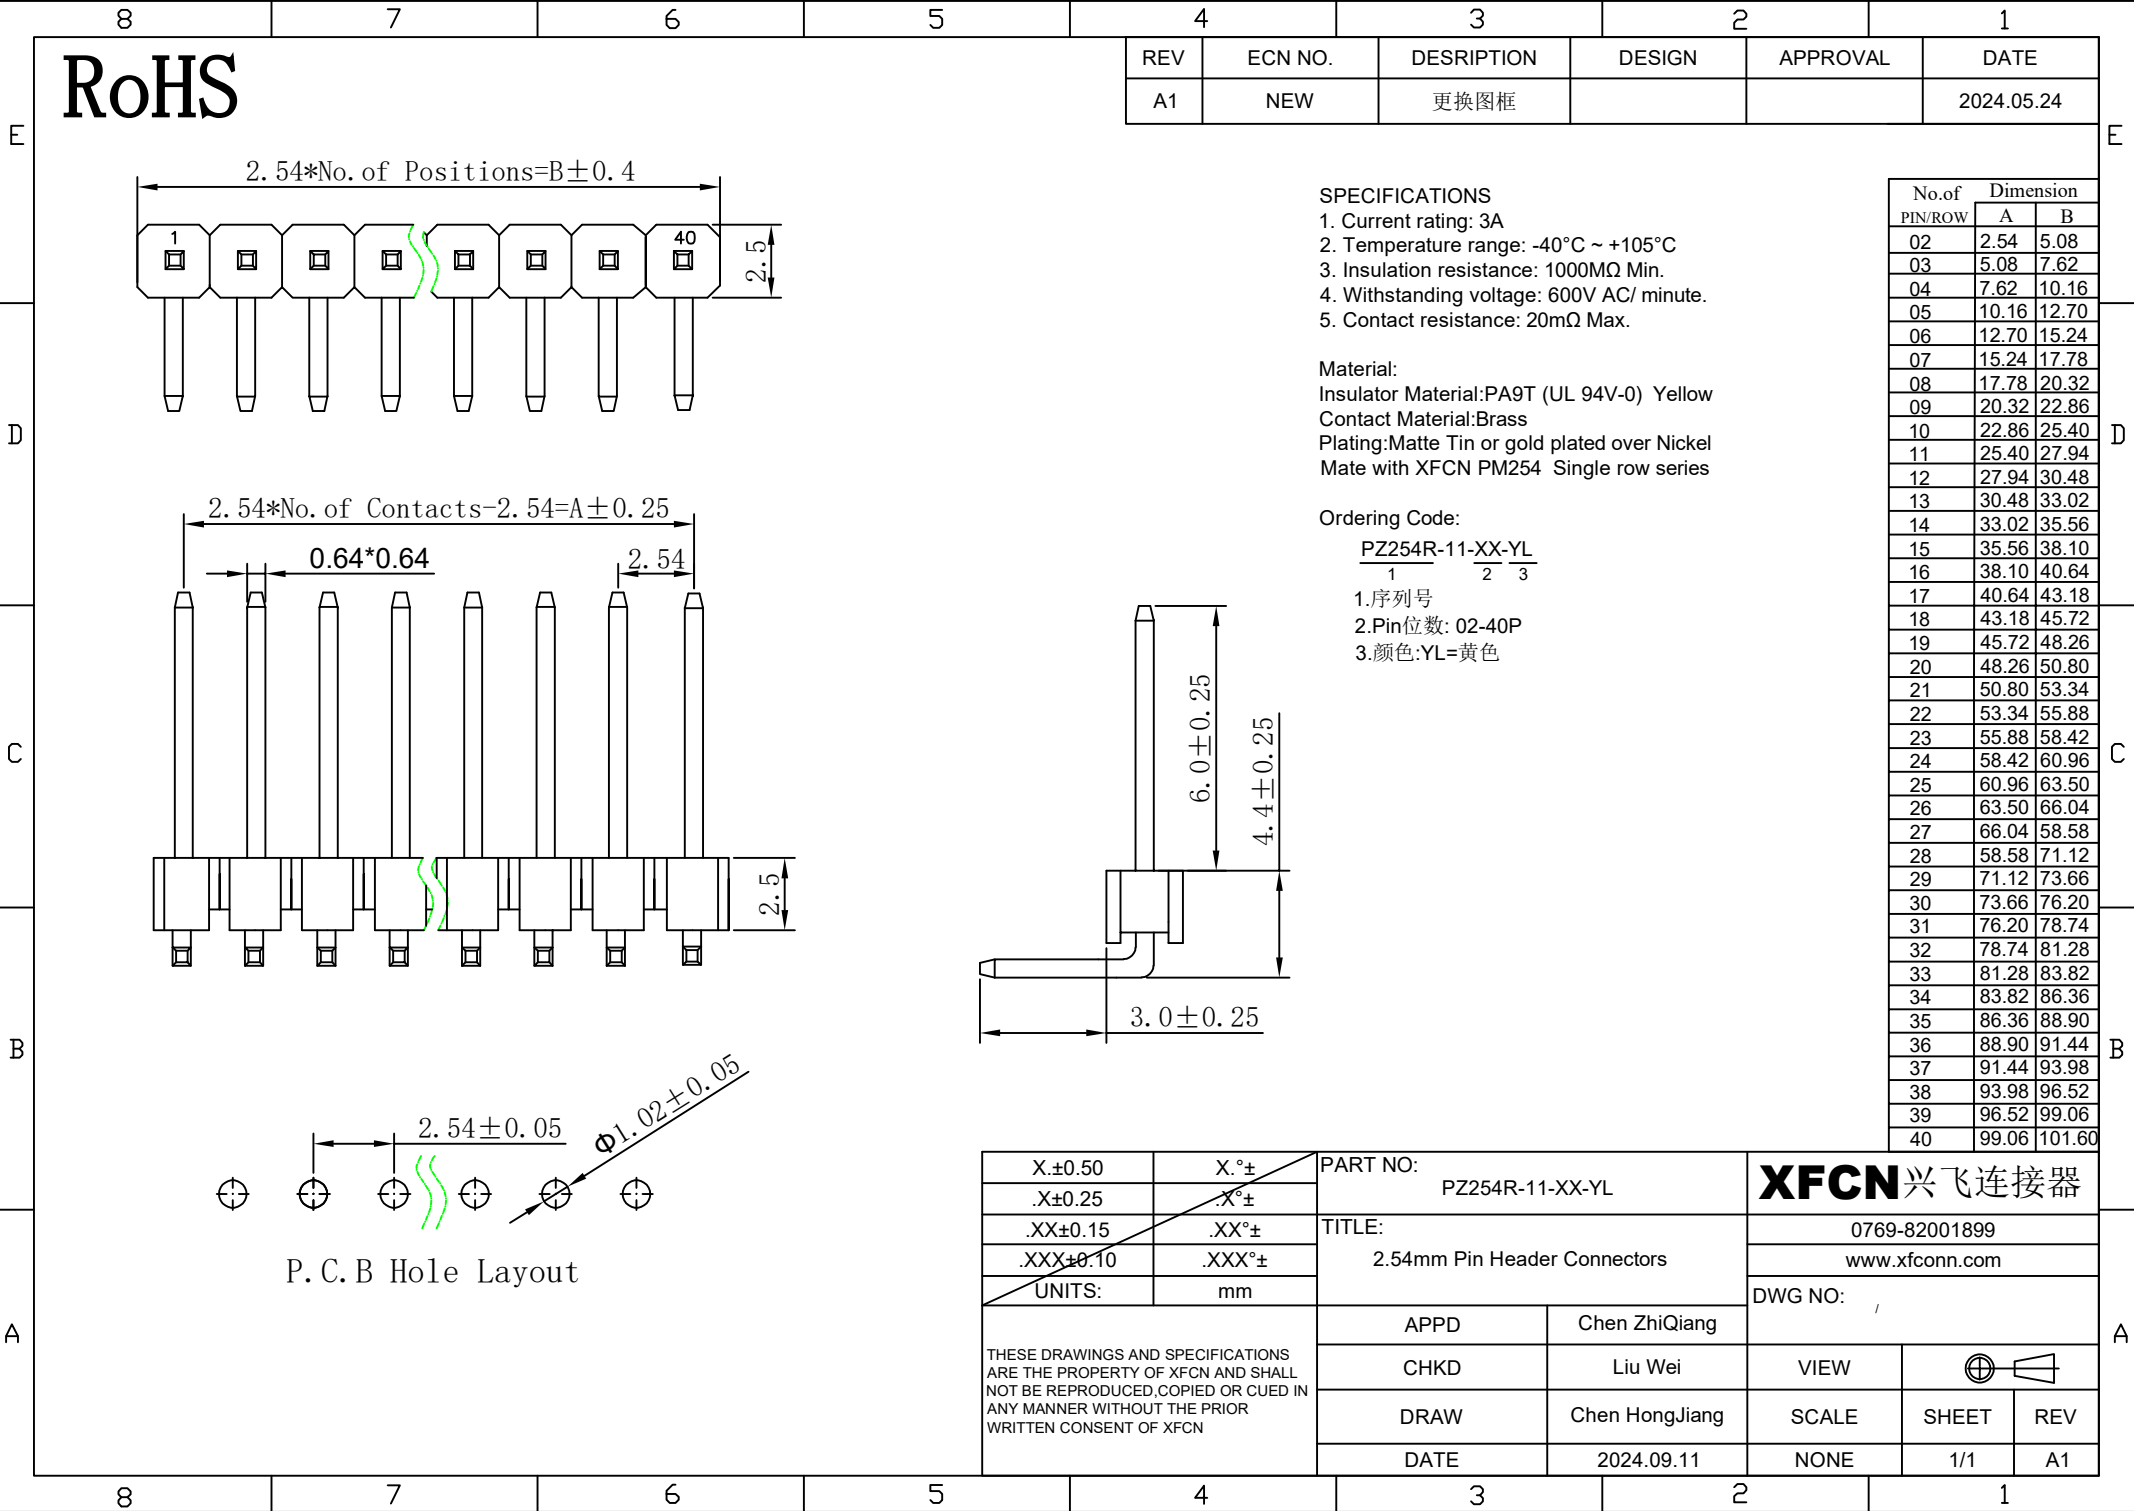

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

- SPECIFICATIONS
- Current rating: 3A
 - Temperature range: -40°C ~ +105°C
 - Insulation resistance: 1000MΩ Min.
 - Withstanding voltage: 600V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material:
Insulator Material:PA9T (UL 94V-0) Yellow
Contact Material:Brass
Plating:Matte Tin or gold plated over Nickel
Mate with XFCN PM254 Single row series

Ordering Code:
PZ254R-11-XX-YL
1 2 3
1.序列号
2.Pin位数: 02-40P
3.颜色:YL=黄色

No.of PIN/ROW	Dimension	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

X.±0.50	X.°±	PART NO: PZ254R-11-XX-YL		XFCN 兴飞连接器				
.X±0.25	.X°±							
.XX±0.15	.XX°±	TITLE: 2.54mm Pin Header Connectors		0769-82001899				
.XXX±0.10	.XXX°±			www.xfconn.com				
UNITS:	mm	DWG NO: 1		VIEW  SCALE SHEET REV				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN								
							APPD	Chen ZhiQiang
							CHKD	Liu Wei
		DRAW	Chen HongJiang	SCALE	SHEET	REV		
		DATE	2024.09.11	NONE	1/1	A1		