


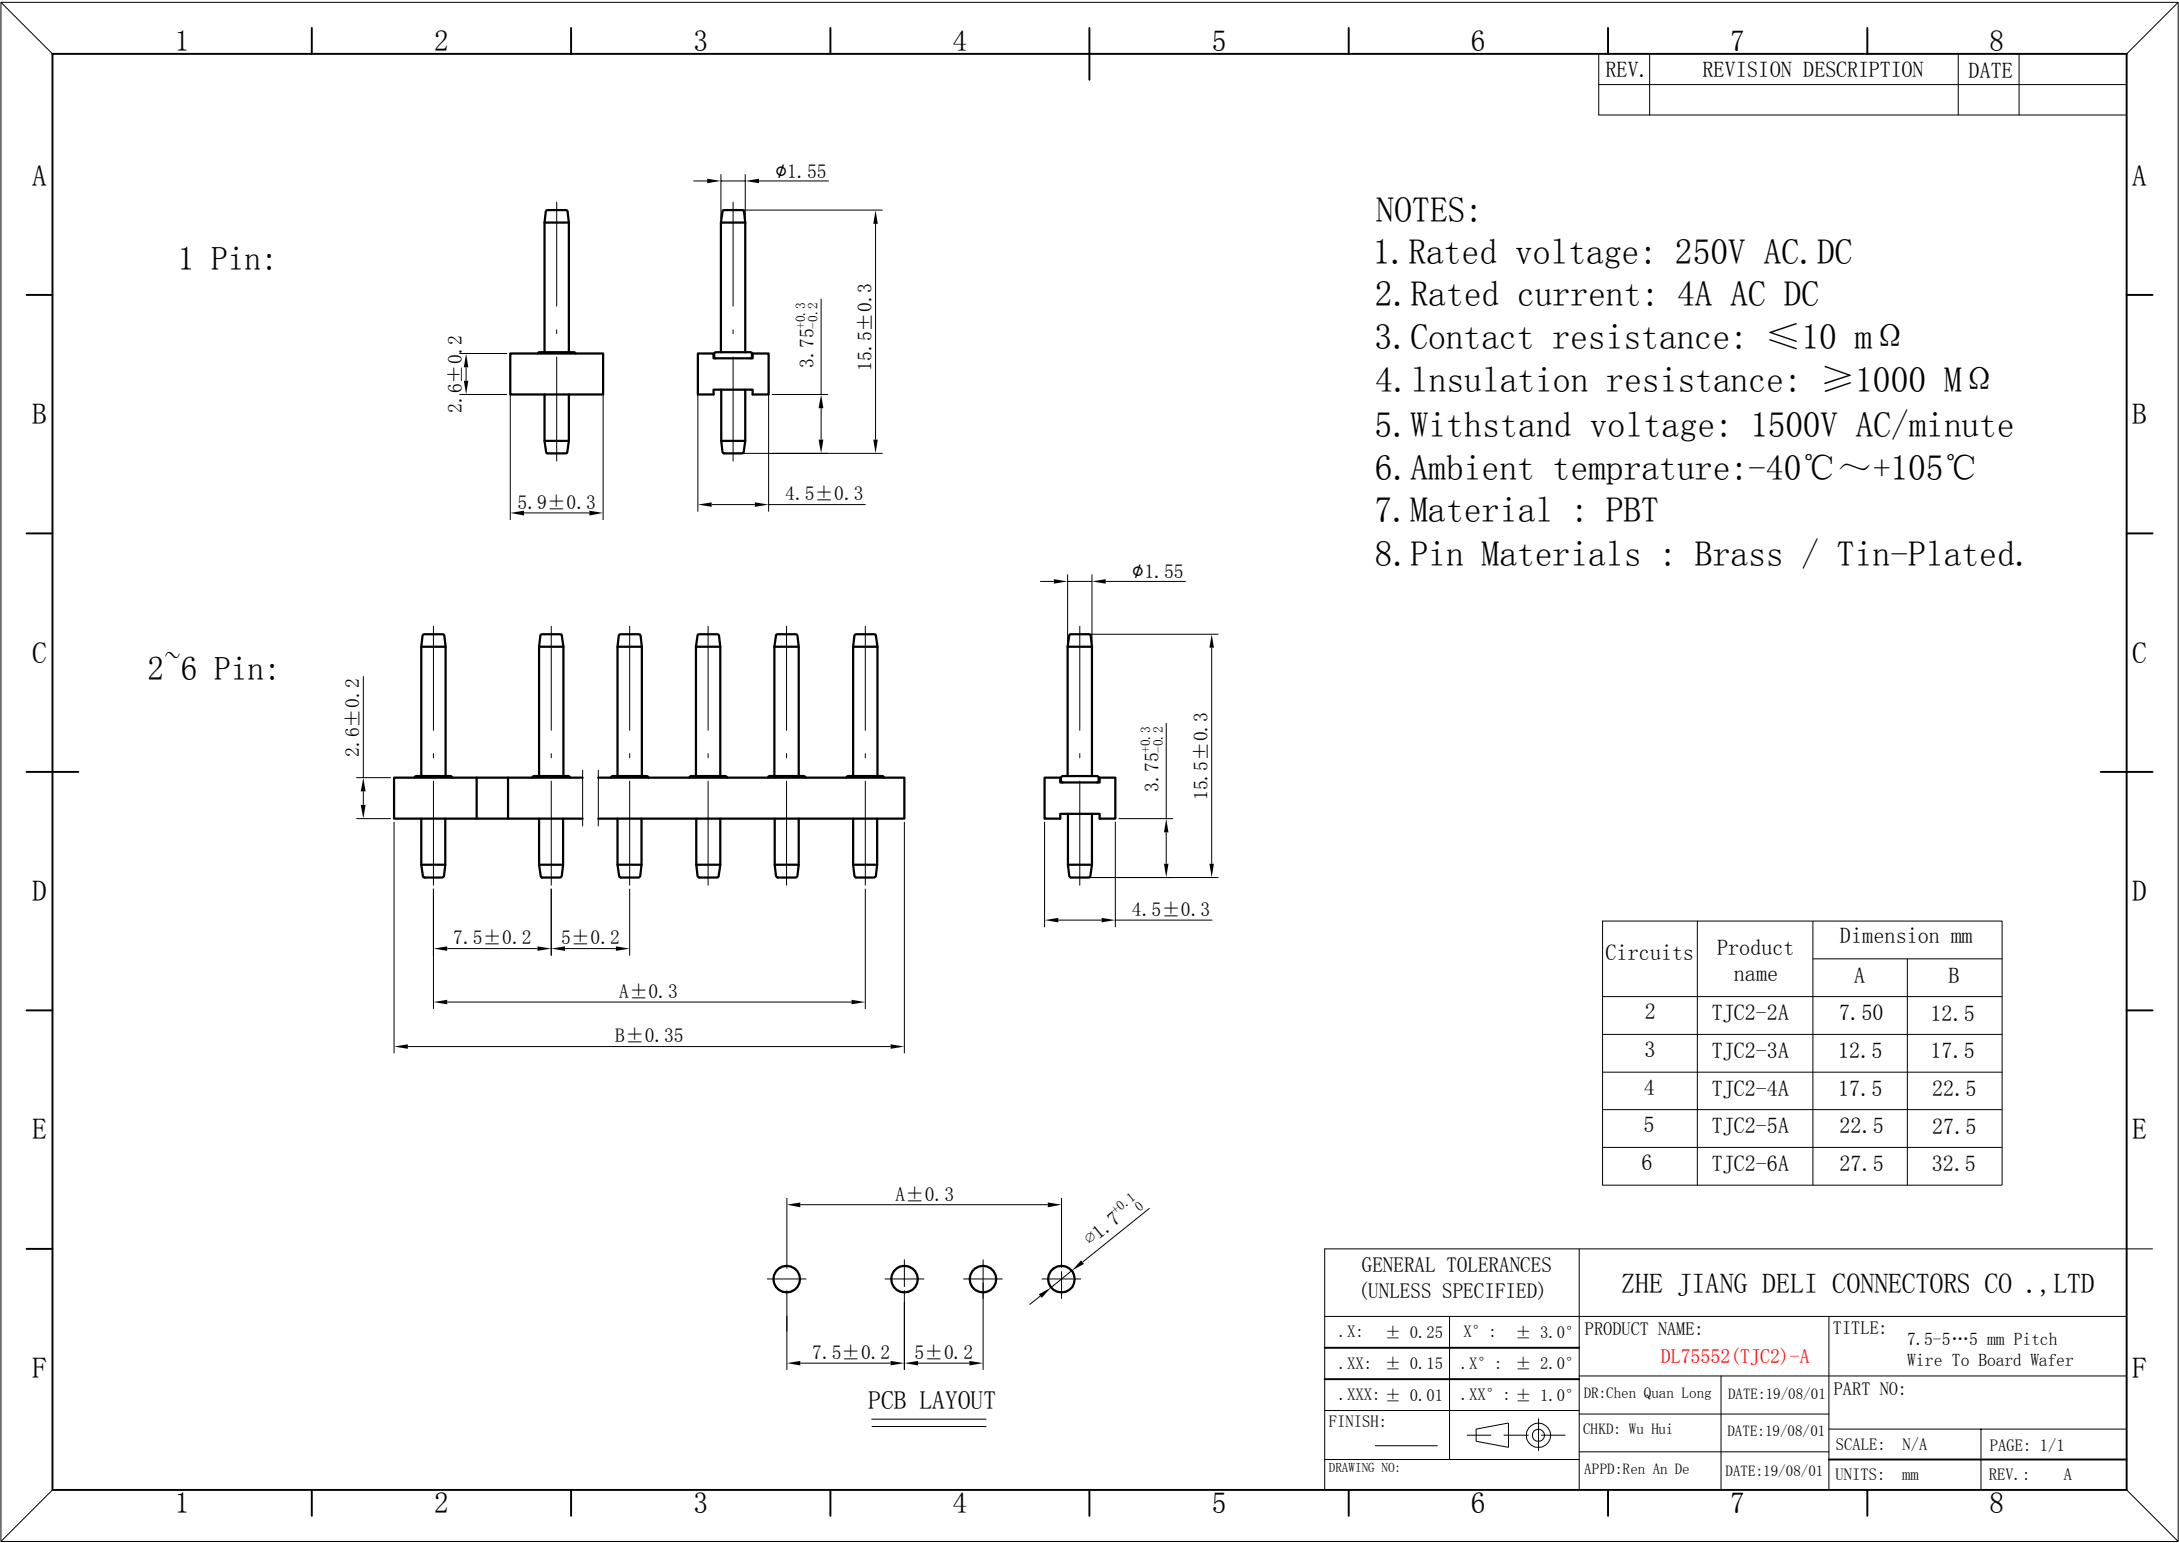

REV.	REVISION DESCRIPTION	DATE	


- NOTES:
- 1. Rated voltage: 250V AC.DC
 - 2. Rated current: 4A AC DC
 - 3. Contact resistance: $\leq 10\text{ m}\Omega$
 - 4. Insulation resistance: $\geq 1000\text{ M}\Omega$
 - 5. Withstand voltage: 1500V AC/minute
 - 6. Ambient temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 - 7. Material : PBT
 - 8. Pin Materials : Brass / Tin-Plated.

Circuits	Product name	Dimension mm	
		A	B
2	TJC2-2A	7.50	12.5
3	TJC2-3A	12.5	17.5
4	TJC2-4A	17.5	22.5
5	TJC2-5A	22.5	27.5
6	TJC2-6A	27.5	32.5





GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO.,LTD	
.X: ± 0.25	X° : $\pm 3.0^{\circ}$	PRODUCT NAME: DL75552(TJC2)-A	TITLE: 7.5-5...5 mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X° : $\pm 2.0^{\circ}$		
.XXX: ± 0.01	.XX° : $\pm 1.0^{\circ}$	DR:Chen Quan Long	DATE:19/08/01
FINISH:		CHKD: Wu Hui	DATE:19/08/01
DRAWING NO:		APPD:Ren An De	DATE:19/08/01
		SCALE: N/A	PAGE: 1/1
		UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

1 Pin:



2~6 Pin:

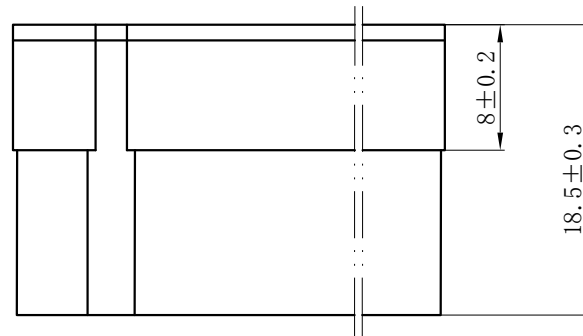

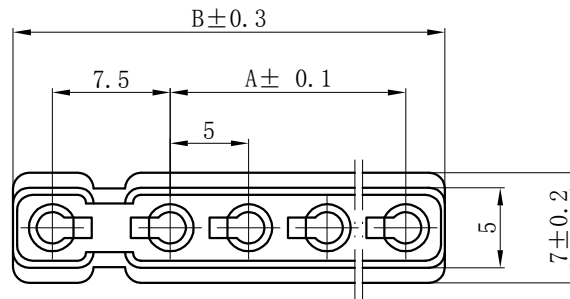


NOTES:


- Rated voltage: 250V AC.DC
- Rated current: 4A AC DC
- Contact resistance: $\leq 10\text{ m}\Omega$
- Insulation resistance: $\geq 1000\text{ M}\Omega$
- Withstand voltage: 1500V AC/minute
- Ambient temprature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
- Material : Nylon UL94V-0 (2)
- Matched RoHS criteria

Circuits	Product name	Dimensionmm	
		A	B
2	TJC2-2Y	—	12.8
3	TJC2-3Y	5.0	17.8
4	TJC2-4Y	10.0	22.8
5	TJC2-5Y	15.0	27.8
6	TJC2-6Y	20.0	32.8


GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO.,LTD	
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL75552 (TJC2)-Y	TITLE: 7.5-5...5 mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X° : ± 2.0°		
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:19/08/01
FINISH:		CHKD: Wu Hui	DATE:19/08/01
DRAWING NO:		APPD:Ren An De	DATE:19/08/01
		SCALE: N/A	PAGE: 1/1
		UNITS: mm	REV.: A

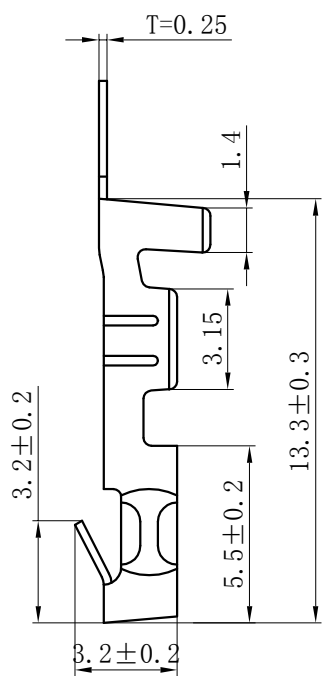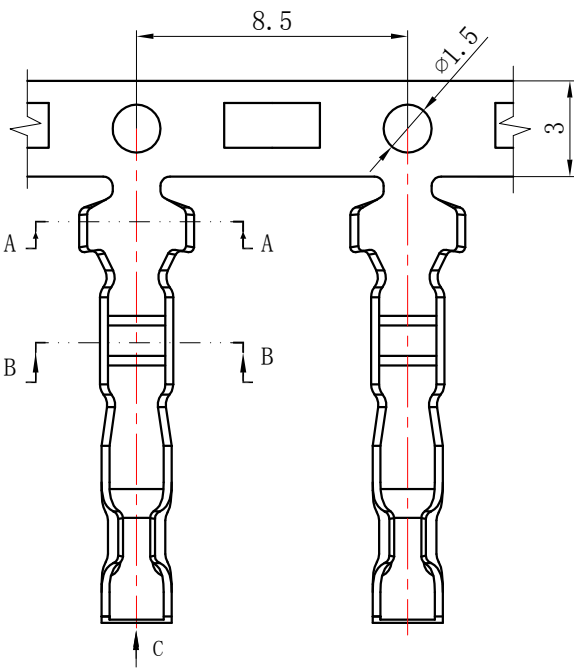

SECTION A-A



SECTION B-B



SECTION C-C

NOTES

Used in DL75552-Y Series Housing.

Accepts AWG #26~20 Wire Range.

0.13~ 0.5 mm² .

Insulation O.D.=1.3~2.7 mm.

Material : Phosphor Bronze .

Finish: Tin plated.

Qty/Reel: 6,000 PCS.

Thickness: 0.25 mm.

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO.,LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL75552 (TJC2)-T		TITLE: 7.5-5...5mm Pitch Wire To Board Crimp Terminal	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:19/08/01	PART NO:	
FINISH:		CHKD: Wu Hui	DATE:19/08/01	SCALE: N/A	PAGE: 1/1
DRAWING NO:		APPD:Ren An De	DATE:19/08/01	UNITS: mm	REV.: A