



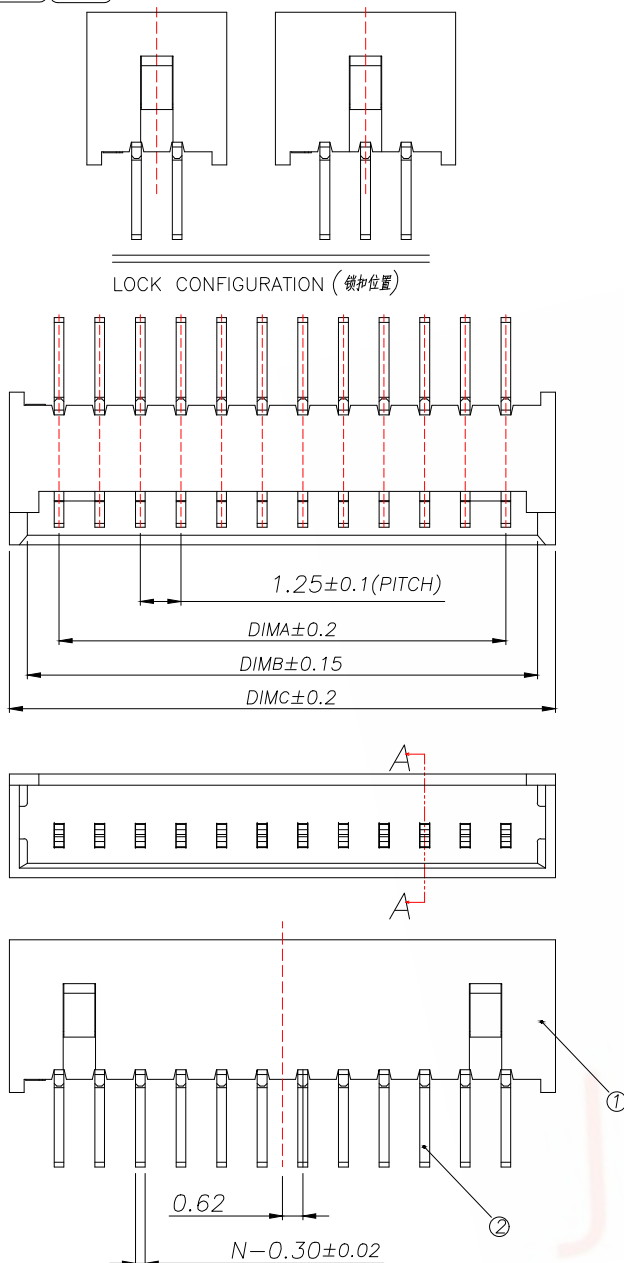

序号	品名	材质
1	1.25 Pitch S/T Wire To Board Housing DIP(H=4.7)	PA66 UL94V-2 Red
2	1.25 Pitch S/T Wire To Board Terminal DIP(H=4.7)	Copper Alloy/ Tin Plating

Technical Index:


- 1.The surface of the plastic parts should be smooth,no rough edges,no obvious shrinkage,defects,cracks and other phenomena)
- 2.Lock Configuration: 2 to 3Pin is 1, ≥ 4 Pin is 2
- 3.Temperature range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 4.Rated voltage: 125V, AC/DC.
- 5.Contact resistance: $\leq 0.02\Omega$.
- 6.Insulation resistance: $\geq 100\text{M}\Omega$

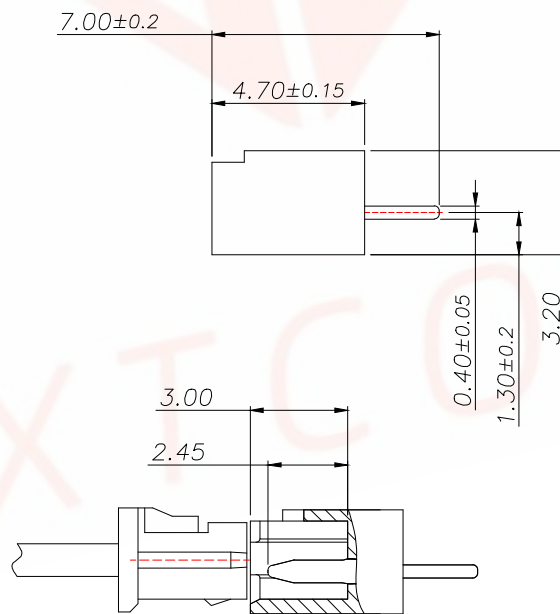

SECTION A-A

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

Part No	Pin	A	B	C
A125F1L1-2R2P12	2	1.25	3.20	4.30
A125F1L1-2R3P12	3	2.50	4.45	5.55
A125F1L1-2R4P12	4	3.75	5.70	6.80
A125F1L1-2R5P12	5	5.00	6.95	8.05
A125F1L1-2R6P12	6	6.25	8.20	9.30
A125F1L1-2R7P12	7	7.50	9.45	10.55
A125F1L1-2R8P12	8	8.75	10.70	11.80
A125F1L1-2R9P12	9	10.00	11.95	13.05
A125F1L1-2R10P12	10	11.25	13.20	14.30
A125F1L1-2R11P12	11	12.50	14.45	15.55
A125F1L1-2R12P12	12	13.75	15.70	16.80
A125F1L1-2R13P12	13	15.00	16.95	18.05
A125F1L1-2R14P12	14	16.25	18.20	19.30
A125F1L1-2R15P12	15	17.50	19.45	20.55
A125F1L1-2R16P12	16	18.75	20.70	21.80
A125F1L1-2R17P12	17	20.00	21.95	23.05
A125F1L1-2R18P12	18	21.25	23.20	24.30
A125F1L1-2R19P12	19	22.50	24.45	25.55
A125F1L1-2R20P12	20	23.75	25.70	26.80

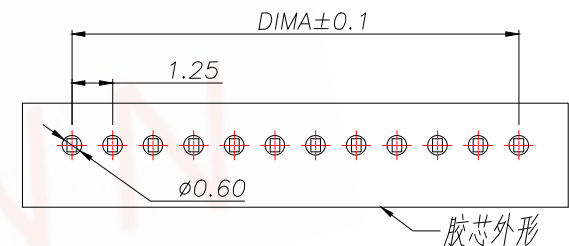

适用线路板(PCB LAYOUT)

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd		
X.X:±0.35	X.X':±3"	PART NO. A125F1L1-2RXP12	TITLE: Socket-type terminal Vertical plug	
X.XX:±0.25	X.XX':±2"		MANUFACTURE DWG	
X.XXX:±0.15				
UNITS	mm	DESIGN: Ethan	 SCALE N:A	SHEET 1/1
MATERILA	---	CHED: Olvia		
FINISH	---	APPD: Ava		