
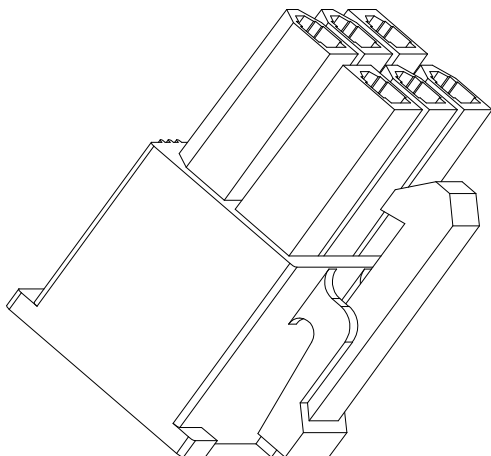
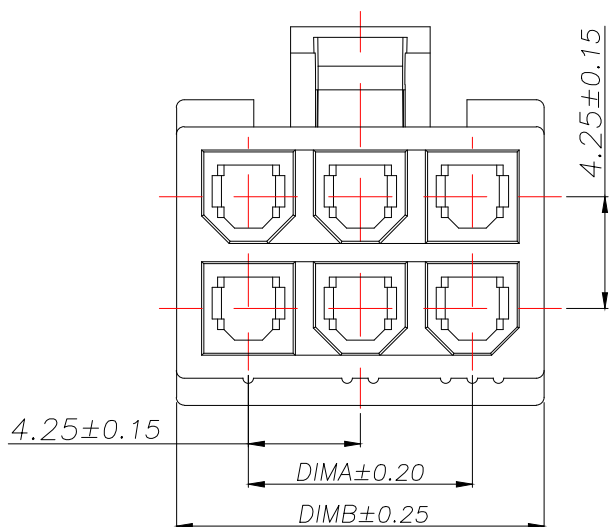
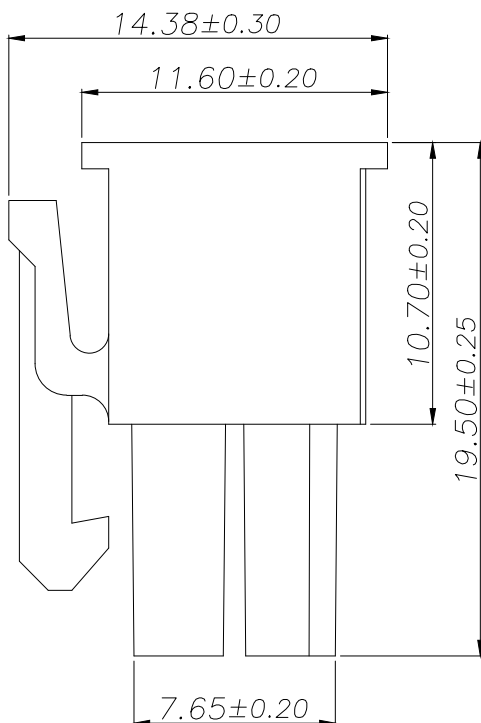


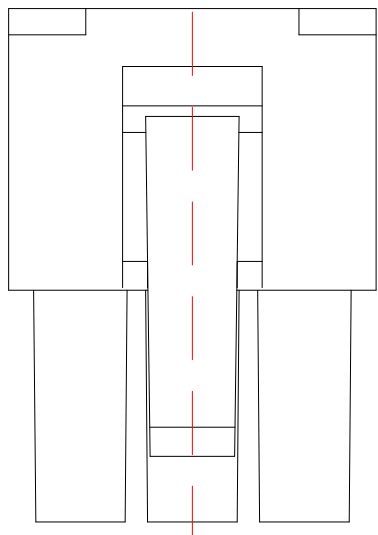

技术指标:

1. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. 额定电压: 250V AC,DC.
3. 耐压: 1500V AC/minute.
4. 接触电阻: $\leq 20\text{m}\Omega$.
5. 绝缘电阻: $\geq 1000\text{M}\Omega$.
6. 额定电流: 5A AC,DC.

型号	CKT	A	B
5557-2*1Y	2*1	0.00	5.50
5557-2*2Y	2*2	4.20	9.70
5557-2*3Y	2*3	8.40	13.90
5557-2*4Y	2*4	12.60	18.10
5557-2*5Y	2*5	16.80	22.30
5557-2*6	2*6	21.00	26.50
5557-2*7Y	2*7	25.20	30.70
5557-2*8Y	2*8	29.40	34.90
5557-2*9Y	2*9	33.40	39.10
5557-2*10Y	2*10	37.80	43.30
5557-2*11Y	2*11	42.00	47.50
5557-2*12Y	2*12	46.20	51.70

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd				
X.X ±0.30	X.* ±5°	PART NO. 5557-NY		TITLE: WBM4.2MM HOUSING		
.XX ±0.25	X.X* ±1°					
.XXX ±0.15		DESIGN: Ethan		MANUFACTURE DWG		
UNITS	mm					
MATERILA	— — —	CHED: Olvia			SCALE	SHEET
FINISH	— — —	APPD: Ava			N:A	1/1