


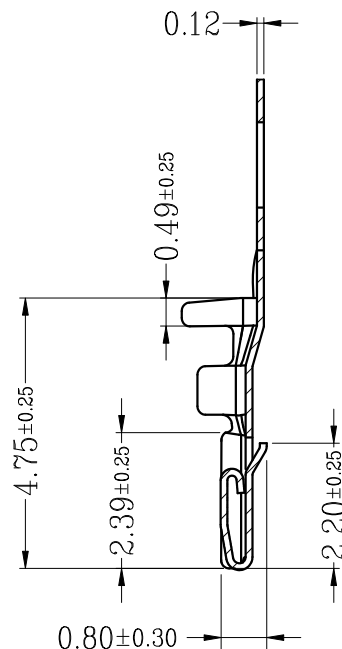



E		F	
版次	变更摘要	日期	
0	新产品发行	2022/11/04	
1	料号更新	2025/05/14	

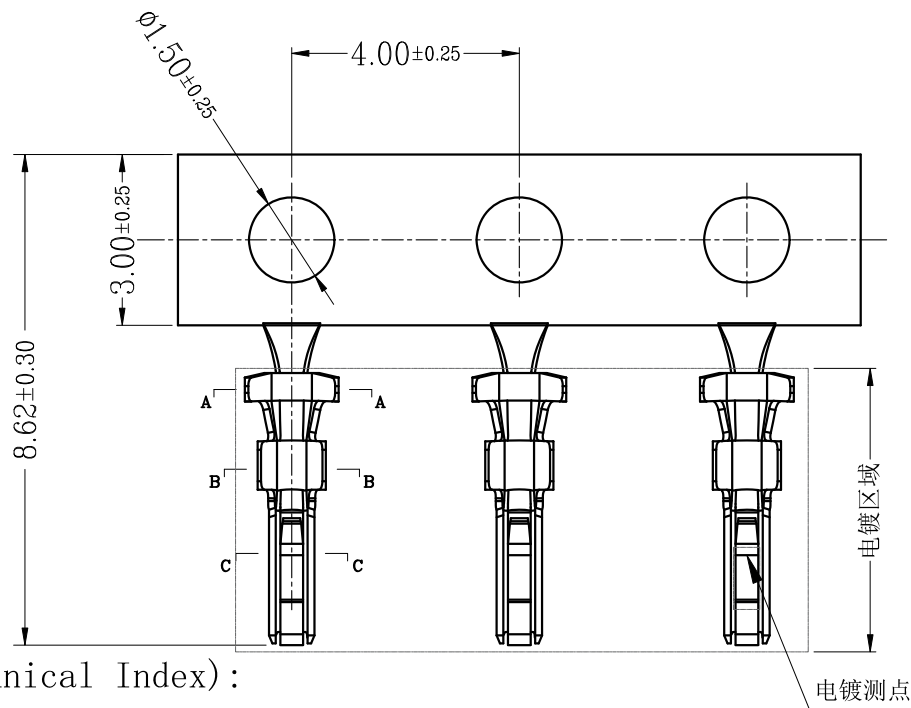

SEC:A-A



SEC:B-B



SEC:C-C

技术指标(Technical Index):

- 工作温度(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 额定电压(Rated voltage): 50V DC/AC.
- 额定电流(Rated current): 1.0A.
- 接触电阻(Contact resistance):
 $\leq 20\text{m}\Omega$ (Initial) per contact,
 $\leq 40\text{m}\Omega$ Change allowed.
- 耐压值(Dielectricwithstanding voltage): 500V AC/minute.
- 绝缘电阻(Insulation resistance): $\geq 100\text{M}\Omega$.
- 适用线规(Apply to gauge): AWG#32~AWG#28. (O.D 0.6mm Max)
- 产品料号(Product material No.):

WB100B0—T 0 * * — **

Material(端子材料)

0:C5191R-EH

规格流水号

Plating(端子状态&电镀方式)

1:全镀金(G/F OVERALL)

3:全亮锡

9:未镀



一般公差 (TOLERANCE)
X ± 0.50 .XX ± 0.10
X ± 0.20 .XXX ± 0.05
ANGLES $\pm 1^{\circ}$

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO.,LTD

品名 (TITLE)
1.00 Pitch B型双排4代公头端子

料号 (DWG.NO)
WB100B0-T0**-**

比例 (SCALE)
1:1

单位 (UNITS)
mm

张数 (SHEET)
1 OF 1

尺寸 (SIZE)
A4

版本 (REV)
A

制图 (DR)
Anlan

校对 (CHKD)
李绍宗

审核 (APPD)
黄志明