
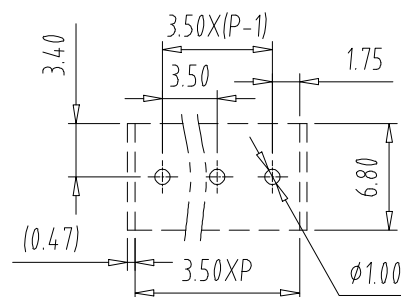

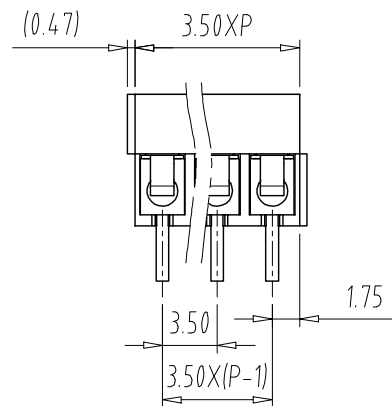


注: 未经许可禁止传播、复制、编辑该文档, 以及利用其内容进行交流



PCB Layout

Pitch Range In mm			Nominal Dimension Range In mm							—	∩	□
TO	Over 6	Over 10	TO	Over 30	Over 60	Over 100	Over 150			0.1/10		
6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150				<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2°		

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	7A	/	10A
Rated Voltage	300V	/	300V

2.Torque value: M2, 1.77Lb.in

3.Wire range: 24-18AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	250V	320V
Rate Current(A)	10A	10A	10A

2. Torque value: M2, 0.2Nm

3.wire range: 0.5-1.0mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Copper alloy(Sn Plated)

3.Spring: Stainless Steel

4.Screw: Steel(M2,Zn Plated)

NOTES3:

1.Pitch: 3.5mm Poles: 02-24P

2.Stripping length: 5-6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

MX350	-	3.5	-	XXP	-	XXXX	-	XX	-	X	-	X
产品型号		间距		颜色:		极数						A-Z其他定制
				灰色:GY		橙色:OE		01:常规颜色				0:Y一字螺丝
				蓝色:BU		红色:RD		02-99:定制颜色				1:S十字螺丝
				黑色:BK		透明色:TT						2:PS平头十字螺丝
				绿色:GN		黄色:YW						Cu:铜方块
				透明色:TT		白色:WE						Fe:铁方块

ITEM	NAME OF PART		NO. OF PART		Q"TY		MATERIAL		NOTE	
DWG.	CKK	DATE	23.09.05		UNITS	MM	SHEET/OF	1/1		
CHK.		DATE			SCALE	1:1	A4			
APP.		DATE								
					NAME	MX350-3.5-XXP				
					DWGNO.					



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪市迈旭电子有限公司