

RoHS

Specifications(规格):

- 1.Impedance(特性阻抗): 50Ω;
- 2.Frequency (工作频率): DC~6GHz;
- 3.VSWR (电压驻波比): 1.50@3GHz; 1.60@6GHz;
- 4.Insulation resistance(绝缘阻抗): ≥100MΩ;
- 5.Dielectric withstand voltage (介质耐电压): 800V AC;
- 6.Mating cycles (耐久性): ≥25 cycles;
- 7.Engagement force(啮合力): ≤ 25N;
- 8.Retention force latch(保持力): ≥110N;
- 9.Temperature range(使用温度):
-40℃~+105℃;

PART NO.:

XZ X X -K1M- XXXX -K1F- X X
① ② ③ ④ ⑤

① Cable TYPE:

- 3: RG174
- 4: 1.5DS
- 6: RG58
- 7: Dacar302
- 8: RG174LL
- 9: RG58LL


② Successive number: 1~Z

③ Length (mm): 1000=1000mm


④ Coding A: A~Z

⑤ Coding B: A~Z

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.10.28	

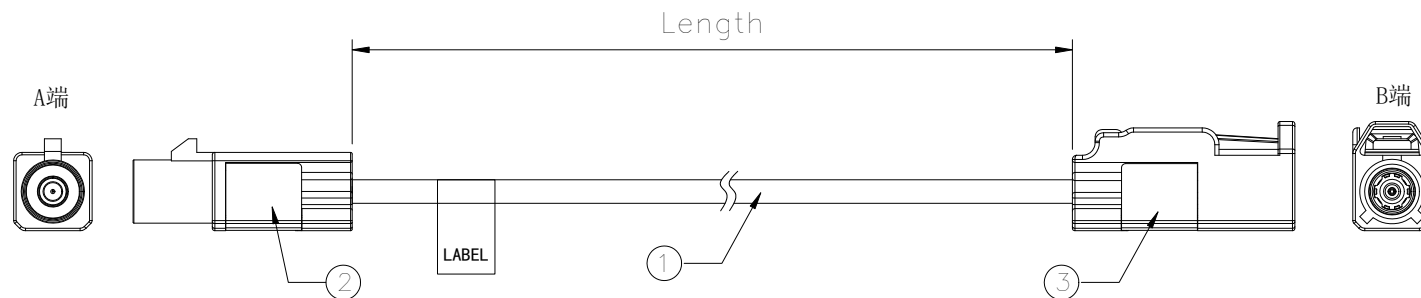

接点表(Wiring Table)

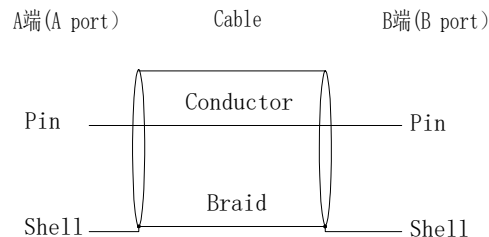

PART NO.	Length (mm/inch)	TOLERANCES (mm/inch)
XZ71-K1M-500-K1F-ZZ	500 [19.685]	±10 [0.394]
XZ71-K1M-1000-K1F-ZZ	1000 [39.370]	±15 [0.591]
XZ71-K1M-1500-K1F-ZZ	1500 [59.055]	±15 [0.591]
XZ71-K1M-2000-K1F-ZZ	2000 [78.740]	±20 [0.787]
XZ71-K1M-3000-K1F-ZZ	3000 [118.110]	±30 [1.181]
XZ71-K1M-5000-K1F-ZZ	5000 [196.851]	±60 [2.362]

3	Connector	FAKRA Female connector,Z Code	1SET	
2	Connector	FAKRA Male connector,Z Code	1SET	
1	Cable	RTK031 Cable PVC OD3.30 Black,-40~105℃		
NO.	NAME	SPEC.	Q'TY	NOTE

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKLB 星坤
Connection

XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	希文	VIEW:	MODEL TYPE: Assembly cable, FAKRA series
CHECKED		UNIT: mm/in	PART NO.: XZ71-K1M-XXXX-K1F-ZZ
APPROVED		SIZE: A4	DWG NO.: X-XZ71-K1M-XXXX-K1F-ZZ

SCALE	PAGE	REVISION
N/A	1/1	A0