

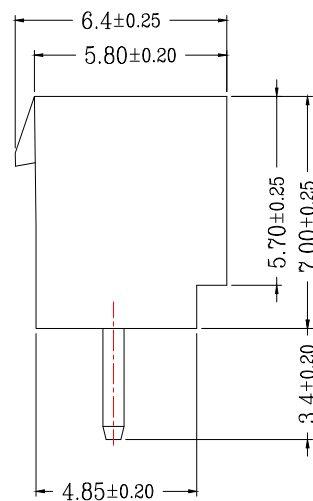




D		E		F	
版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2019/07/20			

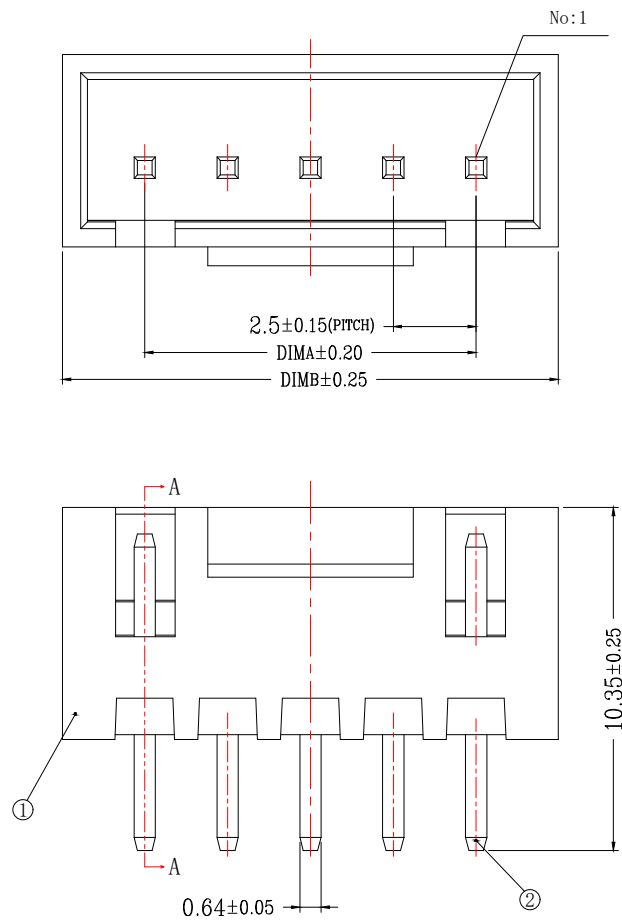

TYPE 1 (无K脚)

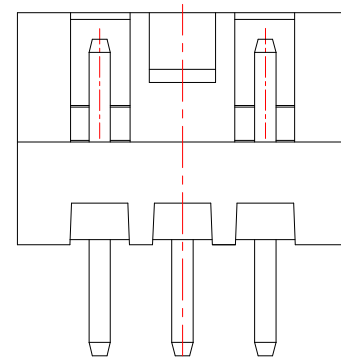

3PiN

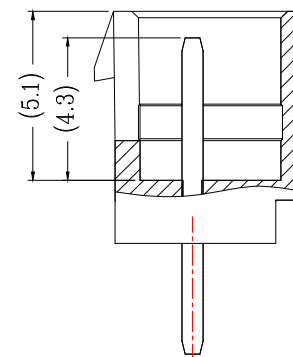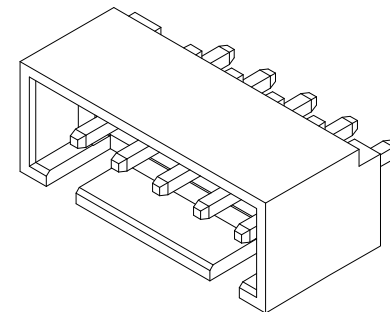

SECTION A-A


CKT	A	B	CKT	A	B
2	2.5	7.5	10	22.5	27.5
3	5.0	10.0	11	25.0	30.0
4	7.5	12.5	12	27.5	32.5
5	10.0	15.0	13	30.0	35.0
6	12.5	17.5	14	32.5	37.5
7	15.0	20.0	15	35.0	40.0
8	17.5	22.5	16	37.5	42.5
9	20.0	25.0	17	40.0	45.0

IB Bossie (博锡)

品名 (TITLE)		HA2.5直针WTB		制图 (DR)		ANLAN	
料号 (DWG.NO)		BX-HA2.54-n*PZZ-GW		校对 (CHKD)		李绍宗	
比例 (SCALE)		1:1		审核 (APPD)		黄志明	
单位 (UNITS)		mm		张数 (SHEET)		1 OF 1	
				SIZE		A4	
				REV		A	

技术指标(Technical Index):

1. 温度范围(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
2. 额定电压(Rated voltage): 250V, AC.
3. 额定电流(Rated current): 3.0A AC, DC.
4. 接触电阻(Contact resistance): $\leq 20\text{m}\Omega$.
5. 耐压值(Withstanding voltage): 1000V AC/minute.
6. 绝缘电阻(Insulation resistance): $\geq 1000\text{M}\Omega$.

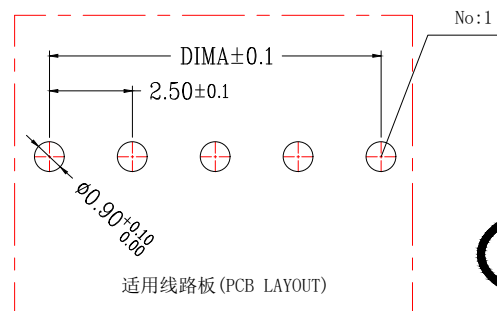

一般公差(TOLERANCE)

X. $\pm .50$	.XX $\pm .10$
.X $\pm .20$	.XXX $\pm .05$
ANGLES $\pm 1^\circ$	