

产 品 基 本 参 数




安倍:15A 电压:300V

胶壳: 尼龙66工程塑料, UL 94V-0阻燃等级


温度: 110° C (UL), -40° C to T110° C (IEC)

触点材料: 黄铜 (H65) 环保, 镀亮锡

接线位数: 2位-24位

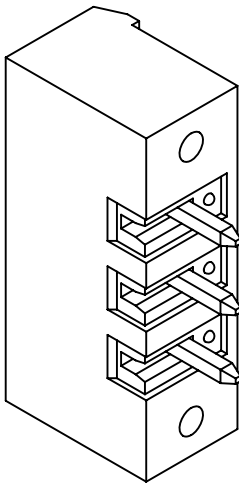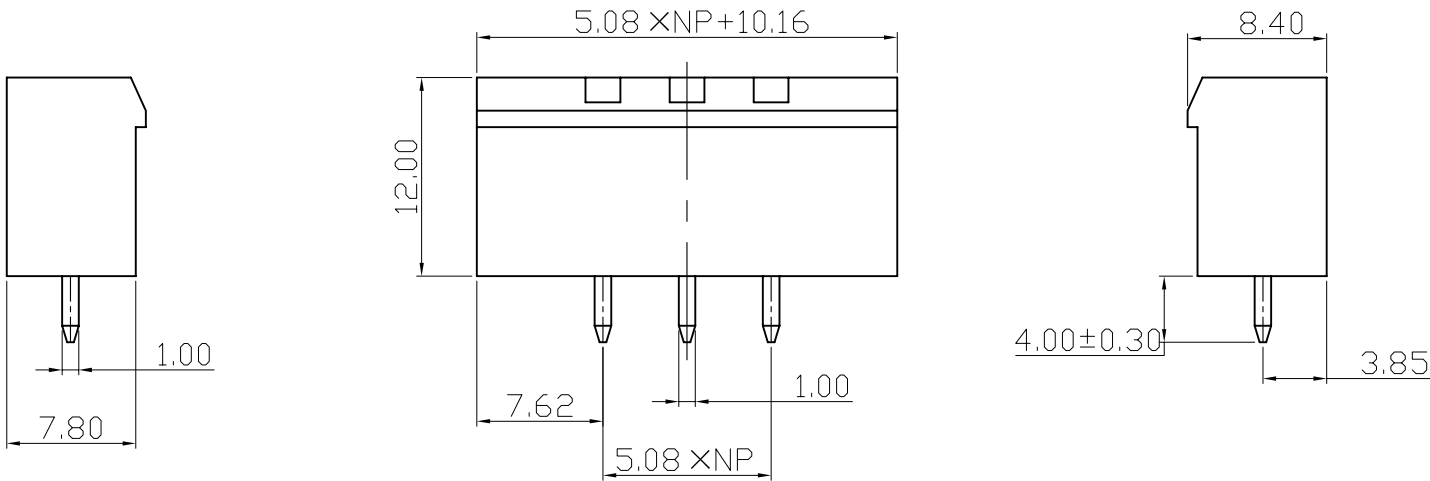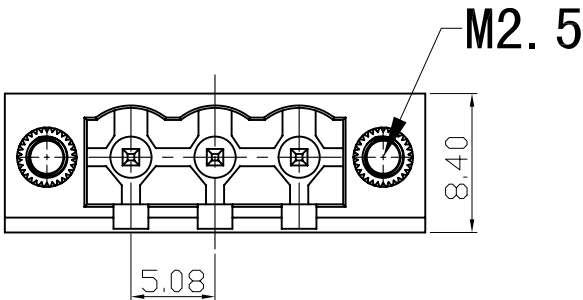

PCB LAYOUT

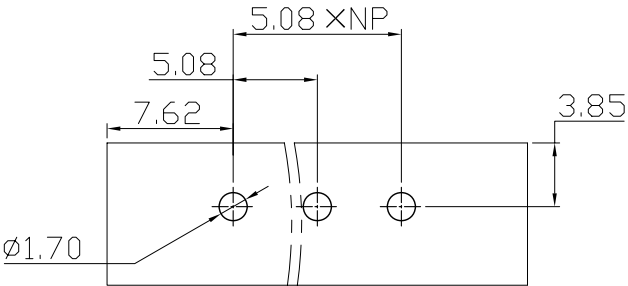

		new			2015/5/3		A		瀚源	
ECN BO.		DESCRIPTION.			DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1		
Mikey	Tom	Jerry	PART NAME	2EDGVM-5.08-XXP	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25			
			MODEL NAME	2EDGVM-5.08-XXP			X.x ±0.20			
			3RD ANGLE PROJ	HanElectricity Co.,LTD				X.xx ±0.15		
							ANGULAR ±3°			
							FILE.NO.			